

RESOURCE GUIDE | CENTRAL PLAINS | KS, MO, NORTHWEST AR, NORTHEAST OK

LIFETIME TRANSFERABLE LIMITED WARRANTY

Oldcastle® APG, Inc. ("Belgard") is proud to inform you that all of our interlocking concrete paver and retaining walls ("Products") meet and/or exceed the requirements of ASTM C-936 and ASTM C-1372. Belgard® guarantees its Products against these standards for the lifetime of the Product defined by ICPI. This guarantee does not apply to splitting, chipping or other breakage that could be caused by impact, abrasion or overloading. This warranty is transferable. The original proof of purchase is required.

This warranty is only valid if the material is installed under the guidelines of the ICPI (www.ICPI.org), The NCMA (www.ncma.org) or the Belgard Installation Guideline Manual. Improper installation voids this warranty. This warranty is for residential applications only and does not apply to commercial applications. It is recommended that the job be installed by a Belgard Contractor Program participant who guarantees their workmanship for a minimum of 3 years from the date of install. For warranty service, contact Belgard at 877-BELGARD. A service representative will investigate your claim within 10 business days. If the Belgard product fails to meet the specifications, Belgard will replace the defective product at no charge. Color matching cannot be guaranteed. Belgard will not be responsible for any replacement labor, consequential damages or incidental damages. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Some states do not allow for the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

For specific information regarding warranty coverage and exclusions in regards to the Elements[™] and Porcelain Paver products, please visit: Belgard.com/Warranty.

ABOUT US

At Belgard[®], we take our role as industry leaders seriously. Our rigorous research and development program is centered on innovation and quality. We never take it for granted that our products are the best in the business and constantly strive to improve and take the industry to the next level. Our overarching goal is to continue to find new and exciting ways to create beautiful outdoor spaces while maintaining incredibly high standards for product quality and performance.

Since 1995, our locally made and nationally backed products have transformed thousands of residential and commercial properties across North America. With more shapes, styles and textures than any other brand, Belgard's Outdoor Living paving and wall products aren't just functional, they infuse outdoor spaces with distinctive atmosphere and style.

Every day, our network of Belgard Authorized Dealers and Contractors helps customers realize their outdoor dreams. And every year, we strive to improve our product and service offerings by dedicating more than 20,000 hours to research and development. By staying ahead of design trends, we are able to provide design-forward products that homeowners envision for their backyard spaces.

All of our outdoor products—when installed by a Belgard Authorized Contractor—are covered by a transferable lifetime limited warranty. That's just part of our commitment to lasting outdoor beauty.

PAVERS & SLABS

PAVERS & SLABS INSTALLATION GUIDE

4 Interlocking Concrete Pavement

PAVERS & SLABS

5 Basalt[™]

25 Holland Stone

29

31

33

33

35

Mega-Arbel®

Melville[™] Plank

Melville[™] Slab

Origins[™] 6

Origins[™] 12

Origins[™] 18


- 7 Belgian Cobble[®] 27
- 8 Brooklyn[™]
- 10 Charlestone[™]
- 12 Dimensions[™] 6
- 12 Dimensions[™] 12
- 14 Dimensions[™] 18
- 17 Dimensions[™] Slab
- 20 Dimensions[™] Accent & Origins[™] Accent
- 21 Dublin Cobble
- 23 Geometric Shapes


For basic paver installation information visit icpi.org


3 BELGARD[®] RESOURCE GUIDE | BELGARD.COM | 877-235-4273

INTERLOCKING CONCRETE PAVEMENT (ICP)

PATIO/WALK/RESIDENTIAL DRIVEWAY WITH PLASTIC EDGE RESTRAINT CROSS SECTION




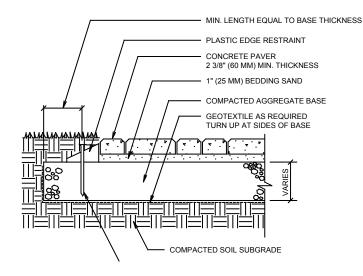

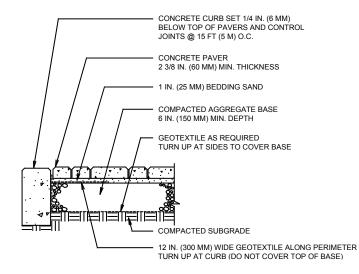

PATIO/SIDEWALK ON COMPACTED AGGREGATE BASE CROSS SECTION

SWIMMING POOL DECK AND COPING CROSS SECTION

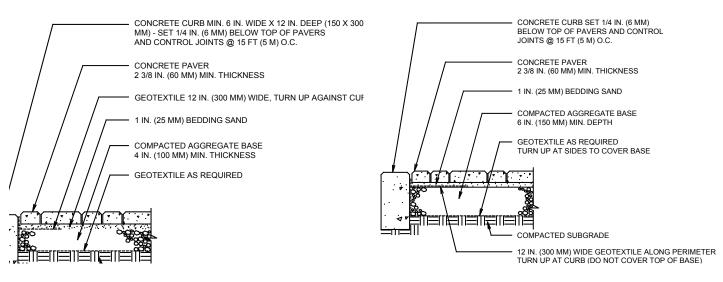








Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	TRUECOLOR PROCESS
ß			0	E	Ô
✓					✓

SHAPES & SIZES

Slab



18 x 36 x 23/8

UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ LAYER	UNITS/ SQFT	WEIGHT/ PALLET
			SLAB				
18 X 36 X 23⁄8	90	9	10	20	-	-	2578.7

BASALT™

NOTES:


AutoCAD[®] hatch pattern files can be downloaded from belgard.com for use in architectural drawings

BELGARD.COM | 877-235-4273


Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

Percentages are based on area by paver.

1-PIECE RUNNING BOND PATTERN



1-PIECE HERRINGBONE PATTERN



BELGIAN COBBLE[®]





Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA
ß			0	E
✓	✓		✓	

SHAPES & SIZES

Multi-Piece



Variable x 23/8

UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ LAYER	UNITS/ SQFT	WEIGHT/ PALLET		
MULTI-PIECE									
VARIABLE X 23/8	68	-	-	320	-	-	1640		

Lay pavers at random.







Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	T2 PROCESS
Ŕ			0	E	$\widehat{\mathbb{T}}^2$
✓	✓				✓

SHAPES & SIZES

60mm



UNIT	SQFT/ Pallet	SQFT/ Layer	LAYER/ PALLET	UNITS/ Pallet	UNITS/ Layer	SQFT/ Unit	WEIGHT/ Pallet	LNFT/PALLET (Soldier)	LNFT/PALLET (SAILOR)
60MM									
3 X 9 X 2¾	103.13	10.3	10	550	55	.188	2805	137.5	412.5

BROOKLYN[™]

NOTES:


AutoCAD[®] hatch pattern files can be downloaded from belgard.com for use in architectural drawings.

BELGARD.COM | 877-235-4273


Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

Percentages are based on area by paver.


1-PIECE RUNNING BOND PATTERN



1-PIECE BASKET WEAVE PATTERN



1-PIECE HERRINGBONE PATTERN







Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	TRUECOLOR PROCESS
Ŕ			0	E	Ô
✓	✓				✓

3-Piece Modular

SHAPES & SIZES

Available for Mechanical Installation



6 x 6 x 2³/₈





WEIGHT/ LNFT/PALLET LNFT/PALLET SQFT/ SQFT/ LAYER/ UNITS/ UNITS/ SQFT/ UNIT PALLET LAYER PALLET PALLET LAYER UNIT PALLET (SOLDIER) (SAILOR) **3-PIECE MODULAR** 6 X 6 X 23/8 15 1.5 10 60 6 210 _ _ 6 X 9 X 23/8 45 4.5 10 120 12 210 _ 6 X 12 X 23/8 45 4.5 10 90 9 210 _ _

BELGARD.COM | 877-235-4273

CHARLESTONE™


3-PIECE PATTERN A

NOTES:

AutoCAD[®] hatch pattern files can be downloaded from belgard.com for use in architectural drawings

Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

Percentages are based on area by paver.

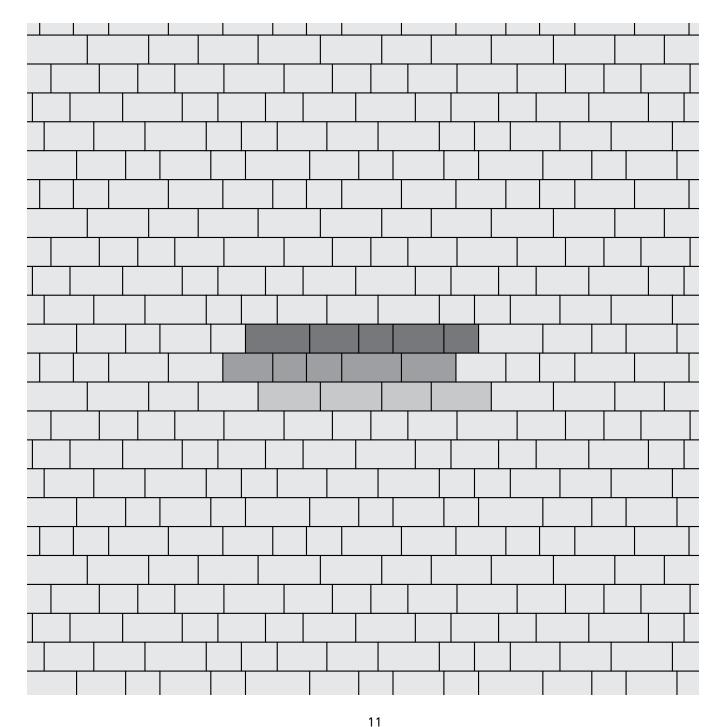

DIMENSIONS[™] 6 & 12





Scan for additional product information

PEDESTRIAN	LIGHT/REGULAI TRAFFIC		IEAVY Raffic	PERME	ABLE	ADA		RAFUSION Rocess	TRUECOLOR Process
Ŕ				C		Ł.	_	\mathbf{S}	Ô
	✓*					\checkmark		✓**	✓**
	*Only applicable for	Dimensio	ns6 and acce	ents.		**Durafusio	n and Truecol	or process varies	s by product color.
			S	HAPES	& SIZES	5			
Dimensions 6	- 3-Piece					_			
	۲								
3 x 6 x 23⁄8	6 x 6 x 1	2¾	6 x	9 x 2³⁄8					
Dimensions 1	2 - 3-Piece					_			
6 x 12 x 2¾	12 x 12	x 2¾	12	x 18 x 2 ³	8/8				
					1			1	
UNIT	SQFT/ Pallet	SQFT/ Layer	LAYER/ Pallet	UNITS/ Pallet	UNITS/ Layer	UNITS/ SQFT	WEIGHT/ Pallet	LNFT/PALLET (SOLDIER)	LNFT/PALLET (SAILOR)
			DIME	NSIONS	6 - 3-P	IECE			
3 X 6 X 2¾ 6 X 6 X 2¾ 6 X 9 X 2¾	ía 120	12	10	480	48	-	3325	160	240
			DIMEN	ISIONS	12 - 3-6	PIECE			
6 X 12 X 23 12 X 12 X 2 18 X 12 X 2	³ ⁄ ₈ 120	12	10	120	12	-	3516	-	120

BELGARD.COM | 877-235-4273

DIMENSIONS[™] 3-PIECE III


3-PIECE PATTERN A

NOTES:

AutoCAD® hatch pattern files can be downloaded from belgard.com for use in architectural drawings.

Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

Percentages are based on area by paver.

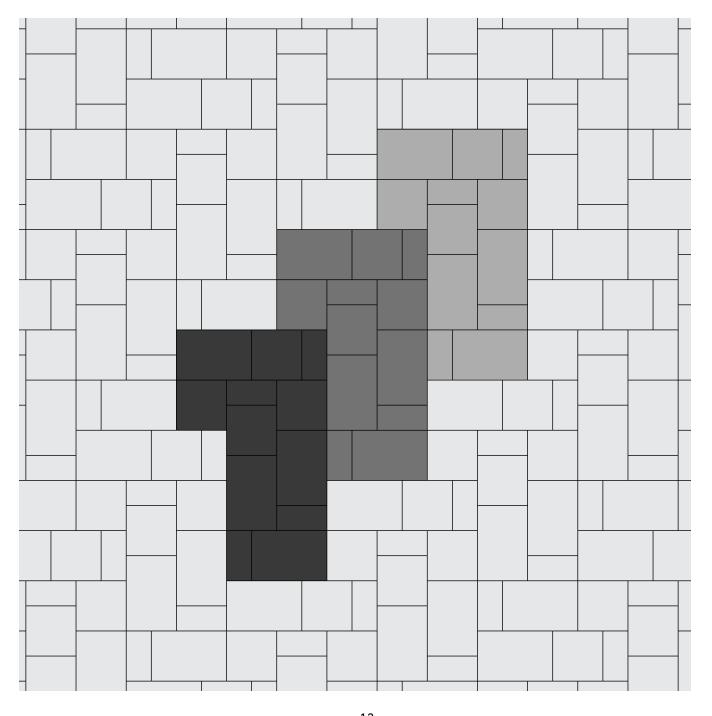

DIMENSIONS[™] 18





Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	DURAFUSION Process	TRUECOLOR Process
ß			0	Ł	Ś	Ô
✓				✓	✓*	✓*

SHAPES & SIZES

*Durafusion and Truecolor process varies by product color.

3-Piece







9 x 18 x 23⁄8

18 x 18 x 2¾

18 x 27 x 2¾

UNIT	SQFT/ Pallet	SQFT/ Layer	LAYER/ Pallet	UNITS/ Pallet	UNITS/ Layer	UNITS/ SQFT	WEIGHT/ Pallet	LNFT/PALLET (SOLDIER)	LNFT/PALLET (Sailor)
	3-PIECE								
9 X 18 X 2¾ 18 X 18 X 2¾ 27 X 18 X 2¾	112.5	11.3	10	50	5	-	3152	-	-

BELGARD[®] | ^{PAVES} DIMENSIONS[™] 18

BELGARD.COM | 877-235-4273


3-PIECE PATTERN A

NOTES:

AutoCAD[®] hatch pattern files can be downloaded from belgard.com for use in architectural drawings.

Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

Percentages are based on area by paver.

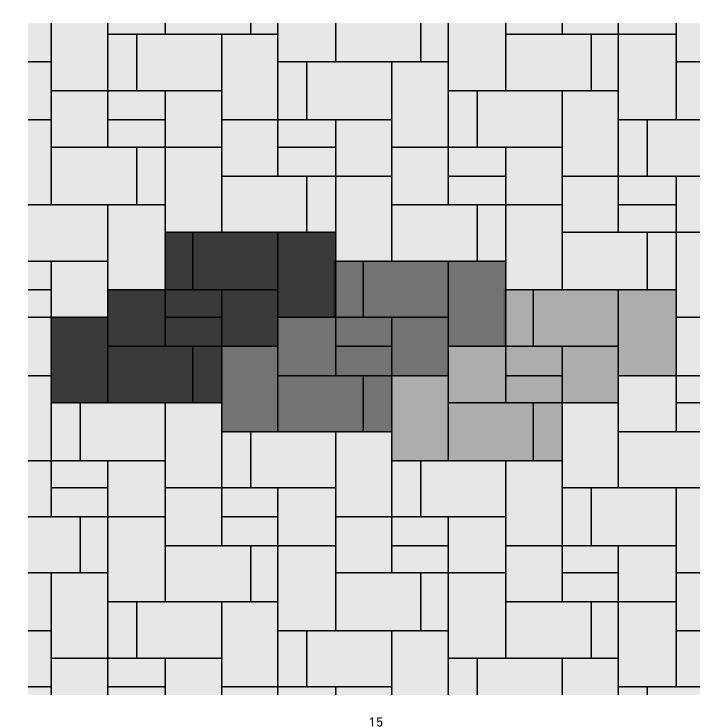

BELGARD[®] | PAVES D

BELGARD.COM | 877-235-4273


DIMENSIONS[™] 18 3-PIECE PATTERN B

NOTES:

AutoCAD® hatch pattern files can be downloaded from belgard.com for use in architectural drawings.

Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

Percentages are based on area by paver.

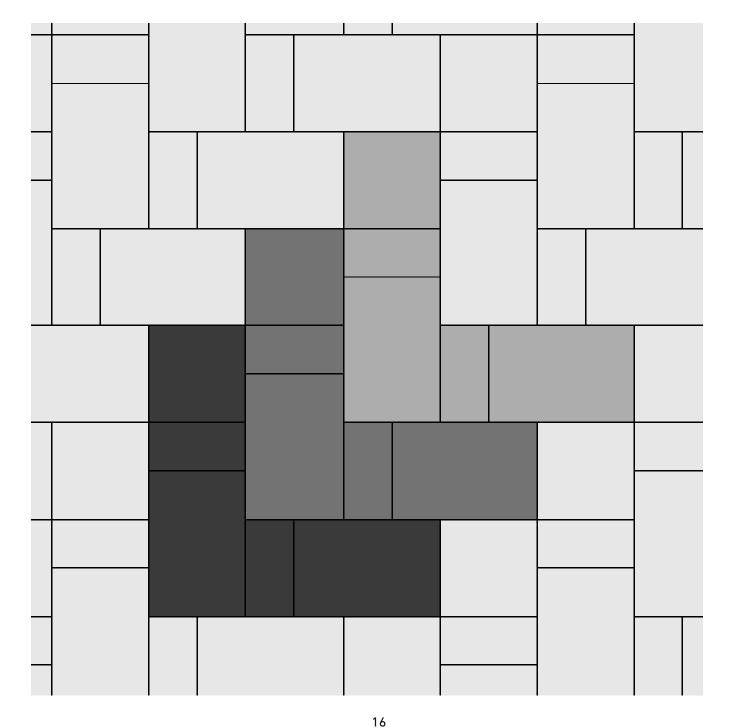

DIMENSIONS[™] SLABS





Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	DURAFUSION Process	TRUECOLOR Process
Ŕ			0	Ł	Ś	Ô
✓				✓	√*	✓*

*Durafusion and Truecolor process varies by product color.

	SHAPES & S	ZES	
Slab 12 x 24	Slab 24 x 24		
12 x 24 x 2³⁄ଃ	24 x 24 x 23⁄8		
Slab 24 x 36	Slab 18 x 36		
24 x 36 x 2³⁄ଃ	18 x 36 x 2⅔		

UNIT	SQFT/ Pallet	SQFT/ Layer	LAYER/ PALLET	UNITS/ Pallet	UNITS/ Layer	UNITS/ SQFT	WEIGHT/ Pallet	LNFT/PALLET (SOLDIER)	LNFT/PALLET (Sailor)	
SLAB 12 X 24										
12 X 24 X 23⁄8	120	12	10	60	6	-	3384	60	120	
SLAB 24 X 24										
24 X 24 X 2¾	80	12	10	20	2	-	2256	40	40	
				SLAB 2	4 X 36					
24 X 36 X 2¾	120	12	10	20	2	-	-	40	120	
	SLAB 18 X 36									
18 X 36 X 2¾	90	9	10	20	-	-	2578.74	-	-	

BELGARD.COM | 877-235-4273

DIMENSIONS[™] SLABS

3-PIECE PATTERN A 12 x 24, 24 x 24, 24 x 36

NOTES:

AutoCAD[®] hatch pattern files can be downloaded from belgard.com for use in architectural drawings.

Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

Percentages are based on area by paver.

BELGARD.COM | 877-235-4273


NOTES:

AutoCAD[®] hatch pattern files can be downloaded from belgard.com for use in architectural drawings

Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

Percentages are based on area by paver.

1-PIECE RUNNING BOND PATTERN




DIMENSIONS[™] SLABS I-I

1-PIECE PATTERNS


18 x 36

1-PIECE HERRINGBONE PATTERN



DIMENSIONS[™] ACCENT & ORIGINS[™] ACCENT



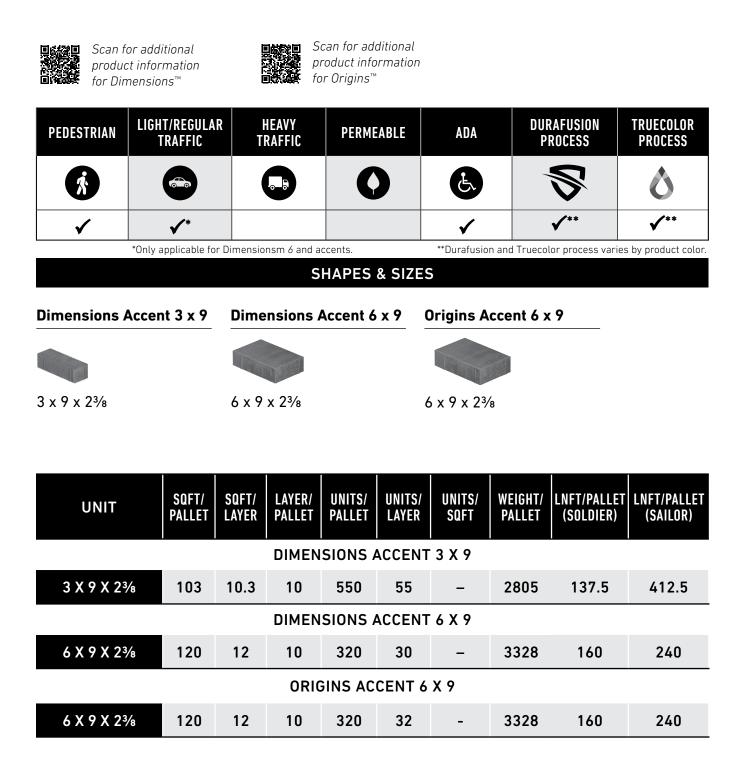

DUBLIN COBBLE®





Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	DURAFUSION Process
Ŕ			0	E	Ś
✓	✓	✓			

SHAPES & SIZES

3-Piece Modular







 $3 \times 6 \times 2^{3/8}$

6 x 6 x 23⁄8

UNIT	SQFT/ Pallet	SQFT/ Layer	LAYER/ Pallet	UNITS/ Pallet	UNITS/ Layer	UNITS/ SQFT	WEIGHT/ Pallet	LNFT/PALLET (SOLDIER)	LNFT/PALLET (SAILOR)	
3-PIECE										
6 X 3 X 2¾	20.84	1.89	-	176	-	-	-	-	-	
6 X 6 X 2¾	44.98	3.91	-	176	-	-	-	-	-	
6 X 9 X 2¾	64.20	5.84	-	176	-	-	-	-	-	
TOTAL	128	11.63	11	528	48	-	3200	170	256	

DUBLIN COBBLE®


BELGARD.COM | 877-235-4273

NOTES:

AutoCAD® hatch pattern files can be downloaded from belgard.com for use in architectural drawings.


Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

3-PIECE PATTERN A



17% - 6 x 3 | 33% - 6 x 6 | 50% - 6 x 9

3-PIECE Running Bond



GEOMETRIC SHAPES





Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	DURAFUSION Process	TRUECOLOR Process
ß			0	Ŀ.	Ś	Ô
✓	✓			\checkmark		✓

	SHAPE	S & SIZES	
Hexagon	Diamond	3 x 12 Paralellogram	6 x 18 Paralellogram
107⁄16 x 117⁄8 x 23⁄8	12 x 12 x 23⁄8	3 x 12 x 2³∕ଃ	6 x 18 x 2³⁄ଃ
6" at 60° at 60° at 10%6" across flats	12" at 60° <u>12"</u> at 60° <u>12"</u> across flats	$3^{\circ} \underbrace{12^{\circ}}_{13\%^{\circ}} \underbrace{13\%^{\circ}}_{13\%^{\circ}} = 25\%^{\circ}$	$ \begin{array}{c} $

UNIT	SQFT/ Pallet	SQFT/ Layer	LAYER/ Pallet	UNITS/ Pallet	UNITS/ Layer	UNITS/ SQFT	WEIGHT/ Pallet	LNFT/PALLET (Soldier)	LNFT/PALLET (SAILOR)	
HEXAGON										
10‰ X 11‰ X 2¾	100.02	-	11	154	-	-	2845	-	-	
DIAMOND										
12 X 12 X 23⁄8	93.53	-	12	108	-	-	2664	-	-	
			3 X 12	PARAL	ELLOGR	AM				
3 X 12 X 2¾	85.73	_	11	396	-	-	2390	-	-	
	6 X 18 PARALELLOGRAM									
6 X 18 X 2¾	114.31	-	11	176	-	-	3165	-	-	


BELGARD.COM | 877-235-4273

GEOMETRIC SHAPES

NOTES:

AutoCAD® hatch pattern files can be downloaded from belgard.com for use in architectural drawings.

Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

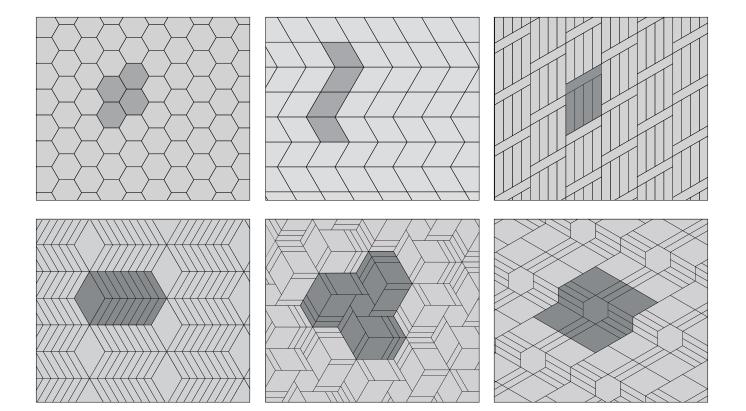

HOLLAND STONE





Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	TRUECOLOR Process
ß			0	E	Ô
✓	✓			✓	✓

	SHAPES & SIZES									
60mm	80mm*									
4 x 8 x 2³⁄ଃ	4 x 8 x 3½ *Special Order Only									
UNIT		LAYER/ UNITS/ Pallet Pallet	UNITS/ UNITS/ Layer SQFT	WEIGHT/ Pallet	LNFT/PALLET (Soldier) (Sailor)					

								(00101111)	(0/112011)	
60mm										
4 X 8 X 2¾	120	12	10	540	54	-	3348	177.2	360	
80mm*										
4 X 8 X 31⁄8	96	17.50	6	432	81	-	3440	-	-	

BELGARD.COM | 877-235-4273

HOLLAND STONE 1-PIECE RUNNING BOND PATTERN


NOTES:

AutoCAD[®] hatch pattern files can be downloaded from belgard.com for use in architectural drawings.


Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

Percentages are based on area by paver.


1-PIECE RUNNING BOND PATTERN



1-PIECE BASKET WEAVE PATTERN



1-PIECE HERRINGBONE PATTERN









Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	TRUECOLOR Process
§			0	Ł	Ô
✓					✓

SHAPES & SIZES

60mm



153⁄8 x 21 x 23⁄8

UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ LAYER	UNITS/ SQFT	WEIGHT/ PALLET	
60mm								
15¾ X 21 X 2⅔	103.4	8.62	12	72	6	-	2896	

BELGARD.COM | 877-235-4273

NOTES:


AutoCAD[®] hatch pattern files can be downloaded from belgard.com for use in architectural drawings.

Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

Percentages are based on area by paver.



100% 15% x 21

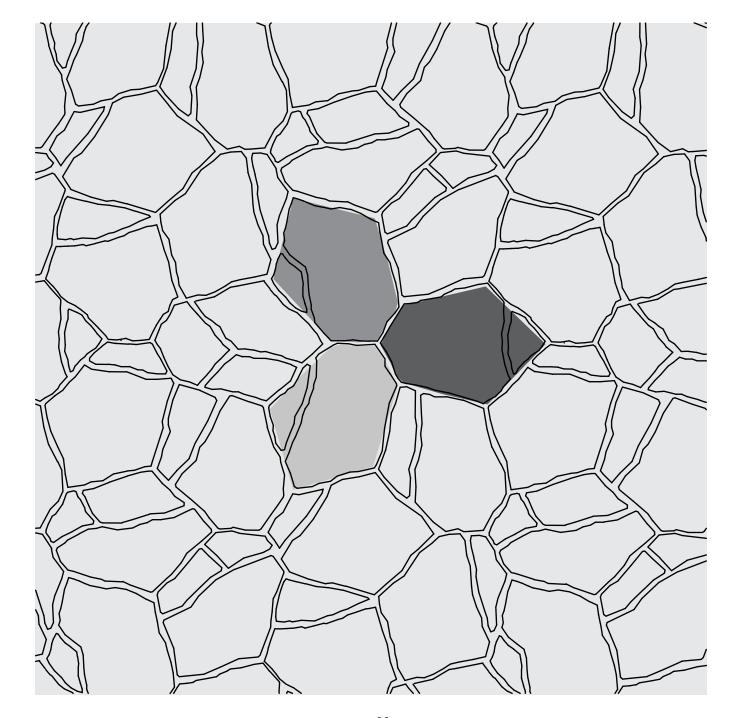

MELVILLE[™] PLANK





Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	DURAFUSION PROCESS
ß			0	E	Ś
✓				✓	✓

SHAPES & SIZES

3-Piece







7¹/₂ x 11¹³/₁₆ x 2³/₈ 7¹/₂ x 15³/₄ x 2³/₈ 7¹/₂ x 19¹¹/₁₆ x 2³/₈

UNIT	SQFT/ Pallet	SQFT/ Layer	LAYER/ PALLET	UNITS/ Pallet	UNITS/ Layer	UNITS/ SQFT	WEIGHT/ Pallet	LNFT/PALLET (SOLDIER)	LNFT/PALLET (SAILOR)
			3	-PIECE	LARGE				
7½ X 11 ¹³ /16 X 2¾	30.67	3.07	-	-	-	-	-	-	-
7½ X 15¾ X 2¾	40.9	4.09	-	-	-	-	-	-	-
7½ X 19 ^{11/} 16 X 2 ³ /8	51.13	5.11	-	-	-	-	-	-	-
TOTAL	122.7	12.27	10	150	-	-	3500	-	275

BELGARD.COM | 877-235-4273

NOTES:

AutoCAD[®] hatch pattern files can be downloaded from belgard.com for use in architectural drawings.


Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

Percentages are based on area by paver.

MELVILLE[™] PLANK

3-PIECE 71/2" PATTERN

25% 7½ x 11¹³/16 33% 7½ x 15³⁄4 42% 7½ x 19¹¹/16

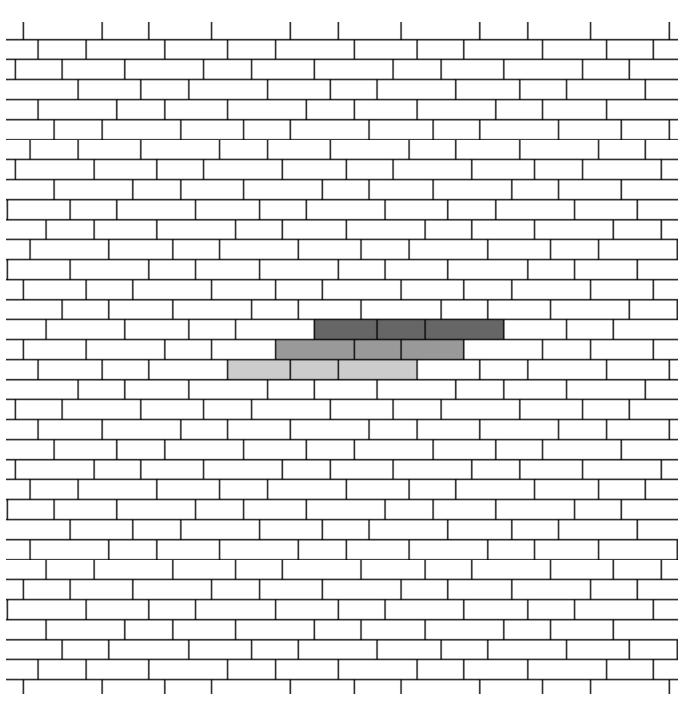

30 BELGARD* RESOURCE GUIDE | BELGARD.COM | 877-235-4273

MELVILLE[™] SLAB	*
----------------------------------	---

*Special Order Only





Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	DURAFUSION Process
Ŕ			0	E	Ś
✓	1				✓

		SHAPES & SIZE	S
3-Piece Combo	80mm		Accent Piece
15 x 7½ x 3½	15 x 15¾ x 31⁄8	15 x 22½ x 3½	15 x 7½ x 31⁄8

UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ LAYER	UNITS/ SQFT	WEIGHT/ PALLET		
3-PIECE COMBO 80mm									
3-PIECE COMBO	83.97	11.99	7	56	-	-	3079		
TOTAL	83.97	11.99	7	56	-	-	3079		
ACCENT PIECE									
15 X 7½ X 3½	79.66	11.75	7	105	-	-	2924		

BELGARD.COM | 877-235-4273

MELVILLE[™] SLAB




3-PIECE COMBO Pattern A

NOTES:

AutoCAD[®] hatch pattern files can be downloaded from belgard.com for use in architectural drawings.

Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

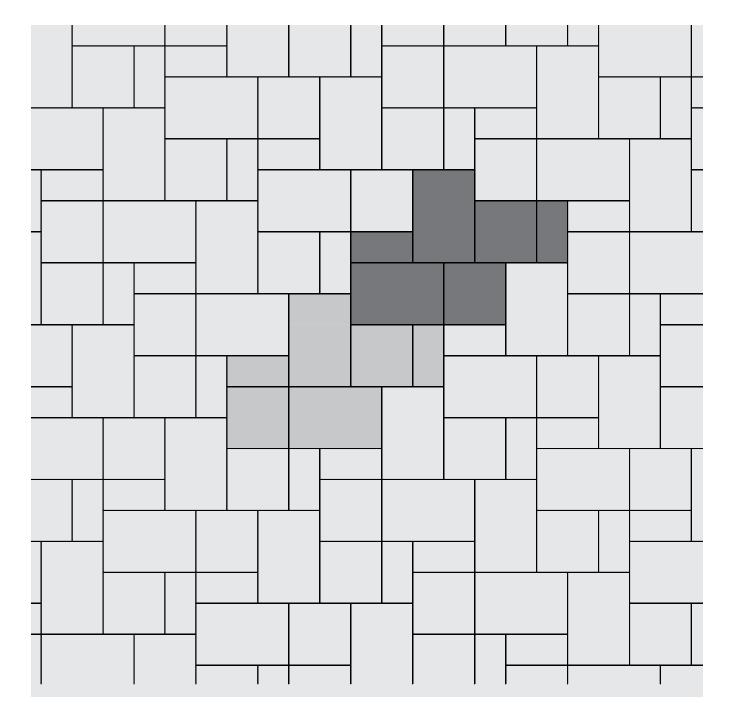

ORIGINS[™] 6 & 12





Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	DURAFUSION Process	TRUECOLOR Process
Ŕ			0	Ł	Ś	0
✓	✓*			✓	√ **	✓**
	*Only applicable for Orio	ins 6 and accents.	**Durafusion a	and Truecolor process va	ries by product color.	

SHAPES & SIZES

Origins 6 - 3-Piece





6 x 9 x 2³/₈

3 x 6 x 2³/₈ 6 x 6 x 2³/₈

Origins 12 - 3-Piece





12 x 12 x 2³/₈ 12 x 18 x 2³/₈

UNIT	SQFT/ Pallet	SQFT/ Layer	LAYER/ Pallet	UNITS/ Pallet	UNITS/ Layer	UNITS/ SQFT	WEIGHT/ Pallet	LNFT/PALLET (SOLDIER)	LNFT/PALLET (SAILOR)
	ORIGINS 6 - 3-PIECE								
3 X 6 X 2¾ 6 X 6 X 2¾ 6 X 9 X 2¾	120	12	10	480	48	-	3325	160	240
ORIGINS 12 - 3-PIECE									
6 X 12 X 2¾ 12 X 12 X 2⅔ 18 X 12 X 2⅔	120	12	10	120	12	-	3516	-	120

BELGARD[®] | ^{PAVES} ORIGINS[™] 3-PIECE

BELGARD.COM | 877-235-4273


3-PIECE PATTERN A

NOTES:

AutoCAD[®] hatch pattern files can be downloaded from belgard.com for use in architectural drawings.

Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

Percentages are based on area by paver.

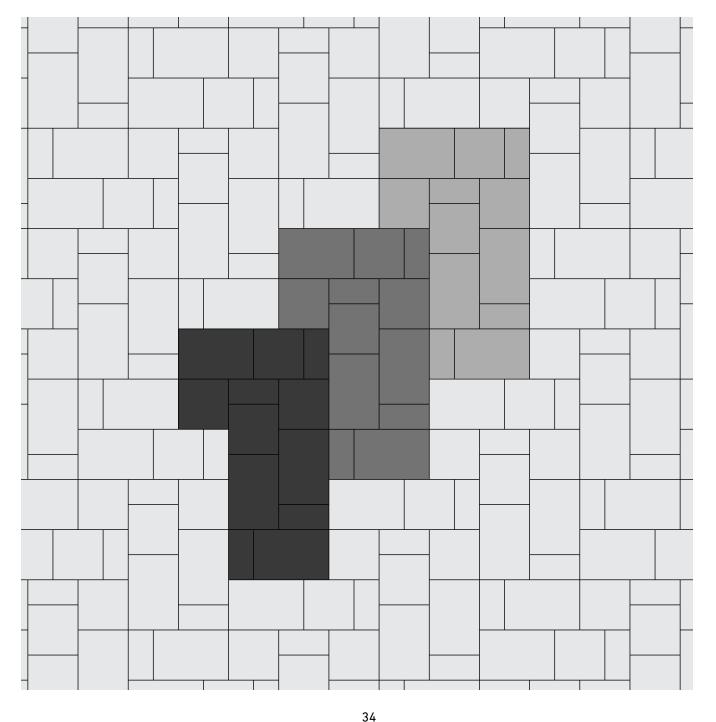







Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	DURAFUSION Process	TRUECOLOR Process
Ŕ			0	Ŀ.	\$	0
✓				✓	✓*	✓*


*Durafusion and Truecolor process varies by product color.

SHAPES & SIZES

3-Piece







9 x 18 x 23⁄8

18 x 18 x 23⁄8

UNIT	SQFT/ Pallet	SQFT/ Layer	LAYER/ Pallet	UNITS/ Pallet	UNITS/ Layer	UNITS/ SQFT	WEIGHT/ Pallet	LNFT/PALLET (SOLDIER)	LNFT/PALLET (SAILOR)
3-PIECE									
9 X 18 X 2¾ 18 X 18 X 2¾ 27 X 18 X 2¾	112.5	11.3	10	50	5	-	3152	-	-

BELGARD.COM | 877-235-4273




NOTES:

AutoCAD[®] hatch pattern files can be downloaded from belgard.com for use in architectural drawings.

Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

Percentages are based on area by paver.

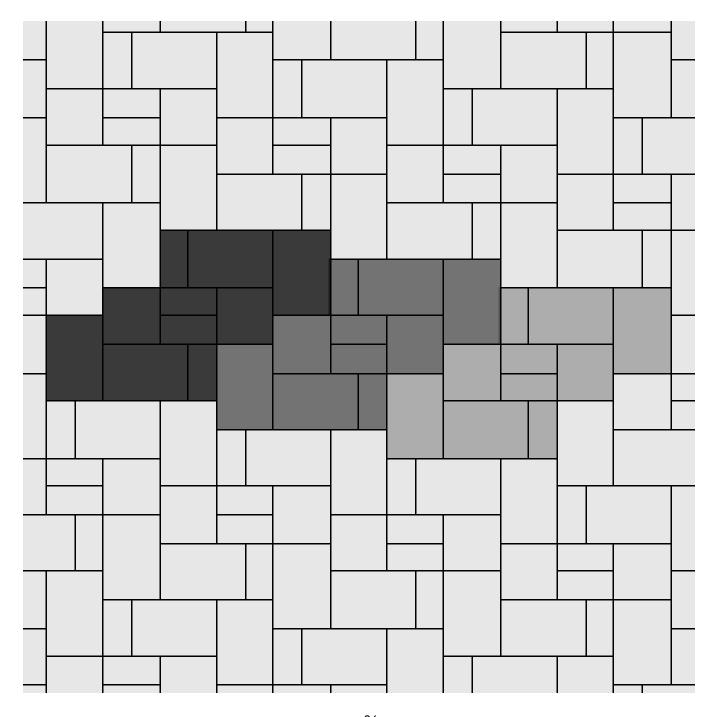

BELGARD[®] | PAVES THE WAY[®]

BELGARD.COM | 877-235-4273




NOTES:

AutoCAD[®] hatch pattern files can be downloaded from belgard.com for use in architectural drawings.

Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

Percentages are based on area by paver.

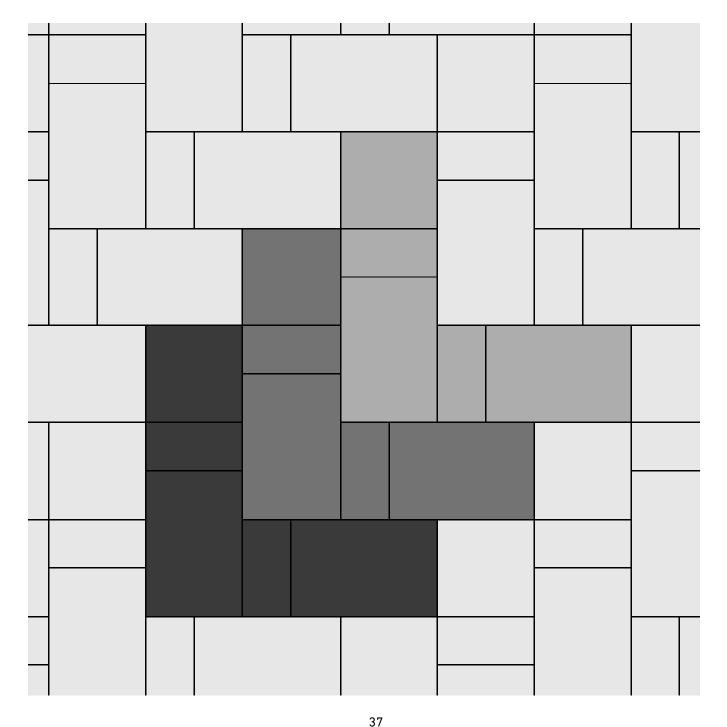

PERMEABLE PAVERS

PERMEABLE PAVER INSTALLATION GUIDE

39 Basic PICP Systems


PERMEABLE PAVERS


40 Aqua Roc[™]I & II

- 43 Turfstone
- 45 Urbana[®] Stone

For basic paver installation information visit icpi.org

PERMEABLE INTERLOCKING CONCRETE PAVEMENT (PICP)

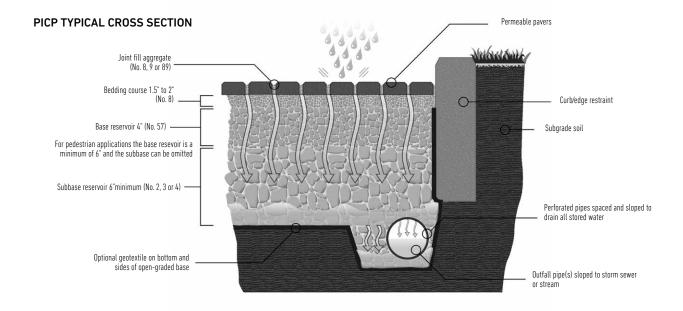

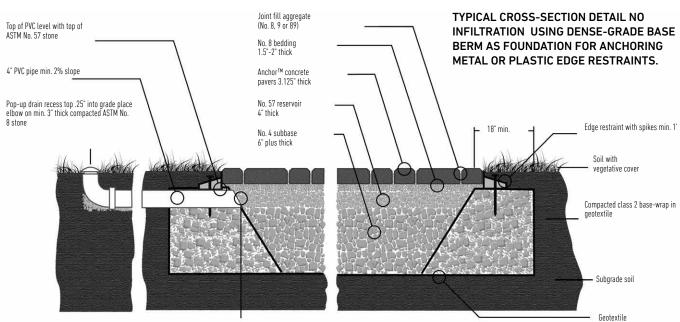

Cover pipe opening and fasten 16 mesh fiberglass screen







4¹/₂ x 9 x 3¹/₈

 $4 \times 8 \times 3^{1/8}$

Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	TEXTUREGUARD Process	TRUECOLOR Process
Ŕ			0	Ł	\bigcirc	0
✓	✓	✓	✓	✓		✓

		SHAPES & SIZES	
Aqua Roc I	Aqua Roc II*		*Available for Mechanical Installation

UNIT	SQFT/ Pallet	SQFT/ Layer	LAYER/ PALLET	UNITS/ Pallet	UNITS/ Layer	UNITS/ SQFT	WEIGHT/ Pallet	LNFT/PALLET (Soldier)	LNFT/PALLET (SAILOR)
				Aqua F	Roc I				
4½ X 9 X 31⁄8	90	11.25	8	320	40	-	2880	120	240
				Aqua R	oc ll*				
4 X 8 X 31⁄8	92	10	-	-	-	-	2944	-	-

BELGARD[®] | PAVES THE WAY[®]


BELGARD.COM | 877-235-4273


AQUA ROC™I & II*

NOTES:

AutoCAD® hatch pattern files can be downloaded from belgard.com for use in architectural drawings.

Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design. SINGLE PIECE Herringbone



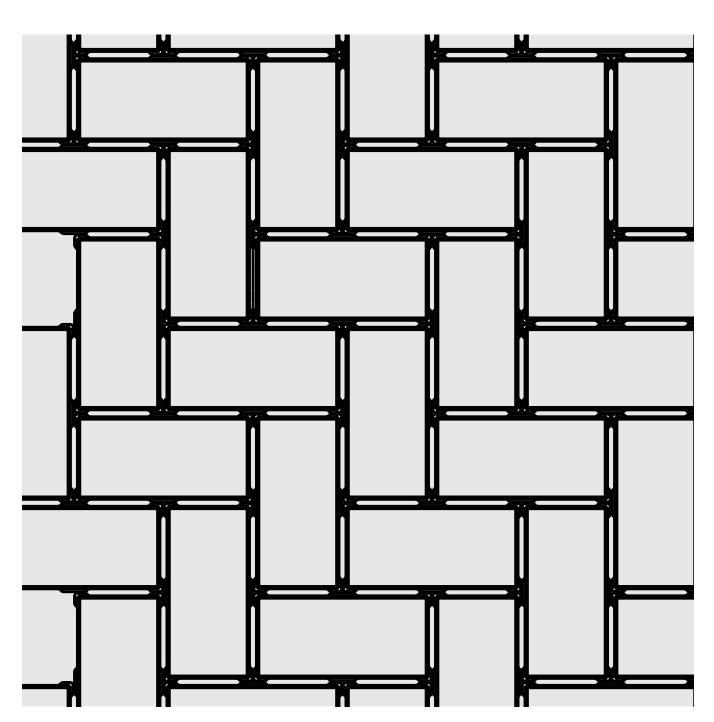

BELGARD[®] | PAVES THE WAY[®]


BELGARD.COM | 877-235-4273

NOTES:


AutoCAD[®] hatch pattern files can be downloaded from belgard.com for use in architectural drawings.

Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

1-PIECE RUNNING BOND PATTERN




1-PIECE BASKET WEAVE PATTERN



1-PIECE HERRINGBONE PATTERN

AQUA ROC[™] | & ||









Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	DURAFUSION PROCESS
Ŕ			0	E	Š
✓	✓		✓		

SHAPES & SIZES

80mm



15¾ x 235⁄8 x 31⁄8

UNIT	SQFT/ Pallet	SQFT/ Layer	LAYER/ PALLET	UNITS/ Pallet	UNITS/ Layer		WEIGHT/ Pallet	LNFT/PALLET (SOLDIER)	LNFT/PALLET (SAILOR)
	80MM								
15¾ X 235⁄8 X 31⁄8	103.2	12.9	8	40	5	2.58	2377	52.5	78.75

BELGARD[®] | PAVES THE WAY[®]

BELGARD.COM | 877-235-4273

NOTES:


AutoCAD® hatch pattern files can be downloaded from belgard.com for use in architectural drawings

Some patterns may not necessarily reflect the percentages of stone sizes within a particular pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

TURFSTONE™

1-PIECE Staggered Bond Pattern

100% 153/4 x 235/8 Units

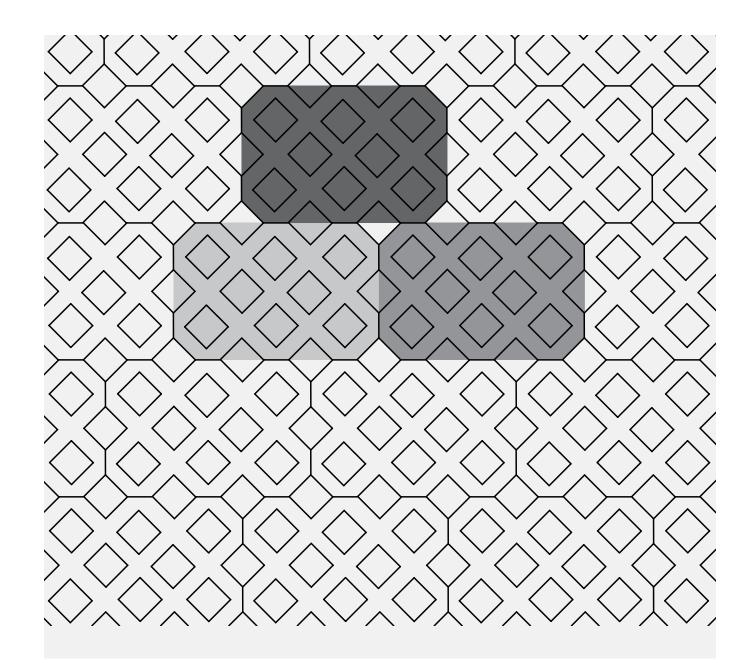

URBANA® STONE





Scan for additional product information

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA	TRUECOLOR Process
Ŕ		•••	0	E	Ô
✓	✓		✓		✓

SHAPES & SIZES

3-piece Modular 60mm







UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ LAYER	UNITS/ SQFT	WEIGHT/ PALLET
		3-PIECE	E MODULA	R 60mm			
8 X 4 X 2¾							
8 X 8 X 2¾	116.4	11.625	10	216	-	-	3419
8 X 12 X 2¾							

BELGARD[®] | PAVES THE WAY[®]

BELGARD.COM | 877-235-4273

AutoCAD[®] hatch pattern files can be downloaded from belgard.com for use in

Some patterns may not necessarily reflect the percentages of stone sizes within a particular

architectural drawings

NOTES:

URBANA[®] STONE 3-PIECE MODULAR Pattern A

pallet. In some cases you may have extras in one or more of the sizes. This must be accounted for in your planning and design.

46 BELGARD* RESOURCE GUIDE | BELGARD.COM | 877-235-4273

PORCELAIN PAVERS & PLANKS

PORCELAIN INSTALLATION GUIDE

- 48 Porcelain Paver Advantages
- 48 Specialty Tools for Porcelain Pavers Construction
- 49 Cleaning & Maintenance For Porcelain Products
- 49 Porcelain Paver Installation
- 50 Sand Set over Compacted Road Base Installation (Pedestrian Foot Traffic)
- 50 Sand Set over Concrete Overlay Installation (Pedestrian Foot Traffic)
- 51 Gravel Set over Open Graded Aggregate Installation
- 52 Cementitious Adhesive Overlay, Concrete Base Installation (Light Vehicular Traffic)

PORCELAIN PAVERS & PLANKS

53	Foundation [™]	57	Quarziti 2.0
54	Genoa™	58	Unico Coping
55	Glocal	59	Verona™

56 Noon

For basic paver installation information visit icpi.org

PORCELAIN PAVERS

Belgard Porcelain Pavers are formed by pressing, followed by vitrification: this process involves the total fusion into a single material made from natural raw materials (sand, quartz, feldspars, kaolin, clays and inorganic pigments) which, fired at temperatures above 1226.67° C (2240° F), are transformed into a product with exceptional hardness, ultra-low absorption rate and unmatchable mechanical characteristics. Belgard porcelain pavers are eco-compatible and ecolabel-certified. Each unit is 20mm (0.7874") standard thickness or 34" nominal thickness and is durable enough to withstand use in exterior applications.

PORCELAIN PAVERS ADVANTAGES:

- Freeze thaw resistant—They are 100% frost-free and their properties remain unaltered at temperatures ranging from -51.1° to + 60° C (-60° F to +140°F).
- **Color durability**—Color is fused by vitrification, becomes an integral part of the porcelain surface and is not affected by elements.
- Easy installation—Perfect fit and for fast installs.
- Low absorption rate—Spills, salt and other materials will not seep into pours.
- Easy to clean—Household cleaners can be used to wipe down spills and dirt; can even be pressure washed with a low pressure washing device* (see pressure washing warning below).*
- Stylish—Matches what homeowners are currently doing inside the home.
- **Durable**—High breakage loads of up to 3,587 lbs (1,627 kg) per foot based on ASTM-C648.
- Resistant— High compressive strength and ultra-low

- absorption rate creates a dense surface that resists mold, moss, dirt and other staining.
- Skid-resistant—Structured paver top textures create slip resistant surfaces for safety; perfect for around pools/spas or in wet climates.
- Modular Design—Superior accuracy in dimensional sizing and linear sides, the slabs allow for perfectly executed installations with tight and accurate lines.
- Light weight—16.8 kg (37 lbs) for the 24"x24" paver permit for easy installation, removal and serviceability and even reusability (Excluding adhered installations).
- Available in colors that have an SRI that qualifies for a LEED certification. The SRI on some units ranges between 60-80. To receive LEED credit, the SRI must be at least 29.
- Impermeable— Deicing salt and other deicing materials can be used without concern of damage.
- * It is important that all pressure washing of your porcelain pavers be done with a low pressure washer with a maximum of 1600 psi and nothing more powerful. When pressure washing your installation, care should be taken to prevent damage to the grout (adhesive and grout installations) and some re-sanding will be necessary when power washing an installation with sand or polymeric sand joints.

SPECIALTY TOOLS FOR PORCELAIN PAVER CONSTRUCTION:

- Wet cut tile saw equipped with a diamond blade manufactured for wet cutting porcelain.
 The saw should be designed to safely cut a 24 inch length porcelain paver.
- A paver clamp for easy handling, which can be used to both install and remove pavers.
- The use of gloves is highly recommended while handling and installing porcelain slabs.
- Appropriate notched trowels and grout float tools for cementitious adhesive and grout installation. The appropriate tool selection would be based on the adhesive and grout manufacturer's recommendation
- Pallets of porcelain pavers are manufactured and shipped with a Heavy Duty plastic protective pallet cover and the individual porcelain pavers are packaged in protective card board boxes. To prevent damage to your pavers, do not remove the protective card board boxes until you are ready to install them.
- Caution: Removing pavers from their protective packaging and handling multiple loose stones together creates the possibility for chipping.

Once the Heavy Duty plastic pallet covers have been removed from the pallet, the unused boxed pavers should be protected from the elements to insure the integrity of the protective cardboard boxes.

CLEANING & MAINTENANCE FOR PORCELAIN PRODUCTS

Post-laying cleaning is obligatory after on site works. Inadequate or late removal of the grouting used on the joints can leave marks difficult to remove and create, on the flooring, a cement film able to absorb all types of dirt, thus giving the impression that it is the material that has become dirty.

It is indispensable to dissolve and remove these residues completely using buffered acids diluted in water (follow the instructions on the packs of the products used), which must then be removed completely and quickly, rinsing the floor with plenty of water to avoid residues or drops on the floor which could damage the tiles.

Allow the product to act on the wet floor, without letting it dry and rubbing it with colorless rags. Next, rinse it thoroughly with water to ensure that the floor is free of detergent residues. If necessary, repeat the operation.

We suggest performing a preliminary wash on a sample surface of a few square meters; if the test is successful, extend clearing over the entire surface. When you have done the above wash, carry out a basic or alkaline wash using degreasing detergents. This is because acid can leave grease on the floor, which could contribute to retaining dirt.


PORCELAIN PAVER INSTALLATION

Each of the following option details will include specific information relative to the selected installation. Base thicknesses vary between different geographical and climatic locations and the contractor will be installing typical base thicknesses for paving installations in their location.


Installing porcelain pavers requires the bedding course sand to be pre-compacted and then struck off with a screed to the required thickness as shown in the detail drawings. The porcelain pavers are not compacted and therefore the sand layer beneath them requires pre-compaction. Do not compact dry sand, but insure the sand has a 5 to 6% moisture content so that it will compact cohesively and allow for a smooth strike off finish.

INSTALLATION INFORMATION THAT MUST BE FOLLOWED :


- Weather, soil type and job conditions should be considered when choosing the best installation method.
- When installing porcelain planks (12 x 48, 8 x 48) always lay the pattern of the $\frac{1}{3}$ s. These should not be placed next to each other at 50%
- NEVER compact porcelain pavers with a plate compactor. Roller compactor recommended for all compaction with porcelain products
- ALWAYS pre-compact and strike off your sand leveling course before installing your porcelain pavers in sand set installations.
- A proper surface drainage system is required to mitigate standing water. Please consider that Belgard Porcelain Paves are impervious, therefore water must be properly discharged and drained away from the pavement.
- Porcelain pavers should only be wet cut with a tile saw equipped with a wet cut porcelain blade.
- NEVER install porcelain pavers without the required 4mm spacing between them. The porcelain pavers should never be installed with a porcelain to porcelain contact. Plastic 4mm spacers (shown at right) should be used on Sand Set and Permeable installations. The photo on the left illustrates the spacer installed in a perspective to support and space 4 paver corners and the photo on the right illustrates the installed spacer snapped apart (as designed) to form Space T that supports 2 paver corners. This versatility will permit your porcelain pavers to be installed in a stack bond pattern, a running bond patterns as well as a flush installation against another structure.
- For a 100 sf. project, approximately 34 spacers are needed; this allows for overages if needed.



4mm spacers



SAND SET OVER COMPACTED ROAD BASE INSTALLATION (PEDESTRIAN FOOT TRAFFIC)

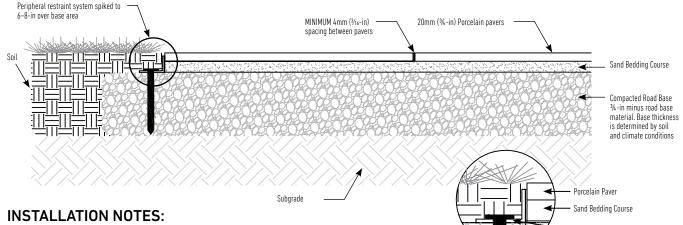


1.5-in tall peripheral restraint system

spiked into 6-8-in over base area

- Weather, soil type and job conditions should be considered when choosing the best installation method.
- Follow the detailed drawing above
- Base material is to be over based 6 to 8 inches beyond the edge of the pavement.
- Precompact the sand bedding course and screed to 1-in thickness with smooth surface
- The required edge restraint system is a low profile edge restraint with a vertical height of 1½-in as shown in the drawing.
- Insure that pavement is constructed with a 1 ½ to 2% slope that it is pitched away from any building.
- Insure the plastic 4mm spacers are installed at all corners of the installed pavers


SAND SET OVER CONCRETE OVERLAY INSTALLATION (PEDESTRIAN FOOT TRAFFIC)

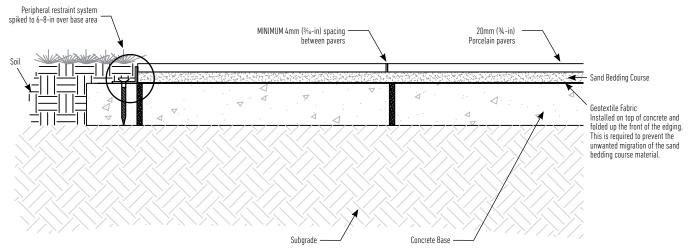

INSTALLATION NOTES:

- Weather, soil type and job conditions should be considered when choosing the best installation method.
- A concrete curve with a full depth and finished height is needed to ensure full containment of the bedding sand and the Belgard Porcelain Pavers.
- Precompact the sand bedding course and screed to 1-in thickness with smooth surface
- Mechanically anchor edge restraint into the concrete base.
- Insure geotextile is installed directly on top of the concrete to contain the bedding sand.
- Insure that pavement is constructed with a 1½ to 2 percent slope and that it is pitched away from any building.
- Insure the plastic 4mm spacers are installed at all corners of the installed pavers.


GRAVEL SET OVER OPEN GRADED AGGREGATE INSTALLATION

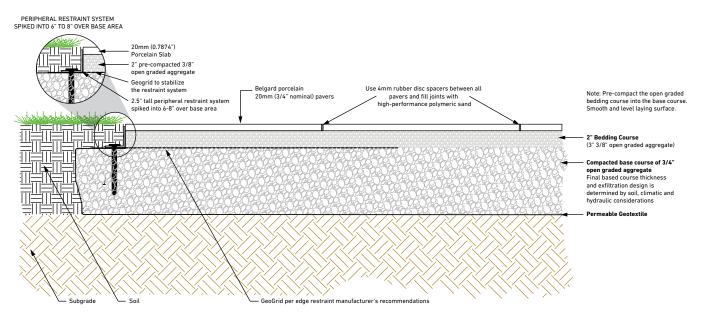

INSTALLATION NOTES:

- Weather, soil type and job conditions should be considered when choosing the best installation method. Follow the detail drawing.
- The required edge restraint system for this installation has a vertical height of 2½ inches as shown in the drawing. Follow the edge restraint manufacturer's recommendations for the use of their product in permeable applications regarding geogrid usage and placement to maintain the performance of there edging.
- Ensure that pavement is constructed with a 2% slope and that it is pitched away from any building.
- Ensure the 4mm spacers are installed between all pavers.
- The open-graded aggregate should be clean and free from foreign matter, manufactured from crushed rock and conform to ASTM C33 size No. 57. Do not use recycled aggregates or rounded river gravel.
- Additional Drainage: If the project has fine-grained soils, silts or clays, and contributing water sources such as downspouts or groundwater, it is important to install a perforated pipe underdrain to prevent saturation of the subgrade. Make sure underdrain has an acceptable discharge location.
- When installing porcelain planks (12 x 48 & 8 x 48), always lay the pattern of 1/3's. These should not be placed next to each other at 50%.
- compaction
- Roller Compactor recommended for all compaction with Porcelain products

CEMENTITIOUS ADHESIVE OVERLAY, CONCRETE BASE INSTALLATION (LIGHT VEHICULAR TRAFFIC)

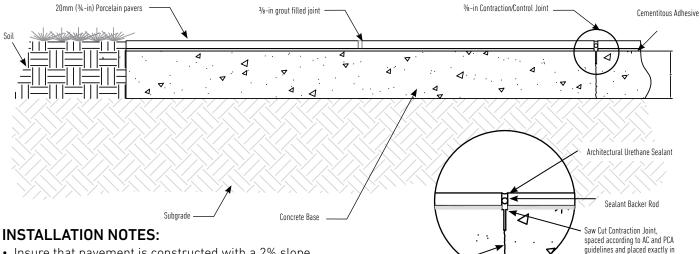

- Insure that pavement is constructed with a 2% slope and that it is pitched away from any building.
- For Cementitious adhesive and grout installation, refer to the
- manufacturer's technical instructions and specifically as they relate to outdoor installations.
- For concrete foundation slabs that are not large enough to require contraction / control joints, a minimum 4mm (¼" to ¾ιδ") grout joint is acceptable, but for larger concrete foundation slabs that do require contraction / control joints, the joint width should be a ¾". It is absolutely imperative that all contraction / control joints be located in the joint line of installed porcelain pavers and not beneath a paver.

Induced crack beneath Saw

Cut Contraction Joint

the center of the slab joint. The depth of the Saw Cut must be a

minimum of ¼ of the thickness

of the concrete slab.

• Caution: If a Porcelain Paver is installed over a control joint, the paver will reflectively crack along the contraction / control joint beneath it.







Scan for additional product information



Spacers are recommended for all porcelain paver installations.

PLEASE NOTE: For vehicular applications, must be a mortar install over a concrete slab. Please refer to the Porcelain install guide for driveway install procedure.

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA
ß	A		0	E
✓				✓

SHAPES & SIZES

24 x 24



23.54 x 23.54 x ³⁄₄

UNIT	GROSS WEIGHT/ BOX	PIECES/ BOX	SQFT/ BOX	BOXES/ PALLET	SQFT/ PALLET	GROSS WEIGHT/ PALLET		
	24 X 24							
23.54 X 23.54 X ¾	67.84	2	7.64	36	275.04	2533.80		







Scan for additional product information



Spacers are recommended for all porcelain paver installations.

) PLEASE NOTE: For vehicular applications, must be a mortar install over a concrete slab. Please refer to the Porcelain install guide for driveway install procedure.

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA
ß			0	G
✓				✓

SHAPES & SIZES



12 x 24



23.54 x 23.54 x ³⁄₄

11.73 x 23.54 x ¾

GROSS GROSS PIECES/ SQFT/ **BOXES**/ SQFT/ UNIT WEIGHT/ WEIGHT/ PALLET BOX BOX PALLET BOX PALLET 24 X 24 23.54 X 23.54 X ¾ 67.84 2 7.64 36 275.04 2533.80 12 X 24 11.73 X 23.54 X ¾ 68.23 4 7.59 40 303.6 2807



GLOCAL



AIRA

Design.Sustaina



Scan for additional product information



47.17 x 47.17

Spacers are recommended for all porcelain paver installations.

PLEASE NOTE: For vehicular applications, must be a mortar install over a concrete slab. Please refer to the Porcelain install guide for driveway install procedure.

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA
ß			0	E
✓				✓

	SHAPES & SIZES							
24 x 24	24 x 48	Unico	*Special Order Only					
23.54 x 23.54 x ¾	23.54 x 47.17 x ¾	12.99 x 23.54 x ¾						
36 x 36*	48 x 48*							

35.35 x 35.35 36 x 36 Not Available in Clear

UNIT	GROSS WEIGHT/ BOX	PIECES/ BOX	SQ FT/ Box	BOXES/ Pallet	SQ FT/ Pallet	GROSS WEIGHT/ PALLET
		2	4 X 24			
23.54 X 23.54 X ¾	72	2	7.75	30	232.5	2160
		2	4 X 48			
23.54 X 47.17 X ¾	74	1	7.75	35	271.25	2621
		ι	JNICO			
12.99 X 23.54 X ¾	52	3	6	40	240	2080
		3	6 X 36			
35.35 X 35.35	-	_	-	-	-	_
		4	8 X 48			
47.17 X 47.17	-	-	-	-	-	-

NOON





Scan for additional product information



Spacers are recommended for all porcelain paver installations.

PLEASE NOTE: For vehicular applications, must be a mortar install over a concrete slab. Please refer to the Porcelain install guide for driveway install procedure.

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA
ß			0	G
✓				✓

SHAPES & SIZES						
8 x 48	12 x 48	Unico				
7.64 x 47.17 x ¾	11.73 x 47.17 x ¾	12.99 x 23.54 x ¾				

UNIT	GROSS WEIGHT/ BOX	PIECES/ BOX	SQFT/ BOX	BOXES/ PALLET	SQFT/ PALLET	GROSS WEIGHT/ PALLET			
8 X 48									
7.64 X 47.17 X ¾	46	2	5.06	30	151.8	1380			
		12	X 48						
11.73 X 47.17 X ¾	74	2	7.75	36	279	2664			
UNICO									
12.99 X 23.54 X ¾	52	3	6	40	240	2080			









Scan for additional product information




Spacers are recommended for all porcelain paver installations.

PLEASE NOTE: For vehicular applications, must be a mortar install over a concrete slab. Please refer to the Porcelain install guide for driveway install procedure.

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA
ß			0	S
✓				✓

SHAPES & SIZES



UNIT	GROSS WEIGHT/ BOX	PIECES/ BOX	SQFT/ BOX	BOXES/ PALLET	SQFT/ PALLET	GROSS WEIGHT/ PALLET			
24 X 24									
23.54 X 23.54 X ¾	72	2	7.75	30	232.5	2160			
24 X 48									
23.54 X 47.17 X ¾	74	1	7.75	35	271.25	2621			



UNICO COPING





Scan for additional product information



Spacers are recommended for all porcelain paver installations.

PLEASE NOTE: For vehicular applications, must be a mortar install over a concrete slab. Please refer to the Porcelain install guide for driveway install procedure.

RESIDENTIAL	COMMERCIAL	STEPS	CAPS	COPING
G			Ð	
✓		✓		✓

SHAPES & SIZES

Unico




12.99 x 23.54 x ³⁄₄

UNIT	GROSS WEIGHT/ BOX	PIECES/ BOX	LN FT/ BOX	BOXES/ PALLET	LN FT/ PALLET	GROSS WEIGHT/ PALLET		
UNICO								
12.99 X 23.54 X ¾	52	3	6	40	240	2080		

Two installation needs, a single solution. UNICO, size 12.99" x 23.51" x 3/4", is processed on both sides, on one side it has a rounded edge and on the other a square edge.

An extremely versatile special piece, which can be used both as a step and as a special piece for swimming pools, with bullnose edge or straight edge, both colored along the side.





VERONA[™]





Scan for additional product information



Spacers are recommended for all porcelain paver installations.

PLEASE NOTE: For vehicular applications, must be a mortar install over a concrete slab. Please refer to the Porcelain install guide for driveway install procedure.

PEDESTRIAN	LIGHT/REGULAR TRAFFIC	HEAVY TRAFFIC	PERMEABLE	ADA
ß			0	G
✓				✓

SHAPES & SIZES 24 x 24 Unico[•] 0 0 23.54 x 23.54 x ³/₄ 12.99 x 23.54 x ³/₄ 'Available in Blue Stone and Platinum Only

UNIT	GROSS WEIGHT/ BOX	PIECES/ BOX	SQFT/ BOX	BOXES/ PALLET	SQFT/ PALLET	GROSS WEIGHT/ PALLET		
24 X 24								
23.54 X 23.54 X ¾	72	2	7.75	30	232.5	2160		

WALLS

WALL INSTALLATION GUIDE

61 Wall Types

63 Before You Begin

WALLS

68

64 Brisa[®] Wall

- 71 Lamina Tandem
- 66 Diamond[®] 9D

Diamond Pro[®] Straight Face

Weston Stone™ 3-Piece & Universal

Melville Tandem[™]

- 69 Melville[™] Wall
- 70 Sterling[®] Wall
- 71 Ashlar Tandem[™]

For basic wall installation information visit ncma.org



NCMA Segmental Retaining Wall Installation Guide



NCMA Segmental Retaining Walls: Residential Applications

71

73


SEGMENTAL RETAINING WALL TYPES

Segmental retaining walls typically fall into one of three categories.

GRAVITY RETAINING WALL

The first category — a gravity wall — is a retaining wall that does not use soil reinforcement. A gravity wall has height limitations specific to each product. An advantage of this type of retaining wall is that it requires a smaller work area behind the wall.


A gravity wall relies on the weight and setback of the block to resist the soil forces being exerted on the wall.




GEOSYNTHETIC-REINFORCED RETAINING WALL

The second category is a geosynthetic-reinforced wall, which needs to be designed by a qualified engineer. There are (theoretically) no height limitations with reinforced retaining walls, and they are used in larger applications. It requires more work area behind the structure.

The block of soil is stabilized by introducing reinforcement layers into the soil mass behind the facing units. The larger the stabilized soil mass, the more soil can be retained or held back. The geogrid in the soil extends past the theoretical failure plane and serves to create a large, rectangular mass of block and soil, restraining the retained soil.

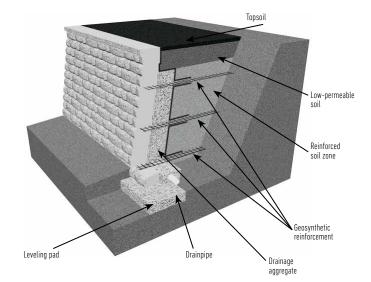



ANCHORPLEX® SYSTEM

The third category is the Anchorplex system, which offers a unique, non-conventional solution to problematic wall construction sites. It is a retaining wall built with Anchor[™] products and structural backfill specified by ANCHOR Diamond, and backed by engineering support tools developed by Anchor.

Use of the Anchorplex system completely eliminates the need for the construction of a mechanically stabilized earth zone behind the wall facing and requires substantially less excavation than is usually necessary in geosynthetic-reinforced wall construction.


Contact ANCHOR Diamond at 1-877-295-5415 for more information about designing and building with the Anchorplex system.


OTHER SEGMENTAL WALL APPLICATIONS

INDEPENDENT TERRACED WALLS

For each wall to be independent of others, they must be built using a 2:1 ratio: The upper wall must be built a distance away from the lower wall of at least twice the height of the lower wall. In addition, the upper wall must also be equal to or less than the height of the lower wall. Exceptions to this general rule include weak soil conditions or where slopes exist above, below or between wall locations. For example, if the lower terrace is 4 feet tall, the distance between the terraces must be at least 8 feet and the upper wall must not be higher than 4 feet.

Proper drainage is vital to maintaining stable, long-lasting terraced walls. A drainpipe must be installed so that the water is directed around or under the lower wall. Never place the drainpipe outlet for the upper wall above or behind the lower wall.

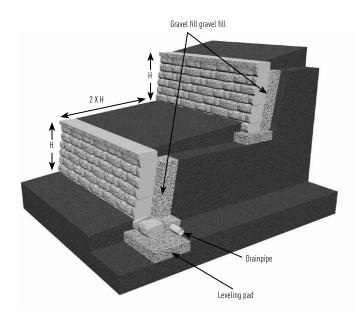

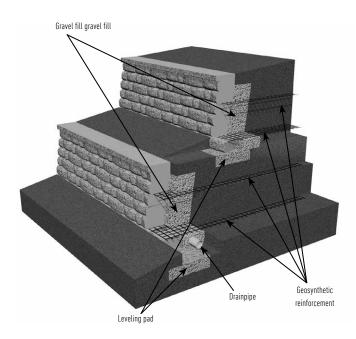

DEPENDENT TERRACED WALLS

When the distance between the lower and upper walls is less than twice the height of the lower wall, the walls become structurally dependent on each other. In this situation, it is important to take global stability into account, incorporating additional reinforcement — and longer layers — into the wall plan. In addition, structurally dependent walls require even more excavation, backfill and time. So plan ahead and be sure to check the wall plan for specific requirements. For structurally dependent walls, consult with a qualified engineer.

BEFORE YOU BEGIN

Advance planning and careful layout at the job site help ensure a successful retaining and freestanding wall project.

- Review the site plan to confirm lot lines, wall location, length and elevations.
- Understand on-site soils. Ideal soils are sand and gravel. For walls built in clay or poor soils, work with a local engineer to confirm the wall design and the required soil reinforcement. Black or organic soils should not be used as backfill.
- Confirm the location of underground utilities. Call 811.
- Seek all necessary building permits.
- Prepare a drawing of the site with the wall location, lengths and elevations.
- Plan drainage to avoid erosion or buildup of water behind the wall. Consider where the water will drain through the wall, where downspouts will expel and whether there's an underground sprinkler. For walls greater than three feet in height, a perforated drainpipe is recommended at the base of the aggregate to quickly remove large amounts of water.
- A best practice is to divert water away from the wall before it has an opportunity to enter the reinforced soil and gravel fill zone.
- Check the block delivered to ensure it is the correct product and color. Check the geogrids to confirm that it's the strength and weight specified in the engineering plans.
- Be sure to use the right tools. Hand tools include a shovel, 4-foot level, dead-blow hammer, 2- or 3-pound hammer, chisel, hand tamper, hydraulic splitter and string line. Power tools may include a circular saw with a diamond blade and a plate compactor.
- Always wear protective eye wear.

For additional wall installation references go to Belgard.com.



BRISA® WALL FREESTANDING / RETAINING WALLS



20

Scan for additional product information

RESIDENTIAL	COMMERCIAL	STEPS	COLUMNS	FIRE PITS	KITCHEN	FREESTANDING WALL	RETAINING WALL
			Ð	•	×		
✓	✓	\checkmark	\checkmark	✓	✓	✓	✓

SHAPES & SIZES

Freestand	ling Wall		Retaining	Retaining Wall					
	E A	-A			PAC				
6 x 6 x 5	6 x 10 x !	5 6 x 16 x 5	6 x 6 x 8	6 x 10 x 8	6 x 16 x 8				
Column/C	orner	Cap	Cap End	Wall End					
	W	AT A	Contrast in the						
6 x 16 x 8		3 x 8 x 13½	3 x 8 x 13½	6 x 8 x 11					

U Start Base Block®



Sold separately. Recommended for use with all available wall block units. Visit Belgard.com for full product information.

 $31\!\!/_2 \times 187\!\!/_{16} \times 12^*$ $\,$ *U Start Base Block actual coverage length is $16^{11}\!/_{16}$

BRISA® WALL

UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ SQFT	WEIGHT/ UNIT	WEIGHT/ PALLET
		FREE	STANDING	WALL			
6 X 6 X 5	3.75	1.5	-	30	0.25	11	-
6 X 10 X 5	6.25	2.5	-	30	0.42	19	-
6 X 16 X 5	20	8	-	60	0.67	28	-
TOTAL	30	12	5	120	-	-	2632
		RE	TAINING W	ALL			
6 X 6 X 8	3.75	1.25	-	15	0.25	20	-
6 X 10 X 8	6.25	2.09	-	15	0.42	31	-
6 X 16 X 8	20	6.67	-	30	0.67	52	-
TOTAL	30	10	3	60	-	-	2377
		COL	_UMN/COR	NER			
6 X 16 X 8	29	9.34	2	28	1.03	57	1648
			CAP				
3 X 8 X 13½	68	8	144	126	0.63	22	2824
			CAP END				
3 X 8 X 13½	6 SF 24 LF	3	2	36	0.67	21	854
			WALL END)			
6 X 8 X 11	13.98	6.99	2	63	0.33	37	2395
		U STA	ART BASE	BLOCK			
3½ X 18% 6 X 12	-	-	7	42	6	51	2839

DIAMOND[®] 9D FREESTANDING / RETAINING WALLS





Scan for additional product information

RESIDENTIAL	COMMERCIAL	STEPS	COLUMNS	FIRE PITS	KITCHEN	FREESTANDING WALL	RETAINING WALL
			Ð	٨	×		
✓		\checkmark	✓	✓	✓	✓	✓

SHAPES & SIZES

Retaining Wall Small & Medium

BETRO .



6 x 6 x 9 6 x 10 x 9

Retaining Wall Large

Freestanding Wall Large



6 x 17¾ x 9

Freestanding Wall Small & Medium

6 x 12/10 x 9



6 x 15¾ / 17¾ x 9

Corner/Column

XL Cap



6 x 4/6 x 9

6 x 18 x 9



3 x 18/12 x 13

U Start Base Block®



Sold separately. Recommended for use with all available wall block units. Visit Belgard.com for full product information.

31⁄2 x 187⁄16 x 12*

full product information. *U Start Base Block actual coverage length is 16¹¹/16



DIAMOND® 9D



UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ SQFT	WEIGHT/ UNIT	WEIGHT/ PALLET				
	RETAINII	NG WALL -	SMALL AN	ND MEDIUM	BLOCKS						
6 X 9 X 9 6 X 10 X 9	35.52	-	-	48	.79	-	3090				
	RETAINING WALL - LARGE BLOCK										
6 X 15¾ / 17¾ X 9	35.52	-	-	48	.74	73	2900				
F	REESTAN	DING WALI	- SMALL		JM BLOCK	S					
6 X 9 X 9 6 X 10 X 9	26.4	-	-	40 (SETS)	.71	73	2378				
	FRE	EESTANDIN	IG WALL -		оск						
6 X 15¾/17¾ X 9	26.4	-	-	40	-	-	2378				
		COF	RNER/COL	UMN							
8 X 17 X 8	35.5	-	-	40	1.13	75	3300				
			XL CAP								
6 X 18 X 9	-	-	8	72	-	49	3525				
		U STA	RT BASE I	BLOCK							
3½ X 18% X 12	-	-	7	42	6	51	2839				

DIAMOND PRO®

RETAINING WALLS



Scan for additional product information

RESIDENTIAL	COMMERCIAL	STEPS	COLUMNS	FIRE PITS	KITCHEN	FREESTANDING Wall	RETAINING WALL
			Ð	ð	×		
✓	✓	✓	✓				✓

	SHAPES & SIZES											
Diamond Pro Straight Face	Dia Cor	mond Pro ner	Universal Cap		Start se Block [®] Recommended for use with all available wall block							
$8 \times 18 \times 12$ $8 \times 18 \times 9$ $4 \times 17 / 14 \times 10$ $3 \frac{1}{2} \times 187/_{16} \times 12^{*}$ $U Start Base Block actual coverage length is 1611/_{16}.$												
UNIT		SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ SQFT	WEIGHT/ UNIT	WEIGHT/ PALLET				
			DIAMOND	PRO STRA	IGHT FACE							
0 V 10 V 1	•		0	-		4	00	0550				

8 X 18 X 12	45	9	5	45	1	80	3553				
DIAMOND PRO CORNER											
8 X 18 X 9	32 10 3 30 - 100 2468										
UNIVERSAL CAP											
4 X 18 / 12 X 10½	-	-	5	60	-	49	3225				
U START BASE BLOCK											
3½ X 18½ X 12	-	-	7	42	6	51	2839				



MELVILLETM WALL FREESTANDING / RETAINING WALLS





Scan for additional product information

RESIDENTIAL	COMMERCIAL	STEPS	COLUMNS	FIRE PITS	KITCHEN	FREESTANDING Wall	RETAINING WALL
			Ð		×		
✓	✓	\checkmark	✓	✓	\checkmark	✓	✓

SHAPES & SIZES





4 x 20 x 10



*Can be used as cap and/or wall block

UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ SQFT	WEIGHT/ UNIT	WEIGHT/ PALLET
		۷	VALL BLOC	к			
4 X 20 X 10	26.67	4.44	6	48	1.79	63.75	3060
			САР				
2 X 20 X 13	100 LF	10 LF	10	60	1.66 LF	41.67	2500




STERLING[®] FREESTANDING / RETAINING WALLS / COLUMN



Scan for additional product information

RESIDENTIAL	COMMERCIAL	STEPS	COLUMNS	FIRE PITS	KITCHEN	FREESTANDING WALL	RETAINING WALL
			Ð	•	×		
✓	✓	\checkmark	✓	✓	✓	✓	✓

		SH	APES & SI	ZES				
FSW/SRW/Column Wall Block	Anchor™ Fiberglass Pins*		XL™ Cap	<u> </u>	J Start Base	Block	(Sold Separately) Recommended for use with all available	
A STA	*Pins included with pallet.		LING TO SPECIFIC				wall block units. Visit Belgard.com for full product information.	
6 x 17¾ x 12	0.5 x 5		3 x 18 / 1	2 x 13 3	3½ x 18½ x	12*	*Note: U Start Base Block actual coverage length is 1611/16	
UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ SQFT	WEIGHT UNIT	/ WEIGHT/ PALLET	
		V	VALL BLOC	К				
6 X 17¾ X 12	33.75	-	5	45	.75	77	3455	
			САР					
3 X 18 / 12 X 13	-	-	8	72	-	49	3525	
		U STA	ART BASE E	BLOCK				
31⁄2 X 181⁄16 X 12	-	-	7	42	6	51	2839	





TANDEM® WALL FREESTANDING / RETAINING WALLS



Scan for additional product information



RESIDENTIAL	COMMERCIAL	STEPS	COLUMNS	FIRE PITS	KITCHEN	FREESTANDING WALL	RETAINING WALL
			Ð	•			
✓	✓	✓	✓	✓	✓	✓	✓

SHAPES & SIZES

	Ashl	ar	Tan	de	m™
--	------	----	-----	----	----





7 x 13³/16 x 2⁵/8 7 x 15¹³/16 x 2⁵/8 7 x 187/16 x 25/8

Lamina Tandem[™]



7 x 13³/16 x 2⁵/8 7 x 15¹³/16 x 2⁵/8

Melville Tandem[™]



Tandem Column Kit



Tandem Unit 7 x 187/16 x 25/8 Column Grid Height 42

Tandem Modular Grid



42 x 283/8



8" Connecting Member



15 x 24 x 3¹⁄₄

3 x 12/8 x 12 (Sold Separately)

Tandem Modular Block® with Universal Connector



7¹/₁₆ x 7⁷/₈ x 7⁷/₈



3¹/₂ x 18¹/₂ x 12*

*Recommended for use with all available wall block units. (Sold Separately) NOTE: U Start Base Block actual coverage length is 1611/16.

UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ LAYER	WEIGHT/ LAYER	WEIGHT/ PALLET				
ASHLAR TANDEM WALL UNITS											
7 X 13¾16 X 25⁄8	19.2	3.2	-	30	.64	-	570				
7 X 15¹³⁄1₅ X 2⁵⁄8	23.1	3.85	-	30	.77	-	696				
7 X 181/16 X 25/8	27	4.5	-	30	.9	-	816				
TOTAL	70.1	11.69	6	90	2.31	175	2082				
MELVILLE TANDEM WALL UNITS											
7 X 13 ³ /16 X 2 ⁵ /8	19.2	3.2	-	30	.64	95	570				
7 X 15 ¹³ ⁄16 X 25⁄8	23.1	3.85	-	30	.77	116	696				
7 X 181⁄16 X 25⁄8	27	4.5	-	30	.90	136	816				
TOTAL	70.1	11.69	6	90	2.31	347	2082				
	L	AMINA T	ANDEM W	ALL UNIT	S						
7 X 13 ¹³ ⁄16 X 25⁄8	15.576	2.596	-	24	.649	77.08	462.48				
7 X 157⁄16 X 25∕8	18.696	3.116	-	24	.779	92.52	555.12				
7 X 18½16 X 25⁄8	21.816	3.636	-	24	.909	108	648				
TOTAL	56.08	9.35	6	72	-	277.6	1666				
TANDEM CAP UNIT											
15 X 24 X 3¼	20 SF 64 LF	2.5	8	32	.625 SF 2 LF	373.75	2990				
COLUMN KIT											
7 X 187⁄16 X 2⁵⁄8	45.43	9	5	45	2 COLUMNS/ Pallets	461.2	1350				
TANDEM MODULAR BLOCK											
77/16 X 77/8 X 77/8	49.29	12.32	4	128	0.389	704	2816				
U START BASE BLOCK											
3½ X 18½ X 12	-	-	7	42	-	51	2839				

WESTON STONE[™] FREESTANDING / RETAINING WALLS



Scan for additional product information

RESIDENTIAL	COMMERCIAL	STEPS	COLUMNS	FIRE PITS	KITCHEN	FREESTANDING Wall	RETAINING WALL
			Ð	•	×		
✓		\checkmark	✓	✓	\checkmark	✓	✓

SHAPES & SIZES

3-PieceUniversalWeston Stone Cap $4 \times 8 / 5 \times 8$ $4 \times 12 / 9 \times 8$ $4 \times 16 / 13 \times 8$ $4 \times 12 \times 8$ $10 \frac{1}{2} \times 2\frac{3}{8}$


UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	SQFT/ UNITS	WEIGHT/ LAYER	WEIGHT/ PALLET		
3-PIECE MODULAR									
4 X 8/5 X 8	-	-	-	-	-	16.9	-		
4 X 12/9 X 8	-	-	-	-	-	26.1	-		
4 X 16/13 X 8	-	-	-	-	-	36.4	-		
TOTAL	42	6	7	126	-	-	3400		
UNIVERSAL									
4 X 12 X 8	40	6.6	6	120	-	30	3614		
WESTON STONE CAP									
10½ X 10½ X 2¾	112	9.33	12	144	.83	-	3136		

WESTON STONE[™] INSTALLATION INSTRUCTIONS


This is a pinless system. Maximum wall height is 2½ feet. Walls exceeding 2½ feet in height may require geogrid reinforcing and the consultation of a qualified engineer. Contact your Belgard sales representative or dealer for assistance.

Weston Stone wall units must be glued with a quality construction adhesive to develop the necessary mechanical bond. All measurements herein are approximate. Natural materials are used in the manufacturing of this product.

WESTON STONE[™] WALL PATTERNS

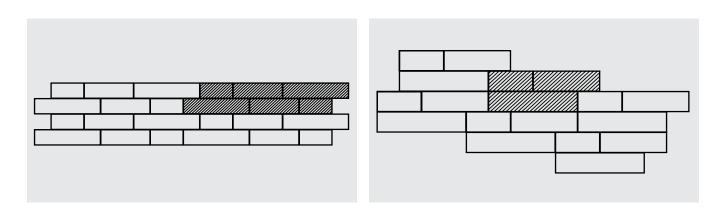

TYPICAL CROSS SECTION WITH WESTON STONE SEAT WALL

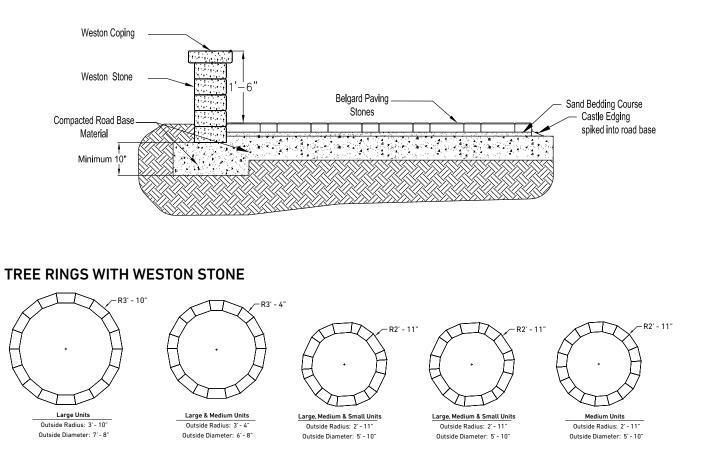

FIRE FEATURES

FIRE FEATURES INSTALLATION GUIDE

76 Installation Instructions

FIRE FEATURES

- 77 Melville[™] Series
- 80 Bordeaux[™] Series
- 83 Brighton[™] Series
- 85 Bristol[™] Series
- 88 Weston Stone Fire Pit Kit

STANDARD INSTALLATION INSTRUCTIONS

GRAVEL BASE

Gravel Fill shall be a clean angular stone or angular granular fill meeting the following gradation as determined in accordance with ASTM D 422.

<u>Sieve Size</u>	Percent Passing			
1-in	100			
3/4-in	75-100			
No. 4	0-60			
No. 40	0-50			
No. 200	0-12			

FOUNDATION PREPARATION

Following excavation of the leveling pad, foundation soil shall be examined to assure the actual foundation soil strength meets or exceeds the assumed design bearing strength. Soils not meeting the required strength shall be removed and replaced with soil meeting the design criteria.



Scan for Fortified Installation Method to be used with soft soils or expanding clays

LEVELING PAD PREPARATION

A minimum 18-in thick layer or compacted granular material shall be placed for use as a leveling pad up to the grades and locations as shown on the construction drawings. The granular base shall be compacted to a firm, level bearing pad on which to place the bottom level of the unit. A leveling pad consisting of 6-in (minimum) thick lean, unreinforced concrete may be used at the contractor's option, or if so detailed on the plans. The leveling pad should extend a minimum of 6-in from the toe and from the heel of the unit base.

GRAVEL FILL

Gravel fill shall be placed to the minimum finished thickness and width shown on the construction plans.

Gravel lifts shall be a maximum thickness of 6-in.

Lifts shall be compacted by three passes of a light weight vibratory plate compactor.

For areas not affected by freeze-thaw conditions please contact your local Belgard sales representative for further installation information.













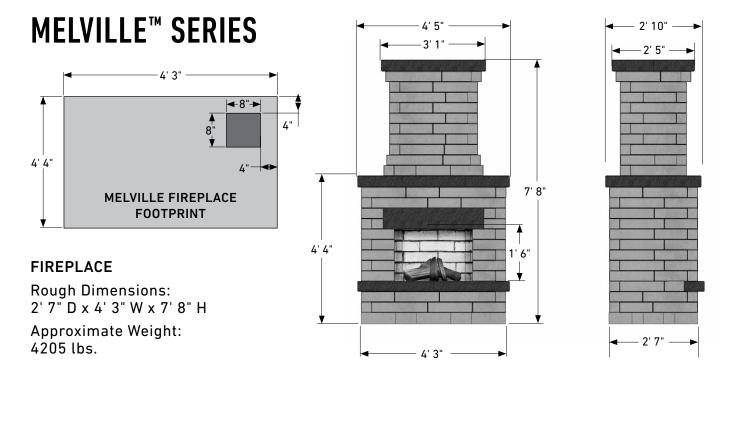


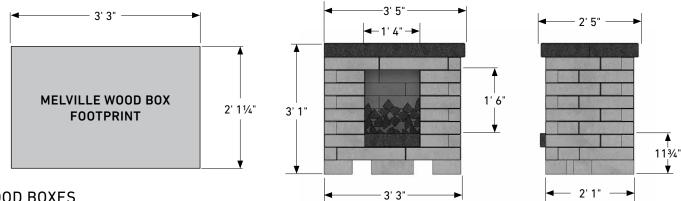


WOOD BOXES

Rough Dimensions: 2' 1" D x 3' 3" W x 3' 1" H

Approximate Weight: 3070 lbs. or 1535 lbs. each

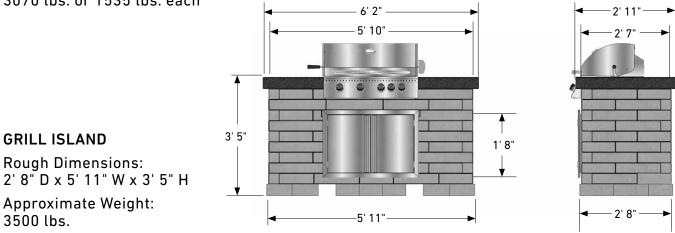

MELVILLE[™] SERIES

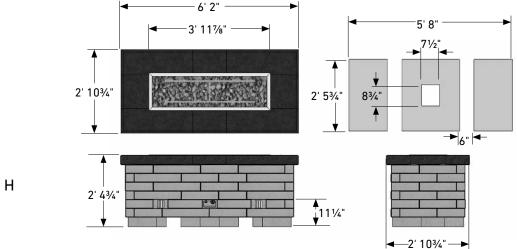


LINEAR FIRE TABLE Rough Dimensions: 2' 6" D x 5' 8" W x 2' 5" H Approximate Weight: 2500 lbs.

LINEAR FIREPLACE

Rough Dimensions: 2' 6" D x 7' 1" W x 5' 4" H

Approximate Weight: 4000 lbs.

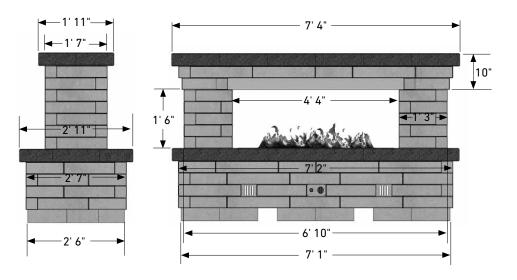

FIREPLACE

13070020 Melville Wood Fireplace Colors: Scandina Gray/Midnight

WOOD BOXES

13140010 Melville Wood Boxes (Pair) Colors: Scandina Gray/Midnight

36" wood burning fireplace can be converted to a vented gas unit on-site.

GRILL ISLAND

13110028 Melville Grill Island Colors: Scandina Gray/Midnight

LINEAR FIREPLACE

13000026 Melville Linear Fireplace Colors: Scandina Gray/Midnight

LINEAR FIRE TABLE

13000027 Melville Linear Fire Table Colors: Scandina Gray/Midnight













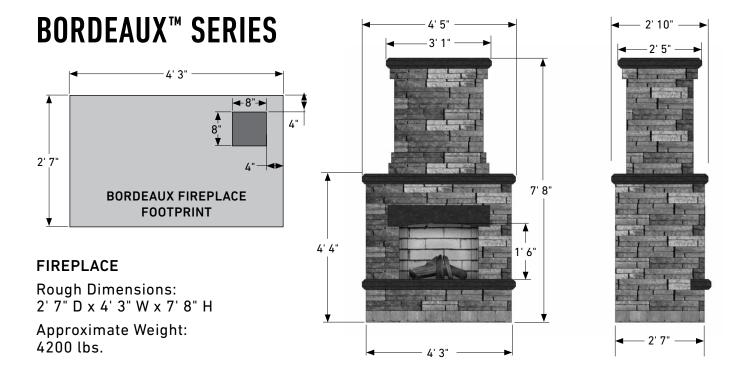


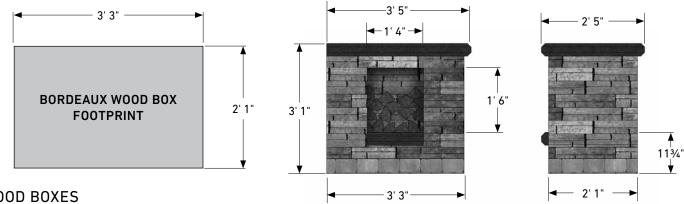

WOOD BOXES

2500 lbs.

Rough Dimensions: 2' 1" D x 3' 5" W x 3' 1" H Approximate Weight: 3070 lbs.

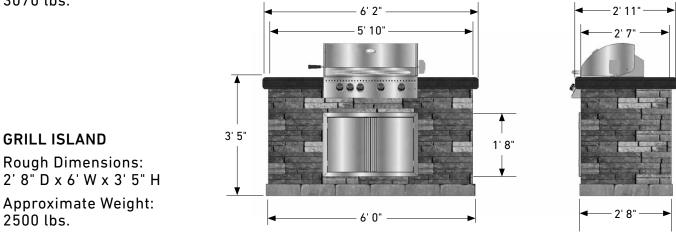

6' 2' **BORDEAUX[™] SERIES** 5' 8" 3' 11%" 2' 10¾" 2' 5¾" 83/4" 4 LINEAR FIRE TABLE **Rough Dimensions:** 2' 10³/₄" D x 6' 2" W x 2' 4³/₄" H 2' 43/4 Approximate Weight: **≜** ⊥111⁄4" 2500 lbs. -2' 10¾"-2' 0' 7'4 LINEAR FIREPLACE 10' **Rough Dimensions:** 2' 6" D x 7' 1" W x 5' 4" H 4' A Approximate Weight: 3700 lbs. 6'10" 2' 6' 7'1"

FIREPLACE

70300791

Bordeaux Wood Fireplace Colors: Lamina Sienna/Cordova Stone Buff Base + Top

13070014

Bordeaux Wood Fireplace Colors: Lamina Sienna/Cordova Midnight Base + Top

13070012 Bordeaux Wood Fireplace Colors: Lamina Pewter Midnight Base + Top

WOOD BOXES

13140001

Bordeaux Wood Boxes (Pair) Colors: Lamina Sienna/ Cordova Stone Buff

13140020

Bordeaux Wood Boxes (Pair) Colors: Lamina Sienna/ Cordova Stone Midnight

13140021

Bordeaux Wood Boxes (Pair) Colors: Lamina Pewter Midnight Base + Top

GRILL ISLAND

13110010 Bordeaux Grill Island (NG) Colors: Lamina Sienna/ Cordova Stone Buff + Stainless

13110011

Bordeaux Grill Island (LP) Colors: Lamina Sienna/ Cordova Stone Buff + Stainless

13110014

Bordeaux Grill Island (NG) Colors: Lamina Sienna/ Cordova Stone Midnight + Stainless

13110015

Bordeaux Grill Island (LP) Colors: Lamina Sienna/ Cordova Stone Midnight + Stainless

LINEAR FIREPLACE

13000021 Bordeaux Linear Fireplace Colors: Sienna/Buff

13000019 Bordeaux Linear Fireplace

Colors: Sienna/Midnight 13000020

Bordeaux Linear Fireplace Colors: Pewter/Midnight

LINEAR FIRE TABLE

13000023 Bordeaux Linear Fire Table Colors: Sienna/Buff

13000204 Bordeaux Linear Fire Table Colors: Sienna/Midnight

13000203 Bordeaux Linear Fire Table Colors: Pewter/Midnight

36" wood burning fireplace can be converted to a vented gas unit on-site.













BRIGHTON[™] SERIES

FIREPLACE

Rough Dimensions: 3' 4" D x 4' 4" W x 8' 4" H

Approximate Weight: 5825 lbs.

FIREPLACE

70580007

Brighton Fireplace Colors: Weston Gascony Tan/Urbana Ashbury Haze Base + Top

70580378

Brighton Fireplace Colors: Weston Cotswold Mist/Urbana Brookstone Slate Base + Top

36" wood burning fireplace can be converted to a vented gas unit on-site.

WOOD BOXES

Rough Dimensions: 2' 4" D x 3' W x 2' 11" H

Approximate Weight: 3200 lbs.


WOOD BOXES

70300046

Brighton Wood Boxes (Pair) Colors: Weston Gascony Tan/Urbana Ashbury Haze

70580291

Brighton Wood Boxes (Pair) Colors: Weston Cotswold Mist/Urbana Brookstone Slate




4' 4"



3' 4"

3' 2"

3' 9"

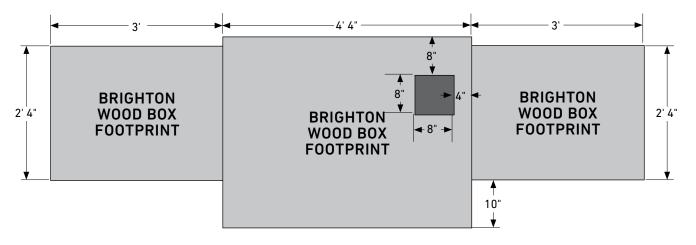

8'4"

4'7"











BRISTOL[™] SERIES

FIREPLACE

Rough Dimensions: 3' D x 5' W x 9' 6" H

Approximate Weight: 5825 lbs.

FIREPLACE

70580261 Colors: Weston Gascony Tan/ Arbel Ashbury Haze Base + Top


70580312 Colors: Weston Cotswold Mist/ Arbel Brookstone Slate Base + Top

36" wood burning fireplace can be converted to a vented gas unit on-site.


WOOD BOXES

Rough Dimensions: 2' 4" D x 3' W x 3' 3" H

Approximate Weight: 3950 lbs.







11





Rough Dimensions: 2' D x 5' W x 11" H

Approximate Weight: 1180 lbs.

WOOD BOXES (PAIR)

70580334

70580534

Brookstone Slate
ARCHED HEARTH
70580262

Colors: Weston Gascony Tan/

Colors: Weston Cotswold Mist/Urbana


Urbana Ashbury Haze

Colors: Weston Gascony Tan/ Arbel Ashbury Haze

70580309


Colors: Weston Cotswold Mist/ Arbel Brookstone Slate



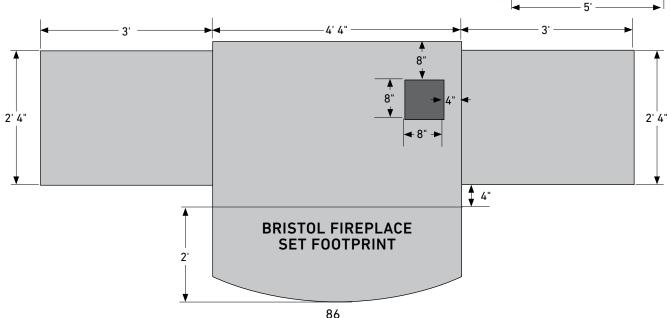

BELGARD[®] RESOURCE GUIDE | BELGARD.COM | 877-235-4273

BRISTOL[™] SERIES

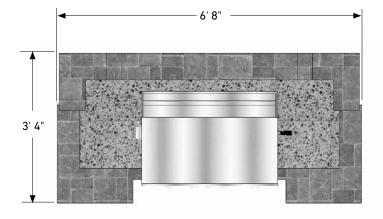

GRILL ISLAND

Rough Dimensions: 3' D x 6' 8" W x 4' 4" H


Approximate Weight: 3980 lbs.


GRILL ISLAND


13110008 Bristol Grill Island (NG) Colors: Weston Gascony Tan/ Arbel Ashbury Haze + Stainless

11130250

Bristol Grill Island (LP) Colors: Weston Gascony Tan/ Arbel Ashbury Haze + Stainless

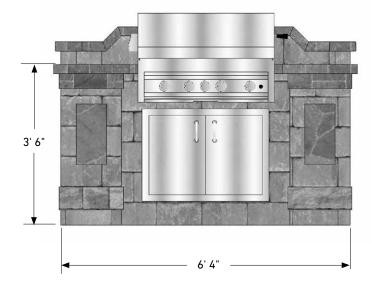



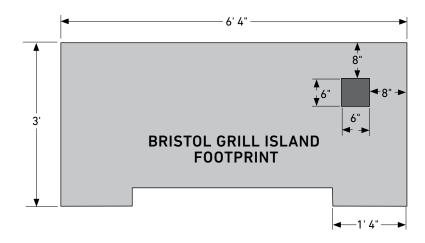

WESTON STONE[™] FIRE PIT KITS



$\begin{array}{ c c c c c c c c c c c c c c c c c c c$	RESIDENTIAL	COMMERCIAL	STEPS	COLUMNS	FIRE PITS	KITCHEN	FREESTANDING Wall	RETAINING WALL
✓ ✓ ✓				Ð	•	×		
	✓				✓			

SHAPES & SIZES

Fire Pit Kit



4 x 8 x 8 Outside is 4'7" in diameter Stacks up to 4 rows high

Stacks up to 4 rows high

Fire Pit Kit with Elements[™] Smoke-less Fire Ring





4 x 8 x 8

UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET		WEIGHT/ UNIT	WEIGHT/ PALLET	
FIRE PIT KIT								
4 X 8 X 8	-	-	-	36	-	-	-	

FIRE PIT KITS INSTALLATION INSTRUCTIONS

- Always use in accordance with all applicable local and state fire codes
- Failure to follow these instructions could result in a hazardous fire causing property damage or physical injury
- Caution: For outdoor use only
- Use the fire ring on stone, dirt or sand surfaces
- For adult use only do not allow children to use the fire ring
- Do not use on lawns, wooden decks, concrete or asphalt
- Do not use fire ring indoors or under a patio roof
- Do not use in windy conditions
- Do not leave fire unattended at any time
- Do not use under tree branches, trellis, or overhangs of any kind, including covered porches
- Do not use flammable liquids such as gasoline, alcohol, diesel fuel, kerosene, or charcoal lighter fluid to light or relight fires as this may also cause paint to flake off fire ring

- Care should be taken to make sure all combustible material is far enough away from the fire ring not to ignite it
- Avoid using softwoods such as pine or cedar because they are likely to throw sparks — hardwoods are recommended
- Keep children and pets away from the fire ring while it is in use
- Exercise the same precautions you would with any open fire
- Do not wear flammable or loose clothing when tending an open fire
- Avoid touching surfaces as they will be extremely hot
- Assure the fire is completely extinguished before leaving fire ring
- Any modifications to this appliance may be dangerous and are not permitted

ADDITIONAL MATERIALS NEEDED

- Tamper
- Level
- 2 Bags of Leveling Sand
- 2 Tubes of Concrete Adhesive
- Caulk Gun
- 3 Bags of Gravel or Lava Rock
- Shovel
- Optional Marking Paint or Chalk

ACCESSORIES

ACCESSORIES

- 91 Anglia Edger®
- 92 Artforms[™]
- 94 Granika Step®
- **95** Landings[™] Step Unit
- 98 Marina[™] Coping
- 100 Konza Caps Fire Pit, Pillar & Seat Wall caps







RESIDENTIAL	COMMERCIAL	STEPS	CAPS	COPING
			Ð	
✓				

SHAPES & SIZES

Multi-Piece









5¼ x 75⁄8 x 8

5¼ x 10 x 8

5¹/₄ x 15⁵/₈ x 8 5¹/₄ x 17⁵/₈ x 8

UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ SQFT	WEIGHT/ UNIT	WEIGHT/ PALLET		
MULTI-PIECE									
5¼ X 75∕8 X 8	-	-	-	16	-	25	-		
5¼ X 10 X 8	-	-	-	16	-	31	-		
5¼ X 15% X 8	-	-	-	16	-	47	-		
5¼ X 17% X 8	-	-	-	24	-	52	-		
TOTAL	78.4	-	3	120	-	-	2550		

ARTFORMS[™]





Scan for additional product information


RESIDENTIAL	COMMERCIAL	STEPS	CAPS	FIRE PITS	KITCHEN	FREESTANDING WALL	RETAINING WALL
			Ð	ð	×		
✓	✓		✓	✓	✓	✓	

SHAPES & SIZES								
18 x 36*	6 x 3	36*	Installatio	on Hardwar	e			
								10000
3 × 18 × 36	3 ×	6 × 36	Anchor Slide & Nu	Joining It Plate	Outer Corne		er	Stretcher
*Pallets contain both ope closed ended units	en and		50 per box	10 per box	10 per l	оох 10 р	er box	10 in a bundle
UNIT		SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ LAYER	UNITS/ SQFT	WEIGHT/ PALLET
3 × 18 × 36		81	9	9	18**	2	4.5	2682***
3 × 6 × 36		31.5	10.5	3	21**	7	1.5	1029

Total number of both open and closed end panels. 18 x 36 pallets contain 9 of each. 6 x 36 pallets contain 3 open end panels and 18 closed end panels *150lbs is the weight for the closed units, 148lbs is the weight for the open units.

18 X 36 X 3



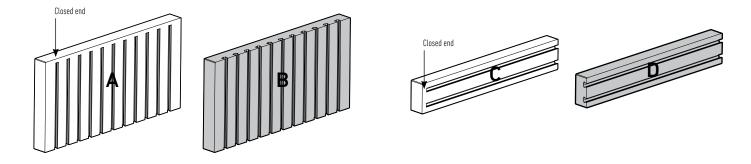



PANEL CONFIGURATIONS

IDEAL:

This configuration uses equal number of panel A and panel B.









NOT OPTIMAL:

This configuration uses panel A only.






B

NOT **RECOMMENDED:**

This configuration uses panel B only and the dovetails are exposed. Use ideal configuration as shown above.



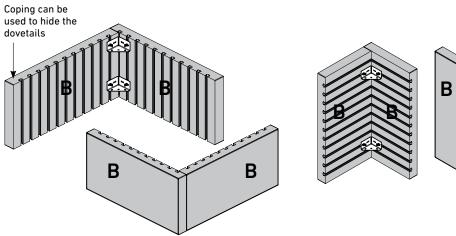

*IMPORTANT: When planning configurations, consider the amount of panel A and panel B on a pallet. 18 x 36' panels are sold in pair/layer or in full pallet only. 6 x 36 panels are sold in layer or in full pallet only.







RESIDENTIAL	COMMERCIAL	STEPS	CAPS	COPING
			Ð	
✓	✓	✓		

SHAPES & SIZES

Step Unit



6 x 18 x 38

UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ SQFT	WEIGHT/ UNIT	WEIGHT/ PALLET	
STEP UNIT								
6 X 18 X 38	-	-	-	8	-	2250	-	

LANDINGS[™] STEP UNIT





Scan for additional product information

RESIDENTIAL	COMMERCIAL	STEPS	CAPS	COPING
			Ð	Î
✓	✓	✓		

SHAPES & SIZES

Step Unit



6 x 18 x 48

UNIT		SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET		WEIGHT/ UNIT	WEIGHT/ PALLET
STEP UNIT								
6 X 18 X 4	48	-	-	-	6	-	460	2760





LANDINGS[™] STEP UNIT INSTALLATION

Each Landings[™] Step Unit is manufactured with two unique face patterns. The step units are palletized and packaged for easy skid-steer loader removal. Care needs to be taken in handling these units. If a blemish occurs on one side of unit, rotate 180° before setting unit into place.

BASE COURSE

Excavate an area 6 inches deep by 1 foot longer by 1 foot wider than the installed step(s) size. Add a minimum of 6 inches of compactable base material, 3/4-inch minus (with fines) aggregate. Compact and level. Set unit and, if desired, add a slight pitch of no more than 1/4 inch toward the front of the step to shed moisture. If installing step units next to a retaining wall, keep units level from front to back.





Place Units so They Nest Tightly Together.



Two unique faces on each step

STAIR TREAD


For each consecutive step, follow base course instructions, making sure the top of the base is even with the top of the previously installed unit. Recommended tread depth is a minimum of 10 inches, but no more than 16 inches. When installing steps adjacent to a finished surface such as pavers, as illustrated, a 6-inch-tall dummy block needs to be installed below the first step.


LANDING

For landing(s) follow base course instructions. Each step unit is manufactured with two unique face patterns. The face patterns are manufactured to nest together, which will create a narrower joint, providing pleasing aesthetics.

STEPS IN A 90-DEGREE WALL

When building into a retaining wall, construct the steps first and build the walls adjacent to the steps.

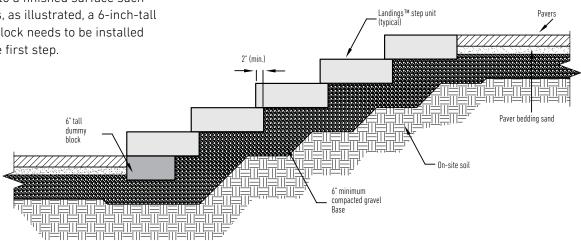



SKID-STEER LOADER

Slide forks underneath the first step unit and lift off pallet. Set the step unit onto its desired location, using a spacer to ease in fork removal.



A helpful tip to protect the step unit is to wrap the fork of the skid-steer with corrugated plastic packaging from the pallet or other protective materials. Secure to the forks.



CLAMP

Using a materials clamp, center the clamp on the step unit. Attach clamp to skid-steer or mini-excavator and slowly lift the step unit off of the pallet and move it into place. Be sure to have a second person to help guide the unit into place as the machine sets the step unit down.



STRAPS

When using a heavy duty strap(s), start by wrapping the strap(s) around the center if using one or close to step unit ends if two straps are being used. Cinch the strap(s) tight and attach the looped ends of the strap(s) to skid-steer or mini-excavator. Slowly lift the step unit from the pallet and move it into place. Be sure to have a second person to help guide the unit into place as the machine sets the step unit down. Using a spacer will help to ease in the strap removal.



CART

When using a cart, place provided corrugated plastic from pallet or other protective material onto the cart to help protect the step unit. With help from a second person, slowly slide the step unit from the pallet onto the cart. Maneuver the unit carefully into place.

Videos can be found on our YouTube channel: www.youtube.com/anchorblockmn

MARINA[™] COPING





Scan for additional product information

RESIDENTIAL	COMMERCIAL	STEPS	CAPS	COPING	
G			Ð	Û	
1		✓	✓	✓	

SHAPES & SIZES


60mm



5¹⁵/16 x 11¹³/16 x 2³/8

UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET		WEIGHT/ UNIT	WEIGHT/ PALLET	
60mm								
5 ¹⁵ ⁄16 X 11 ¹³ ⁄16 X 23⁄8	97.5 LF	2.5 LF	5	195	0.5 LF	-	3608	

MARINA COPING - POOL INSTALLATON

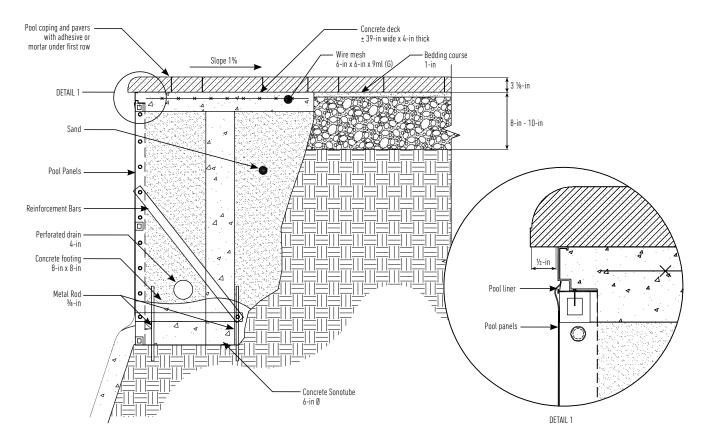

MARINA COPING - STEP INSTALLATON

OPTION 1

- A. Marina Coping
- B. Wall Block
- C. Grey block (4 in x 8 in x 16 in) or Wall Block


Note: All elements must be glued together with the concrete adhesive


OPTION 2

A. Marina Coping

B. Wall Block

Note: A & B elements must be glued together with the concrete adhesive.

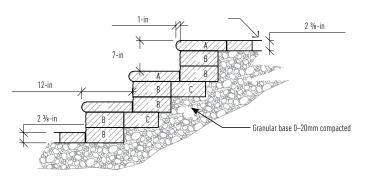

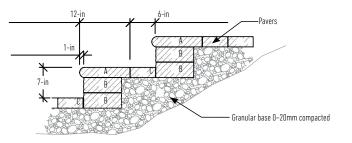

KONZA CAPS





Scan for additional product information

RESIDENTIAL	COMMERCIAL	STEPS	CAPS	COPING
			Ð	Ĩ
✓			✓	✓

SHAPES & SIZES

Fire Pit Cap	30 Inch Cap	24 Inch Cap	Seat Wall Cap
\bigcirc			
56 Outside 36 Inside Diameter x 2½	30 x 30 x 2½	24 x 24 x 2½	14 x 30 x 2½

*4 pieces make a circle.

UNIT	SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	UNITS/ SQFT	WEIGHT/ UNIT	WEIGHT/ PALLET	
		F	IRE PIT CA	١P				
56 Outside Diameter X 2½	-	-	-	8	-	75	626	
PILLAR CAPS								
30 X 30 X 2½	-	-	-	6	-	243	1512	
24 X 24 X 2½	-	-	-	8	-	115	950	
SEAT WALL CAP								
14 X 30 X 2½	-	-	-	18	-	57	1080	



ASH GROVE

4201 Powell Drive Bonner Springs, KS 66012 Ph: 913-667-1792 National Ph: 877-235-4273

STAY CONNECTED WITH BELGARD.





Facebook.com/OutdoorLivingbyBelgard

You YouTube.com/BelgardHardscapes

Twitter.com/Belgard

Belgard.com/Blog

9

