#### PORCELAIN COLLECTION

# GLOCAL CONCRETE FINISH | 20MM




The smooth concrete-like finish offers a clean, contemporary aesthetic. Its structured and tight surface texture in neutral shades makes this porcelain paver a versatile design element.





\*Not available in 32 x 32 or 48 x 48 \*\*Only available in 32 x 32 and 48 x 48

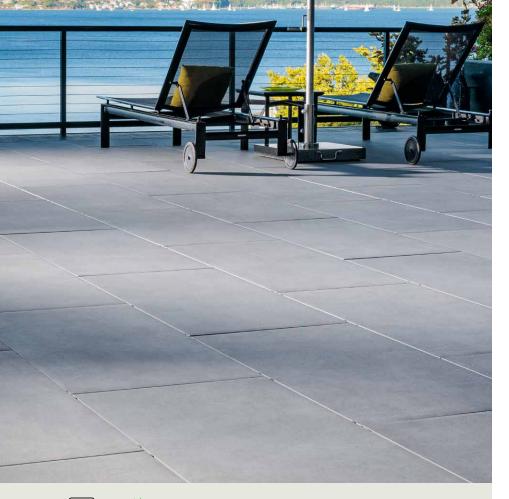

v2 SLIGHT VARIATION LOW SOLAR HEAT ABSORPTION

### PALLET INFORMATION

GLOCAL		SQFT/ Pallet	SQFT/ BOX	BOXES/ PALLET	PCS/ BOX	WEIGHT/ BOX	WEIGHT/ PALLET
24 X 24	23.54 x 23.54 x ¾	232.5	7.75	30	2	72	2160
36 X 36	35.51 x 35.51 x ¾	156.94	8.72	18	1	82.89	1525
24 X 48	23.54 x 47.17 x ¾	271.25	7.75	35	1	74	2621
48 X 48	47.17 x 47.17 x <sup>3</sup> ⁄4	279	15.5	18	1	148.5	2774.2

Downloadable professional resources available at Belgard.com/Resources



#### **QUALITY FOR LIFE**


Every step of our manufacturing process incorporates rigorous research, testing and quality assurance. We demand the highest quality from each of our facilities across North America. We believe in creating world class building products that stand the test of time. See our lifetime warranty at **Belgard.com/Warranty** 

## FEATURES & BENEFITS

- · Contemporary polished concrete texture
- · Incredibly high breakage loads, up to 3,000 pounds
- Modular for faster installation
- · Can be cleaned with normal household cleaners and even pressure washed with a low pressure washing device.\*
- High density and ultra-low absorption rate creates a tight surface texture and fends off surface mold, moss, dirt and other types of stains
- Unaffected by alkalis, acids, chemical agents, salt and other de-icing materials
- · Structured top textures create non-slip surfaces
- Freeze thaw resistant—100% frost-free and properties remain unaltered at temperatures ranging from -51.1° to + 60° C (-60°F to +140°F)

\* It is important that all pressure washing of your porcelain pavers be done with a low pressure washer with a maximum of 1600 psi and nothing more powerful. When pressure washing your installation, care should be taken to prevent damage to the grout (adhesive and grout installations) and some re-sanding will be necessary when power washing an installation with sand or polymeric sand joints.

## SHAPES & SIZES



on Belgard.com for more information



ТАМРА 4630 Woodland Corporate Blvd. Tampa, FL 33614 Ph: 813-783-1970

AN OLDCASTLE<sup>®</sup> APG OUTDOOR BRAND