

AQUALINE

PERMEABLE PAVER

LOW MAINTENANCE AND PROVEN DURABILITY IN A CONTEMPORARY 3-PIECE SYSTEM



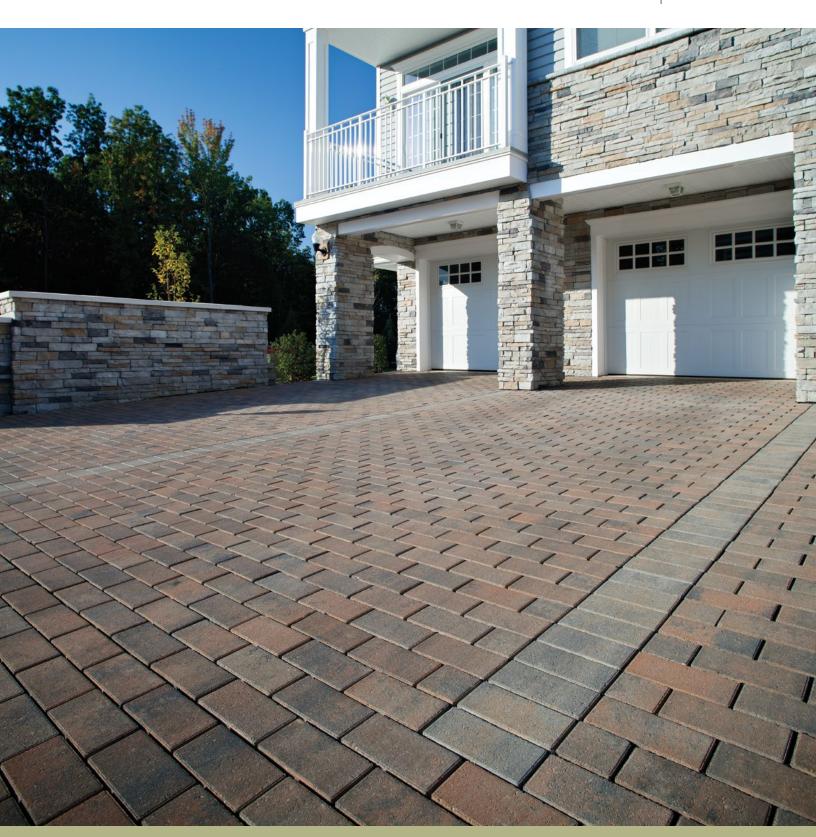

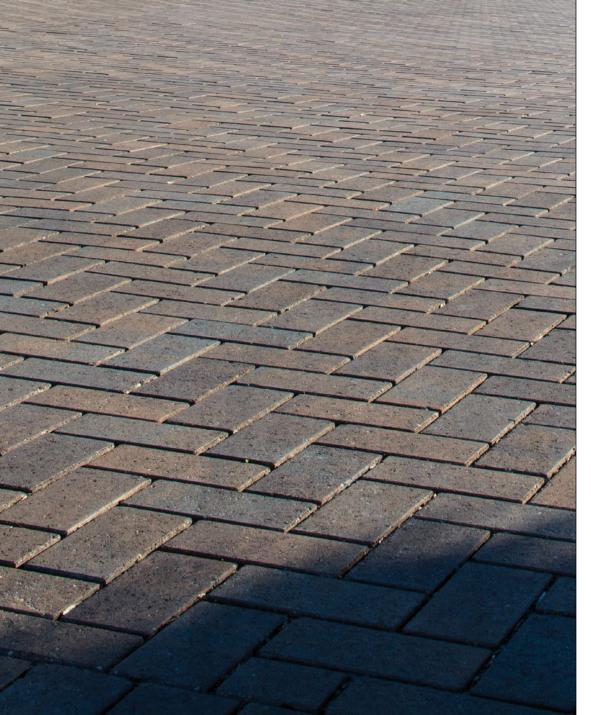

AQUALINE*

PERMEABLE PAVER

LOW MAINTENANCE AND PROVEN DURABILITY IN A CONTEMPORARY 3-PIECE SYSTEM

⊘ FEATURES & BENEFITS

- Interlocking spacer bars for increased structural performance
- · Smooth surface with a microchamfer to minimize vibration and enhance wheelchair comfort
- · Can be utilized to construct an ADA-compliant pavement
- True installed dimensions for design optimization
- Optimal joint openings for infiltration and maintenance
- Can eliminate stormwater runoff and improve water quality
- · Meets the requirements of ASTM C936
- · Chamfer Width: 3 mm
- Spacer Bar Width: 10 mm
- Surface Infiltration Rate: > 500 inches per hour (varies based on joint infill gradation)
- Surface Open Area: 12%
- · Can be installed mechanically

♦ AVAILABLE COLORS



VICTORIAN

🗞 SHAPES & SIZES

80MM



4½ x 9 x 31/8

NOTE: Sold in herringbone machine lay pattern. Multiple half pieces on every layer.









