

BELAIR WALL[®]

FREESTANDING & RETAINING WALL


CHISELED STONE APPEARANCE FOR SOPHISTICATED LANDSCAPES



BELGARD
PAVES THE WAY[™]



BACKED BY
ANCHOR
DIAMOND[™]
INDUSTRY EXPERTS

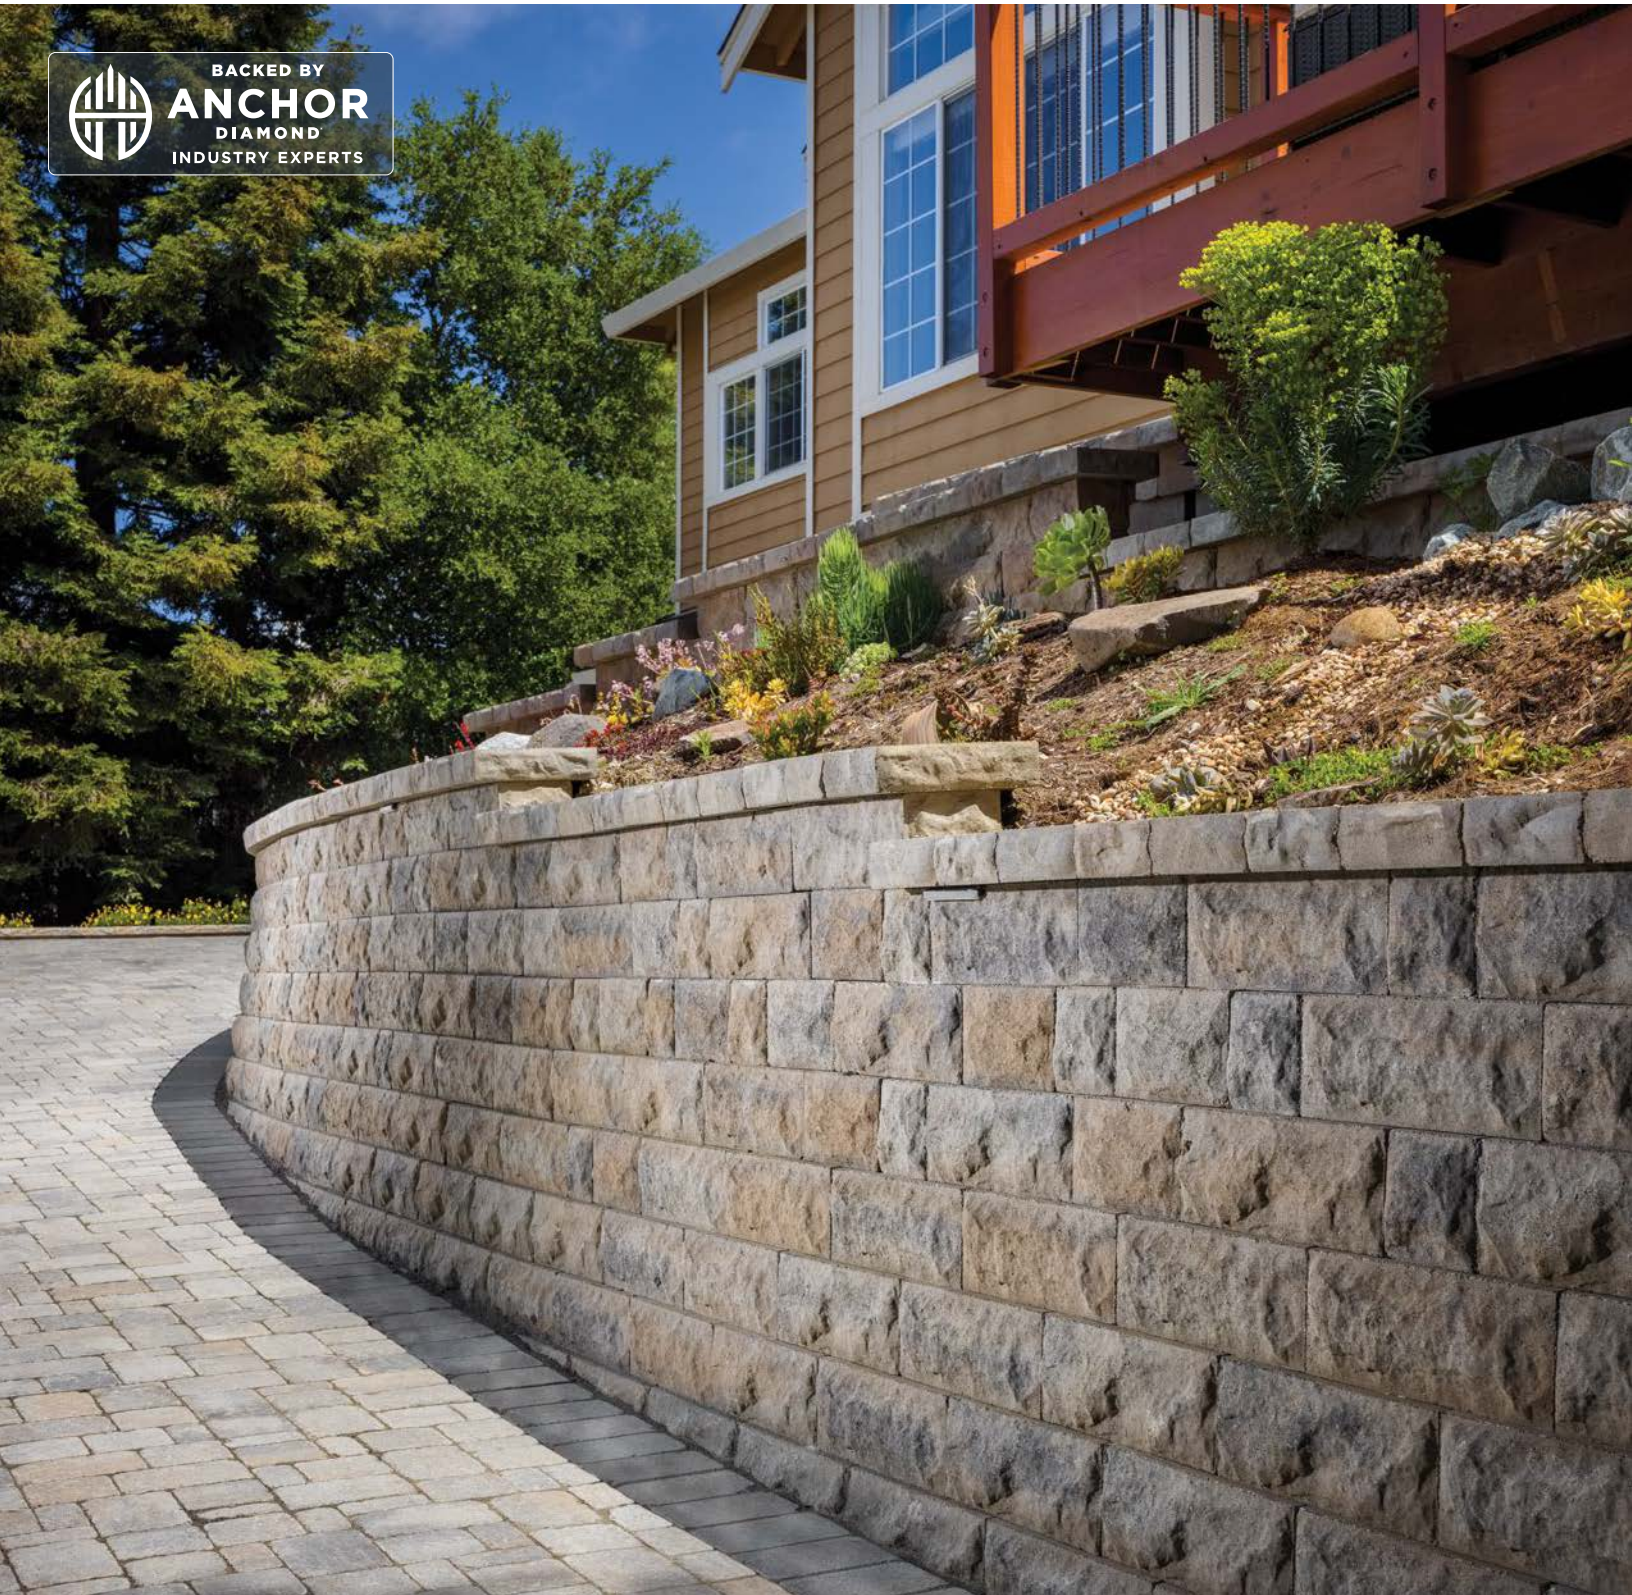



BELAIR WALL®

FREESTANDING & RETAINING WALL

CHISELED STONE APPEARANCE FOR SOPHISTICATED LANDSCAPES

☑ FEATURES & BENEFITS

- Freestanding & gravity walls* can be built up to 3 feet high, including buried course
- Taller walls can be built using geosynthetic reinforcement when designed by a qualified engineer
- Rear-lip on retaining wall block makes installation fast and accurate
- Freestanding Walls: 4-foot minimum radius using all 3 units
- Retaining Walls: 1"/9.5° Setback/System batter
- Minimum outside radius, measured on the top course to the front of the units: 4 feet
- Minimum inside radius, measured on the base course to the front of the units: 8 feet

🧱 SHAPES & SIZES

FSW



6 x 8 / 6 x 11



6x16/14x11

COLUMN/CORNER



6 x 16 x 8

TRAPEZOID DOUBLE-SIDED CAP



3 x 7 / 8 x 13½

CAP END 3-SIDED



3 x 8 x 13½

WALL END 3-SIDED



6 x 8 x 11

U START BASE BLOCK®



3½ x 18½ x 12

🔹 CROFTON SERIES



DANVILLE BLEND



SABLE BLEND

BELGARD® | PAVES THE WAY

For more info, visit Belgard.com

MID-ATLANTIC CROFTON

2630 Conway Road
Odenton, MD 21113
Ph: 301-261-0200

RICHMOND

1231 Willis Road
Richmond, VA 23237
Ph: 804-279-7501



© 2022 Oldcastle® APG, Inc. A CRH Company. All Rights Reserved.
Revised: 12/06/22 BEL22-412_Mid-Atlantic