

STERLING[®]

WALL SYSTEM


A VERSATILE RETAINING OR FREESTANDING WALL SYSTEM THAT
INSTALLS WITH AN EASY TO LOCATE PIN SYSTEM



BELGARD
PAVES THE WAY[™]



DEVELOPED BY
ANCHOR
DIAMOND
WALL INDUSTRY EXPERTS

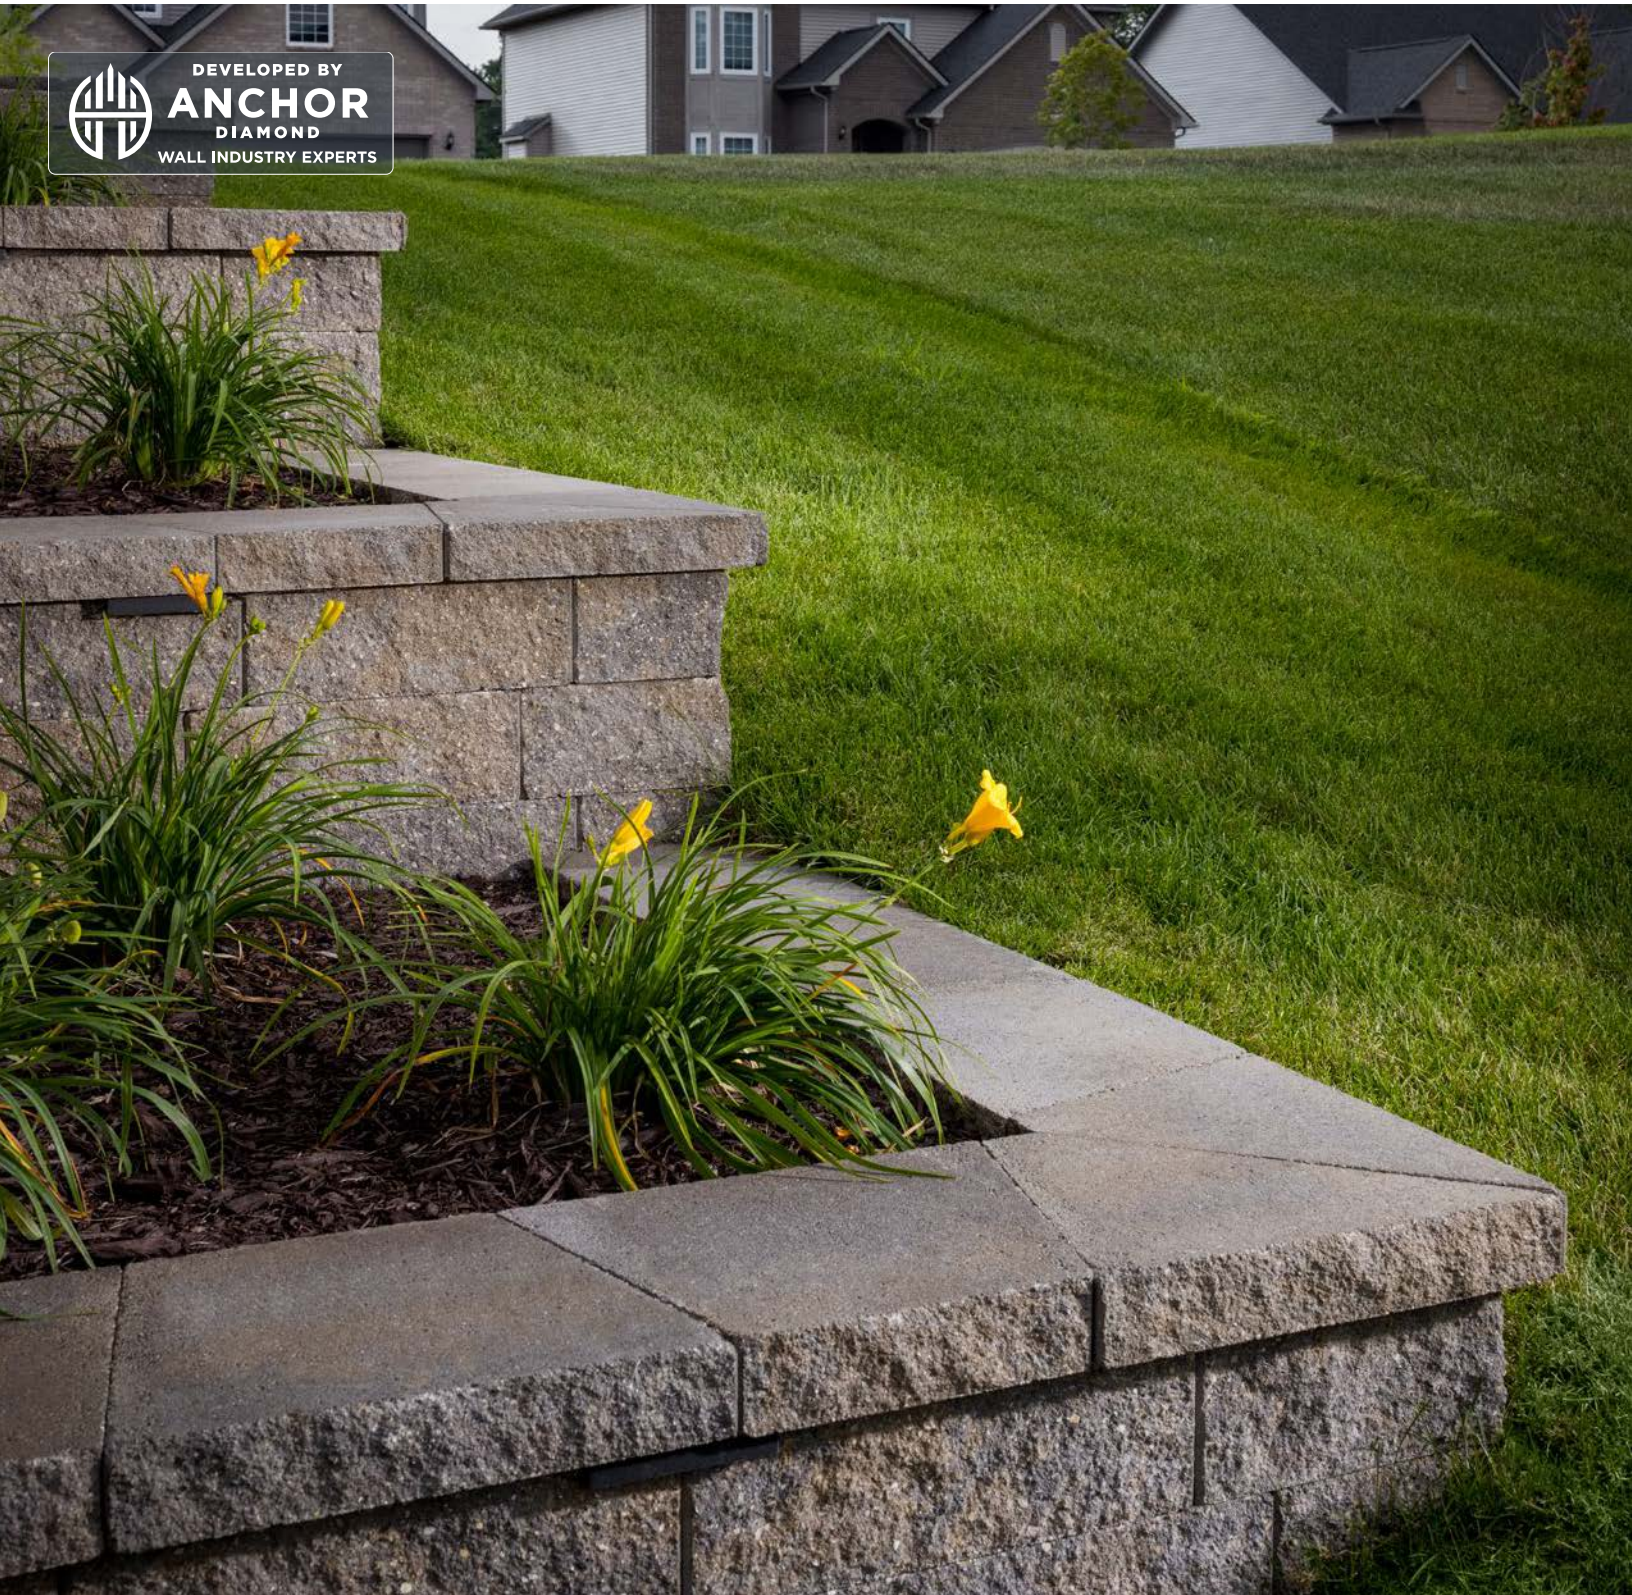



STERLING®

WALL SYSTEM

A VERSATILE RETAINING OR FREESTANDING WALL SYSTEM THAT INSTALLS WITH AN EASY TO LOCATE PIN SYSTEM

✔ FEATURES & BENEFITS

- Build retaining walls with easy pin alignment and side view for placement visualization
- Block channels make easy pin alignment for battered or freestanding retaining walls
- Score marks for splitting block to make a two-sided freestanding wall unit
- Center score mark provides guide for splitting to make corner or column units
- Hand holds allow for easier handling during installation
- Maximum gravity retaining wall height is 4 ft*
- Retaining wall minimum inside radius, measured on the base course to the front of the units: 6 ft
- Retaining wall minimum outside radius, measured on the top course to the front of the units: 4 ft
- Maximum freestanding wall (FSW) height is 3 ft*
- Freestanding wall minimum radius 4 ft
- Maximum column height is 4 ft*
- Segmental retaining wall setback/system batter 10.6°

🔹 AVAILABLE COLORS




ASHBURY HAZE



BUFF



COTSWOLD MIST



PEWTER



SILVER

📦 SHAPES & SIZES

RETAINING WALL BLOCK



6 x 17³/₄ x 12

ANCHOR™ FIBERGLASS PINS*



5 x 1/2

UNIVERSAL CAP



3 x 18/12 x 13

* Not included on pallet.

BELGARD®

PAVES
THE WAY

For more info, visit Belgard.com

NORTHFIELD CENTRAL

One Hunt Court
Mundelein, IL 60060
Ph: 877-222-1557

N59 W14909 Bobolink Ave.
Menomonee Falls, WI 53051
Ph: 262-338-5700



© 2023 Oldcastle® APG, Inc. A CRH Company. All Rights Reserved.
Revised: 03/30/23 BEL22-412_NFD C