

BELAIR WALL®

RETAINING | FREESTANDING







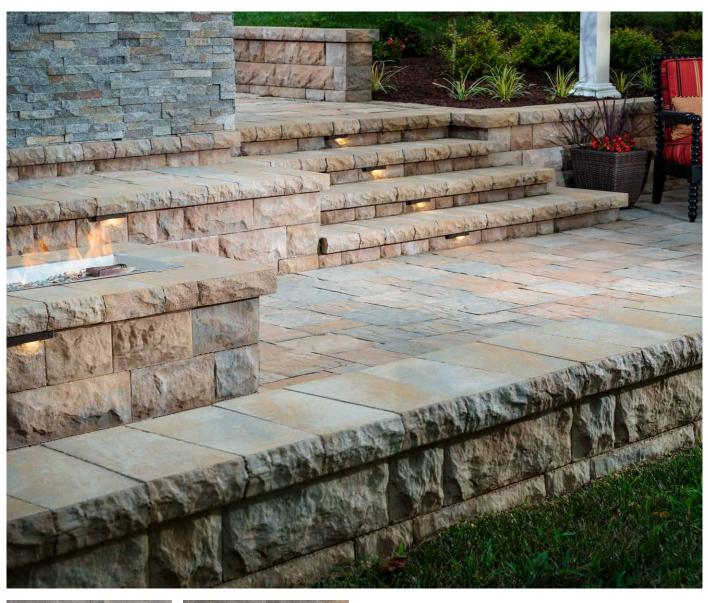



SHADED GRAY

ASHWOOD















PALLET INFORMATION

BELAIR WALL®		SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	WEIGHT/ Pallet
WS49	6 x 8 / 6 x 11	18	2	3	18	1644
	6 x 16 / 14 x 11		4	3	18	
6" SRW	6 x 8 x 8	30	3.33	3	30	2398
	6 x 16 x 8		6.66	3	15 - Face Style 1 15 - Face Style 2	
CORNER	6 x 16 x 8	_	_	2	20	1254
CAP	13½ x 7 / 8 x 3	_	-	8	144	3258
CAP	3 x 8 x 13½	_	-	2	36	1504
WALL	6 x 8 x 11	-	-	2	42	1550

Downloadable professional resources available at **Belgard.com/Resources**


QUALITY FOR LIFE

Every step of our manufacturing process incorporates rigorous research, testing and quality assurance. We demand the highest quality from each of our facilities across North America. We believe in creating world class building products that stand the test of time. See our lifetime warranty at **Belgard.com/Warranty**

FEATURES & BENEFITS

- · Look and texture of hand-chiseled stone
- Freestanding & gravity walls* can be built up to 3 feet high, including buried course
- Taller walls can be built using geosynthetic reinforcement when designed by a qualified engineer
- Rear-lip on retaining wall block makes installation fast and accurate
- Freestanding Walls: 4-foot minimum radius using all 3 units
- 1" set back/9.5 Degree system batter
- Minimum outside radius, measured on the top course to the front of the units: 4 feet
- Minimum inside radius, measured on the base course to the front of the units: 8 feet

SHAPES & SIZES

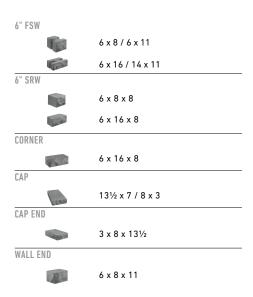

View the product page on **Belgard.com** for more information



^{*}Gravity wall heights are based on project specific conditions and may be lower than this value.