

# DIAMOND° 9D

# RETAINING







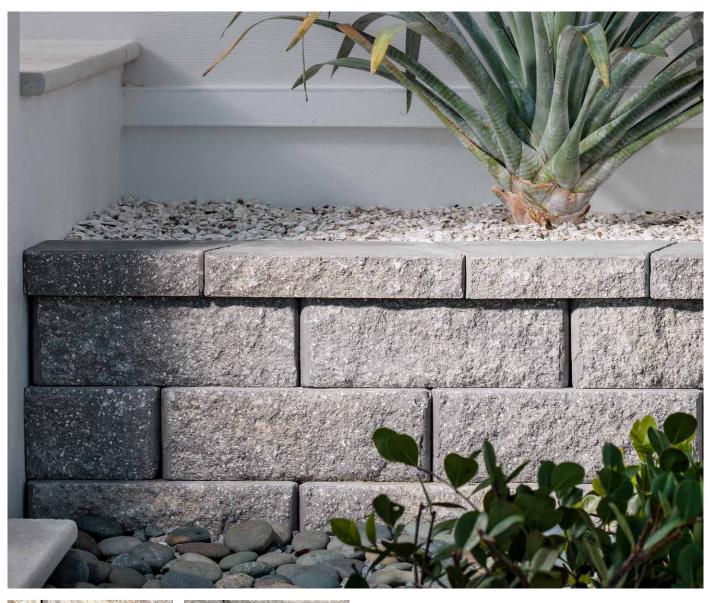



NAPOLI SLATE









# PALLET INFORMATION

DIAMOND® 9D		SQFT/ PALLET	SQFT/ LAYER	LAYER/ PALLET	UNITS/ PALLET	WEIGHT/ Pallet
ВГОСК	6 x 17¾ x 9	35.5	8.9	4	48	2379
CAP	3 x 17 / 12 x 10	-	-	-	64	2829

Downloadable professional resources available at **Belgard.com/Resources** 

#### QUALITY FOR LIFE

Every step of our manufacturing process incorporates rigorous research, testing and quality assurance. We demand the highest quality from each of our facilities across North America. We believe in creating world class building products that stand the test of time. See our lifetime warranty at **Belgard.com/Warranty** 

# FEATURES & BENEFITS

- All system components are standard-split in-line
- Rear lip locators easily establish a uniform wall batter
- Matching cap and corner completes the system
- Build gravity walls up to 3 feet high\*, including the buried course
- Taller walls can be built using geosynthetic reinforcement when designed by a qualified engineer
- Minimum outside radius, measured on the top course to the front of the units: 3 feet
- Minimum inside radius, measured on the base course to the front of the units: 6 feet
- The rear lip establishes a 11/8" setback for a 10.6 degreesystem batter

\*Gravity wall heights are based on project specific conditions and may be lower than this value.

### SHAPES & SIZES

BLOCK



6 x 17¾ x 9

CAP



3 x 17/ 12 x 10

Corner unit available. Scan product QR code for details.

View the product page on **Belgard.com** for more information

