
# DIAMOND PRO® AIR SMOOTH



A smooth face and crisp edges in a lightweight large shape offer a clean, eye-catching look for contemporary retaining walls and terraced landscapes.





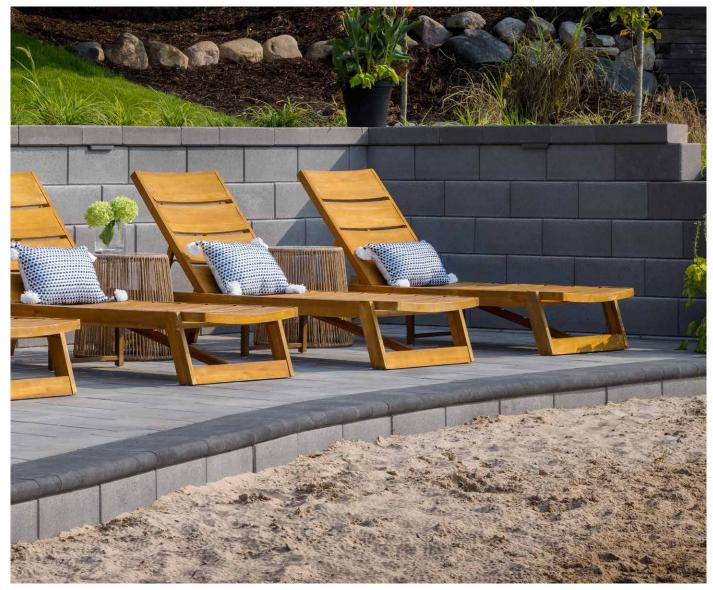



ANTHRACITE

SHADED GREY

HICKORY\* \*Special order

> Due to the natural materials in our products, colours may vary from those shown on the cut sheet. We recommend viewing actual product samples to ensure the perfect colour and finish for each project.



RETAINING COLUMNS STEPS

### PALLET INFORMATION

DIAMOND PRO° AIR Smooth		SQFT/ PALLET	SQFT/ Layer	LAYER/ PALLET	UNITS/ PALLET	WEIGHT/ Pallet
BLOCK	203 x 457 x 292mm 8 x 18 x 11½	-	-	-	-	-
CAP	102 x 457 / 305 x 330mm 4 x 18 / 12 x 13	_	-	_	_	-

Palletization details subject to manufacturing specifications

Downloadable professional resources available at **Belgard.ca/Resources** 



AN OLDCASTLE<sup>®</sup> APG OUTDOOR BRAND

ALBERTA 28234 Acheson Road Acheson, AB, T7X 6A9 Toll Free: 1.800.232.9443 ALBERTA SOUTH 260032 RR 291 Rockyview County, AB, T4A 0T8 Toll Free: 1.800.279.3728 BRITISH COLUMBIA 8910 River Road Delta BC, V4G 1B5 Toll Free: 1.800.556.9733 MANITOBA 1436 Chevrier Blvd Winnipeg, MB, R3T 1Y6 Toll Free: 1.800.262.8869

#### **QUALITY FOR LIFE**


Every step of our manufacturing process incorporates rigorous research, testing and quality assurance. We demand the highest quality from each of our facilities across North America. We believe in creating world class building products that stand the test of time. See our lifetime warranty at **Belgard.ca/Warranty** 

## FEATURES & BENEFITS

- Contemporary clean look in a lightweight large block
- Can be installed as a gravity wall or geogrid-reinforced wall.
- Weighing only 54 lbs., this 1 square foot block maximizes installation and shipping efficiencies
- Front lug design produces a %6" per unit setback for a 4° system batter
- Cores align for easy filling
- Top course is placed upside down in order to increase capping efficiency
- Ideally situated for retaining walls up to 12 feet tall
- Can be used to build gravity walls up to 3' 4" high\*, including the buried course
- Minimum outside radius, measured on the top course to the front of the units: 4 feet
- Minimum inside radius, measured on the base course to the front of the units: 6 feet

\*Gravity wall heights are based on project specific conditions and may be lower than this value.

## SHAPES & SIZES





View the product page on **Belgard.ca** for more information

nee. 1.000.330.7733 Toll Flee. 1.000.202.0007