

COMMERCIAL

PRODUCT OFFERING

MID-ATLANTIC

DELAWARE, MARYLAND, VIRGINIA
& WASHINGTON, D.C.



BELGARD
COMMERCIAL

PAVER FINISHES & APPLICATIONS

Finishes



Standard (smooth)

Unit surfaces and micro-chamfers are carefully molded using a high-quality precision machined steel shoe assembly which creates units with an extremely smooth surface and precision detailed chamfer.



Antiqued

Units are molded to form specific surface and side textures that are processed through tumbling equipment, imparting a distressed or aged appearance.



Textured (slate)

Units are molded to form a surface that emulates natural stone with a sculpted, textured finish.

DuraFusion™

DuraFusion fuses a top layer of rich pigments with Belgard's core color process. The result is a paver with a richness and purity of color that's sleek and vibrant.

DuraFusion™ + ColorTech™

DuraFusion™ + ColorTech™ multiplies the enhancement of DuraFusion™ with the protection of ColorTech™ to offer the highest quality concrete paver available today. The result is a smooth, gentle finish and vibrant color blend with unmatched protection against fading, stains and scratches.




Pedestrian

Designated for areas that are primarily for pedestrian applications including commercial plazas that may require occasional access for emergency or maintenance vehicles, as well as residential driveways.



Light Vehicles

Designated for commercial vehicular areas, access ways, and parking lots where only cars and light trucks are anticipated. Heavy vehicles should have limited access and use.

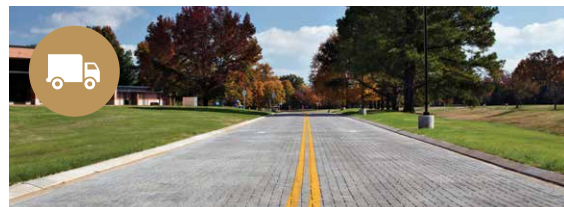

Occasional Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where limited heavy vehicles are anticipated daily such as large delivery trucks or garbage trucks.



Frequent Heavy Vehicles

Designated for vehicular areas, parking lots, and roadways where heavy vehicles are a regular component of the daily traffic volume.

Paver application icons are general recommendations. Site conditions and pavement cross section must be considered. Paver application icons are based on placement over unbound aggregates for setting beds, base and subbase.

PAVER COLORS

Blended Colors



FOSSIL BEIGE



JAMES RIVER



LINEN BEIGE



MOUNTAIN MIST



SABLE BLEND



CHESAPEAKE



JEFFERSON



POTOMAC



SANDBRIDGE



SIENNA



PEWTER BLEND



SONORAN



TUCSON



CHESWICK



HICKORY



SCANDINA GRAY



SEPIA

Accent Colors



CHOCOLATE



MIDNIGHT



SABLE BLEND



** Light colored paver has an SRI value of ≥ 29 and/or an SR value of ≥ 0.33*

DIMENSIONS™ SERIES VEHICULAR & ARCHITECTURAL PAVERS

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	FINISHES				CHAMFER WIDTH	SQ. FT. PER PALLET	
									Standard	Antiqued	DuraFusion			DuraFusion + ColorTech
DIMENSIONS™ 3-PIECE SYSTEM														
 Dimensions 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm					✓	✓				3 mm	120
 Dimensions 12	60 mm	6" x 12" 12" x 12" 12" x 18"	60 mm					✓	✓		✓	✓	3 mm	120
 Dimensions 18	60 mm	9" x 18" 18" x 18" 18" x 27"	60 mm					✓	✓		✓	✓	3 mm	112.5
 Dimensions Antiqued 3-Piece	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm							✓			N/A	120
 Dimensions Antiqued Accent	60 mm	6" x 9"	60 mm							✓			N/A	112
DIMENSIONS™ SINGLE PIECE														
 Dimensions 3" x 12"	60 mm 80 mm 101.6 mm	3" x 12"	60 mm	80 mm	101.6 mm			✓	✓		✓		3 mm	110 (60 mm) 88 (80 mm) 60 (101 mm)
 Dimensions 6" x 6" <i>(80 mm & 101.6 mm special order)</i>	60 mm 80 mm 101.6 mm	6" x 6"	60 mm	80 mm	101.6 mm			✓	✓				3mm	120 (60 mm) 96 (80 mm) 72 (101 mm)
 Dimensions 6" x 9"	60 mm 80 mm	6" x 9"	60 mm	80 mm	80 mm	80 mm		✓	✓		✓		3mm	112 (60 mm) 90 (80 mm)
 Dimensions 6" x 12" <i>(80 mm & 101.6 mm special order)</i>	60 mm 80 mm 101.6 mm	6" x 12"	60 mm	80 mm	101.6 mm	101.6 mm		✓	✓				3 mm	120 (60 mm) 96 (80 mm) 72 (101 mm)
 Dimensions 12" x 12" <i>(80 mm & 101.6 mm special order)</i>	60 mm 80 mm 101.6 mm	12" x 12"	60 mm	80 mm	101.6 mm			✓	✓				3 mm	120 (60 mm) 96 (80 mm) 72 (101 mm)
 Dimensions 24" x 36" Slab	60 mm	24" x 36"	60 mm					✓	✓		✓		3 mm	120

Secondary processes and finishes including, but not limited to, face-grinding, may impact dimensional tolerances from base dimensions. Interlocking pavers can be used for a variety of different vehicular applications. Appropriate shape and thickness is based on project-specific conditions including type of loading, base design, and subgrade conditions. It is recommended that you consult a Belgard representative in your area before specifying products for vehicular applications.



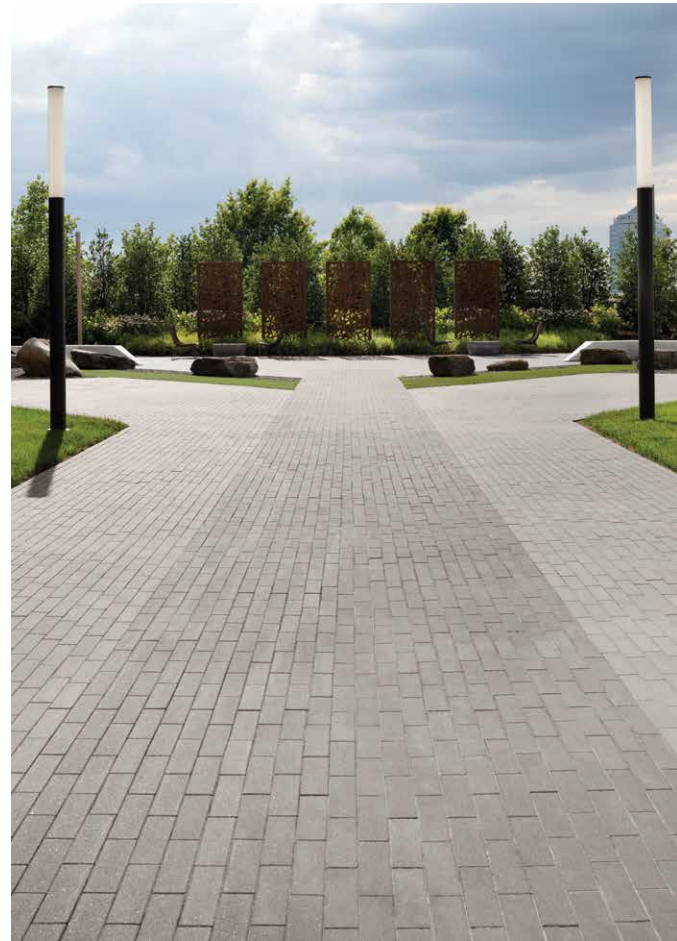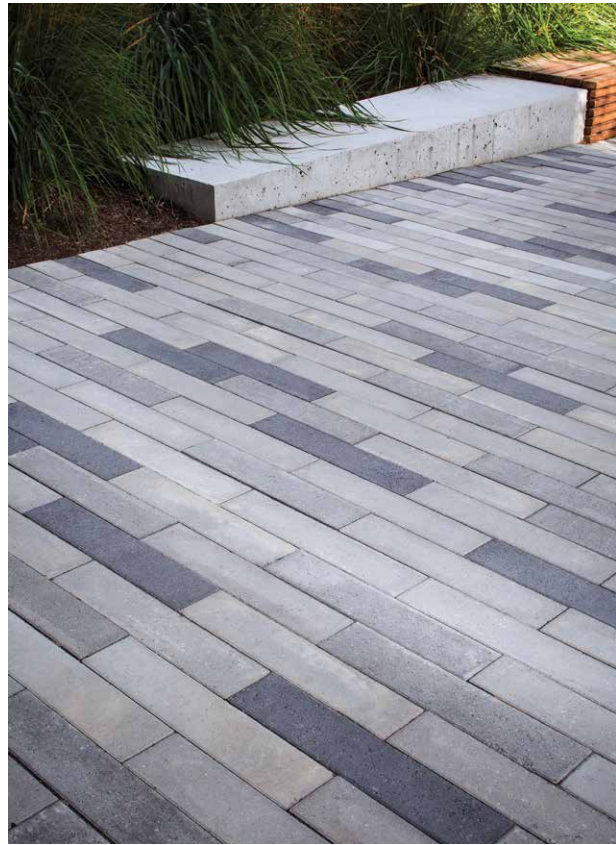









* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.










PICTURED ON SPREAD: **DIMENSIONS SERIES**




MODULAR VEHICULAR & ARCHITECTURAL PAVERS (CONT.)

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISHES			CHAMFER WIDTH	SQ. FT. PER PALLET	
									Textured	DuraFusion	DuraFusion + ColorTech			
ORIGINS™ 3-PIECE SYSTEM														
 Origins™ 6	60 mm	3" x 6" 6" x 6" 6" x 9"	60 mm				✓		✓			3 mm	120	
 Origins™ 12	60 mm	6" x 12" 12" x 12" 12" x 18"	60 mm				✓		✓	✓	✓	3 mm	120	
 Origins™ 18	60 mm	9" x 18" 18" x 18" 18" x 27"	60 mm				✓		✓	✓	✓	3 mm	112.5	
 Origins™ Accent	60 mm	6" x 9"	60 mm				✓		✓	✓		3 mm	112.5	
ADDITIONAL PRODUCTS														
 Brooklyn™	60 mm	3" x 9"	60 mm						✓	✓		N/A	99.5	
 Charlestone™	60 mm	6" x 6" 6" x 9" 6" x 12"	60 mm						✓	✓		Rolled Edge	105	


VEHICULAR & ARCHITECTURAL PAVERS

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISH	CHAMFER WIDTH	SQ. FT. PER PALLET
									Standard		
 Holland Stone	60 mm 80 mm	4" x 8"	60 mm	80 mm <i>(special order)</i>	80 mm <i>(special order)</i>	80 mm <i>(special order)</i>	✓		✓	7 mm	120 (60 mm) 96 (80 mm)

* May be Suitable for ADA applications. Always evaluate site-specific uses to ensure surface suitability. Product installation and surface maintenance influence compliance with ADA Standards for Accessible Design Section 302 Floors or Ground Surfaces. Tumbling or antiquing pavers can also create surface or edges that may make the product unsuitable for ADA applications.

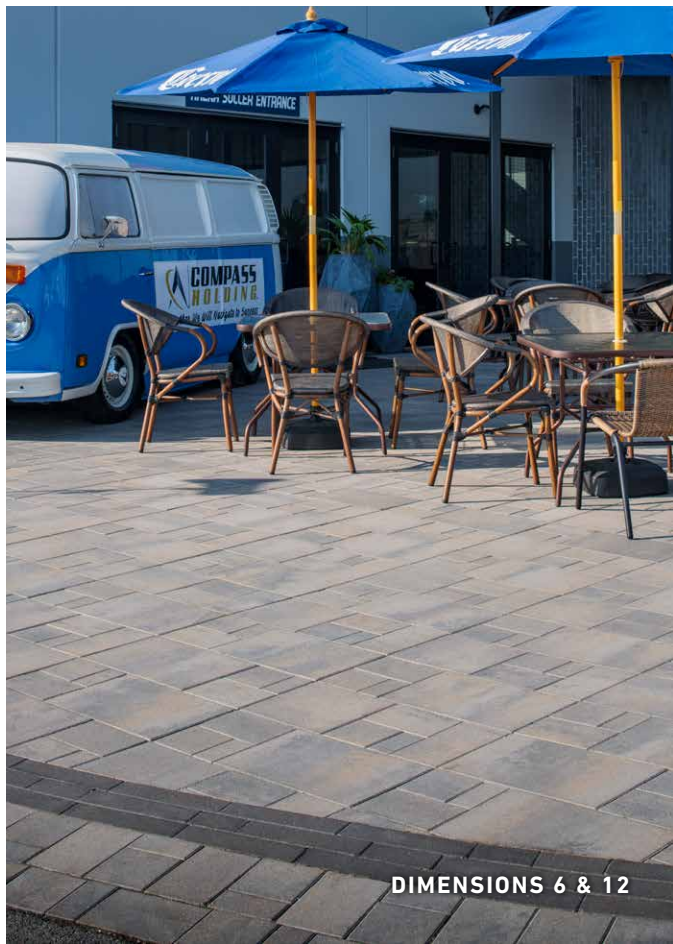

DIMENSIONS 6 & 12

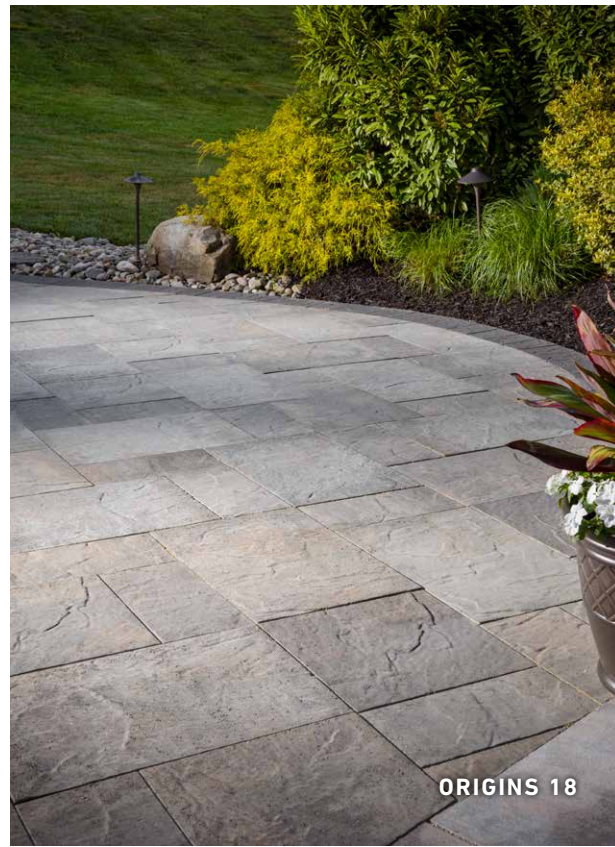

ORIGINS 18




DIMENSIONS ANTIQUED



BROOKLYN





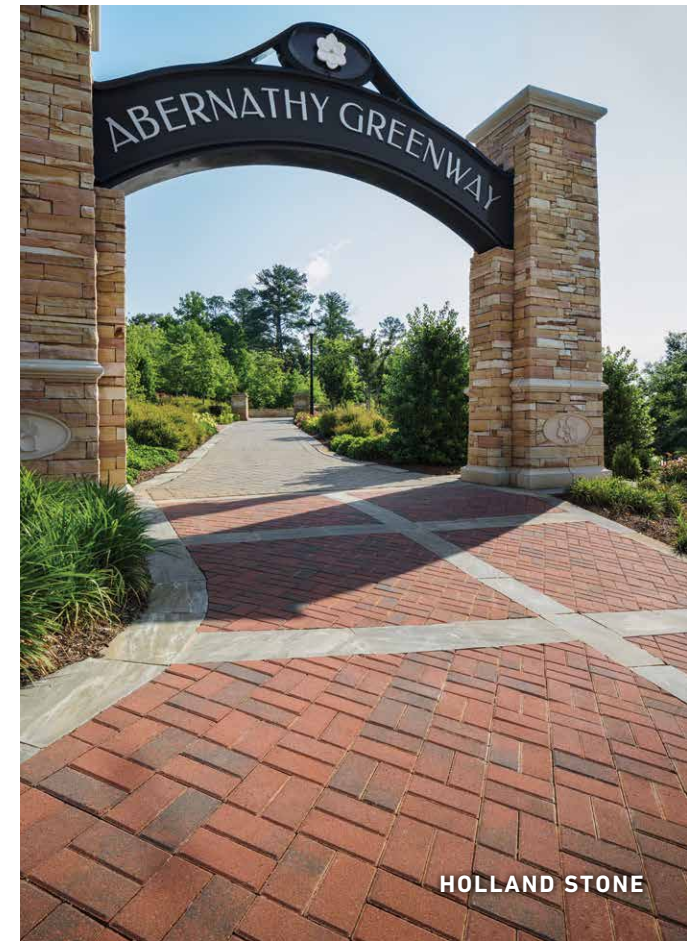







ORIGINS 12












HOLLAND STONE

PERMEABLE PAVERS









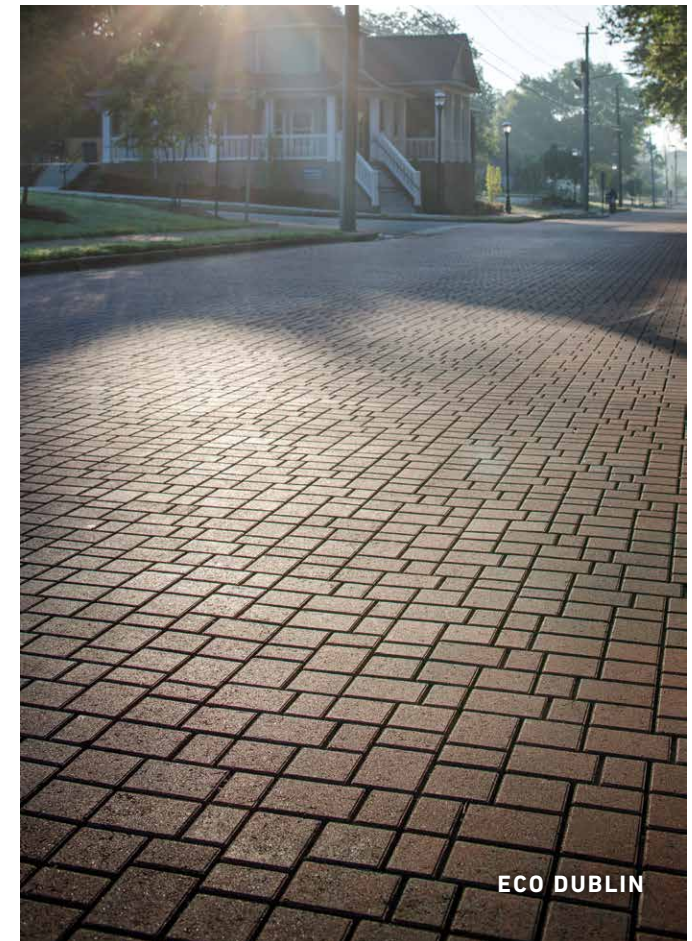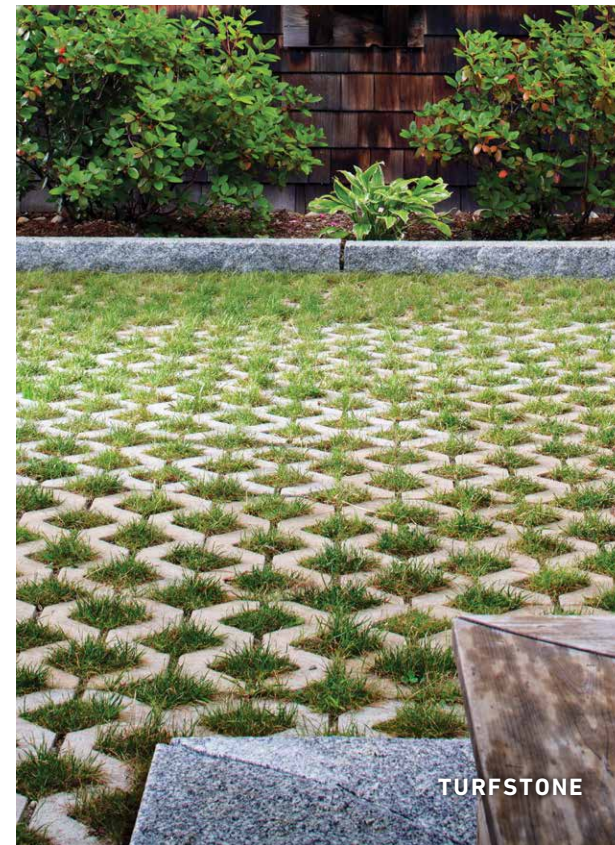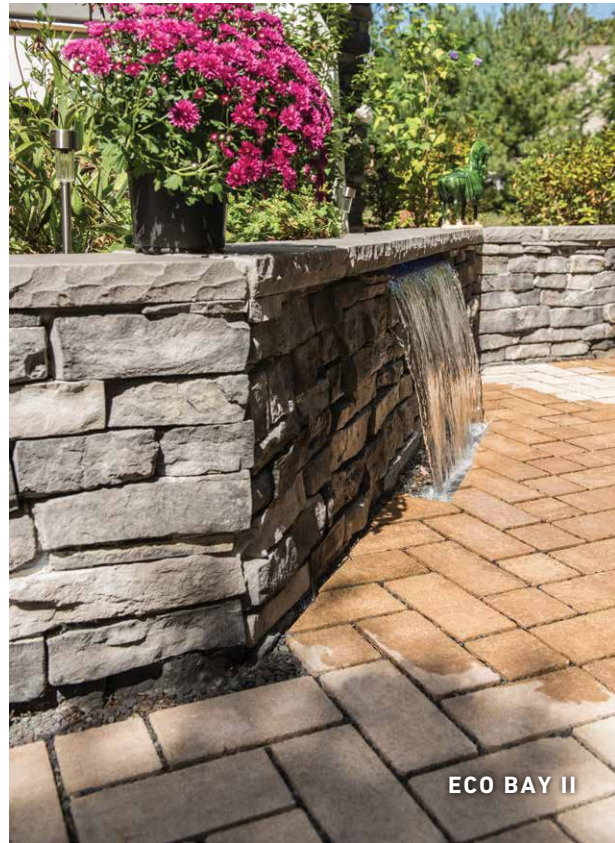

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA*	MECHANICAL INSTALL	FINISH	MANUF. JOINT WIDTH	% SURFACE OPENING	CHAMFER WIDTH	SQ. FT. PER PALLET
									Standard				
 Aqua-Bric® 4L	80 mm	9 ¹³ / ₁₆ " x 9 ¹³ / ₁₆ "	80 mm	80 mm	80 mm		✓	✓	✓	5 mm (Maintenance Void: 9 mm)	9%	3 mm	107.6
 Aqualine 4.5" x 9"	80 mm	4 ¹ / ₂ " x 9"	80 mm	80 mm	80 mm	80 mm	✓		✓	10 mm	10%	3 mm	90
 Eco Bay II	80 mm	4 ³ / ₄ " x 4 ³ / ₄ " 4 ³ / ₄ " x 9 ¹ / ₂ "	80 mm	80 mm	80 mm	80 mm	✓	✓	✓	10 mm	10%	3 mm	100.28
 Eco Dublin®	80 mm	3 ¹ / ₂ " x 6 ¹ / ₂ " 6 ¹ / ₂ " x 6 ¹ / ₂ " 6 ¹ / ₂ " x 10 ⁵ / ₁₆ "	80 mm	80 mm			✓	✓	✓	12 mm	7%	N/A	91.6

CONCRETE GRID PAVEMENTS

UNITS	THICKNESS	SIZE	APPLICATIONS				ADA	FINISH	% SURFACE OPENING	SQ. FT. PER PALLET
								Standard		
 Turfstone™	80 mm	15 ³ / ₄ " x 23 ⁵ / ₁₆ "	80 mm					✓	40%	107



PORCELAIN PAVERS

UNITS	APPEARANCE	THICKNESS	SIZE	COLOR OPTIONS	ADA	PEDESTAL APPLICATION	SQ. FT. PER PALLET	PCS. PER PALLET	PALLET WEIGHT (LBS)	
										
	Glocal - 24 x 24	Concrete	3/4"	23.54" x 23.54"	Ideal	✓	✓	232.5	60	2,160
	Glocal - 24 x 48	Concrete	3/4"	23.54" x 47.17"	Ideal	✓	✓	271.25	70	2,621
	Lagoon - 24 x 48	Stone	3/4"	23.54" x 47.17"	Moonbeam, Sandshell, Sharkskin	✓	✓	271.25	70	2,621
	Noon - 12 x 48	Wood	3/4"	11.73" x 47.17"	Daylight, Ember, Honey, Charcoal	✓	✓	155	40	1,480
	Quarziti 2.0 - 24 x 48	Stone	3/4"	23.54" x 47.17"	Mountains, Waterfall, River	✓	✓	155	20	1,480
	Quarziti 2.0 - 24 x 24	Stone	3/4"	23.54" x 23.54"	Mountains, Waterfall, River	✓	✓	32.5	60	2,160
	Silverlake - 24 x 24	Stone	3/4"	23.54" x 23.54"	Braies, Nemi, Resia	✓	✓	32.5	60	2,160
	Verona - 24 x 24	Stone	3/4"	23.54" x 23.54"	Blue Stone, Platinum, Yukon	✓	✓	232.5	60	2,160
	Unico - 13 x 24	Stone/Wood	3/4"	12.99" x 23.54"	Quarziti 2.0, Noon, Lagoon and Ardesie Colors	✓		254.82	120	2,080

If installing on elevated surface over 3/4" all porcelain must have a factory applied fiber mesh backing.

Spacers are required for all porcelain paver installations. For vehicular applications, there must be a mortar install over a concrete slab. Visit Belgard.com/porcelain for additional installation details.

ROOFTOP PAVERS & ACCESSORIES

UNITS	THICKNESS	SIZE	MATERIAL	FINISHES			PEDESTAL APPLICATION	PCS. PER PALLET	WEIGHT PER SQ. FT. (LBS)
				Smooth	Shot Blast	Diamond			
ROOFTOP PAVERS									
Classic Plaza Slab	1 7/8"	24" x 24"	Concrete	✓	✓	✓	✓	Varies 24-25 <i>Contact Belgard Representative for info</i>	23
Porcelain Plaza Pavers	3/4"	See page 14	Porcelain	✓			✓	-	-
Wood Plaza Paver	1.5"	24" x 24" 24" x 48"	Ipe Wood	✓			✓	-	5.56
ACCESSORIES									
Cubes & Cube Tops <i>(Made to order, custom sizes available)</i>	-	24" x 24" x 16 1/2" 48" x 24" x 16 1/2"	Ipe Wood or Powder Coated Aluminum	✓			✓	-	-
Pedestals - Fixed Height	-	1/4", 1/2", 3/4" height	-				✓	100 pcs per box	-
Pedestals - Adjustable	-	1 1/4" - 36" height*	-				✓	30 pcs per box	-

Classic Plaza Slab Colors



Chamois



Charcoal



Ginger



SRI White**



Cinnamon



Limestone



Natural




Red




* Higher heights require extension couplers. Additionally, heights over 24" require bracing.


**SRI Color - Solar Reflective Index in excess of 80

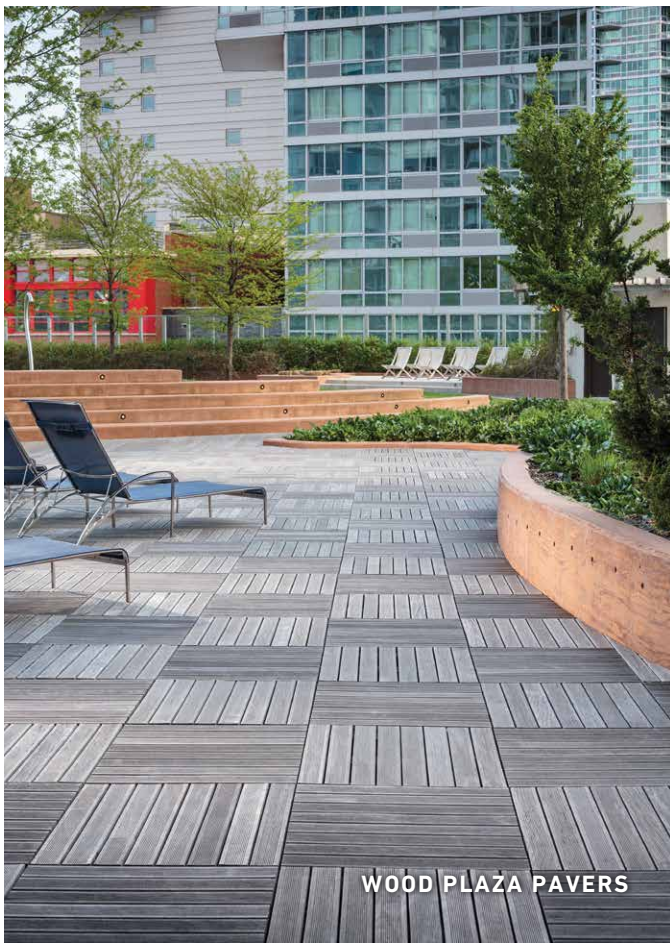

WOOD PLAZA PAVERS

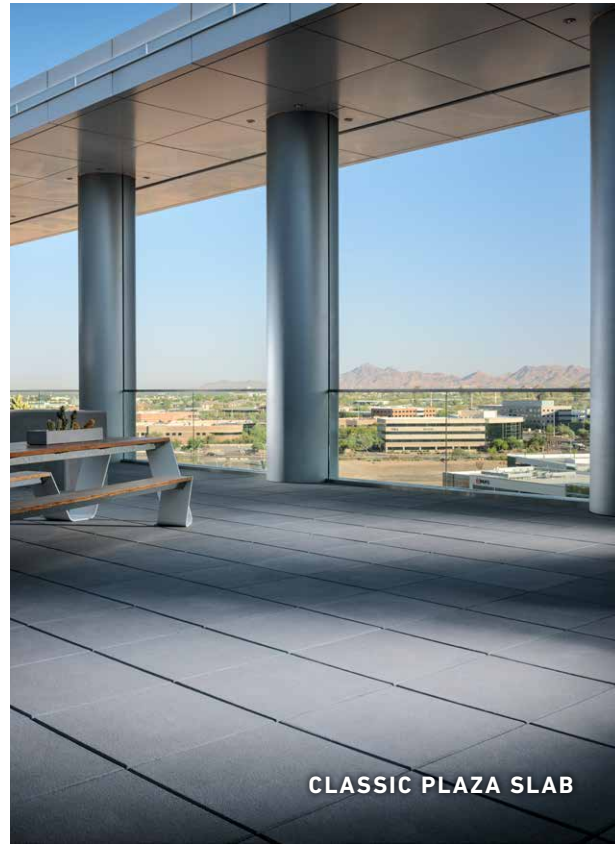

CLASSIC PLAZA SLAB

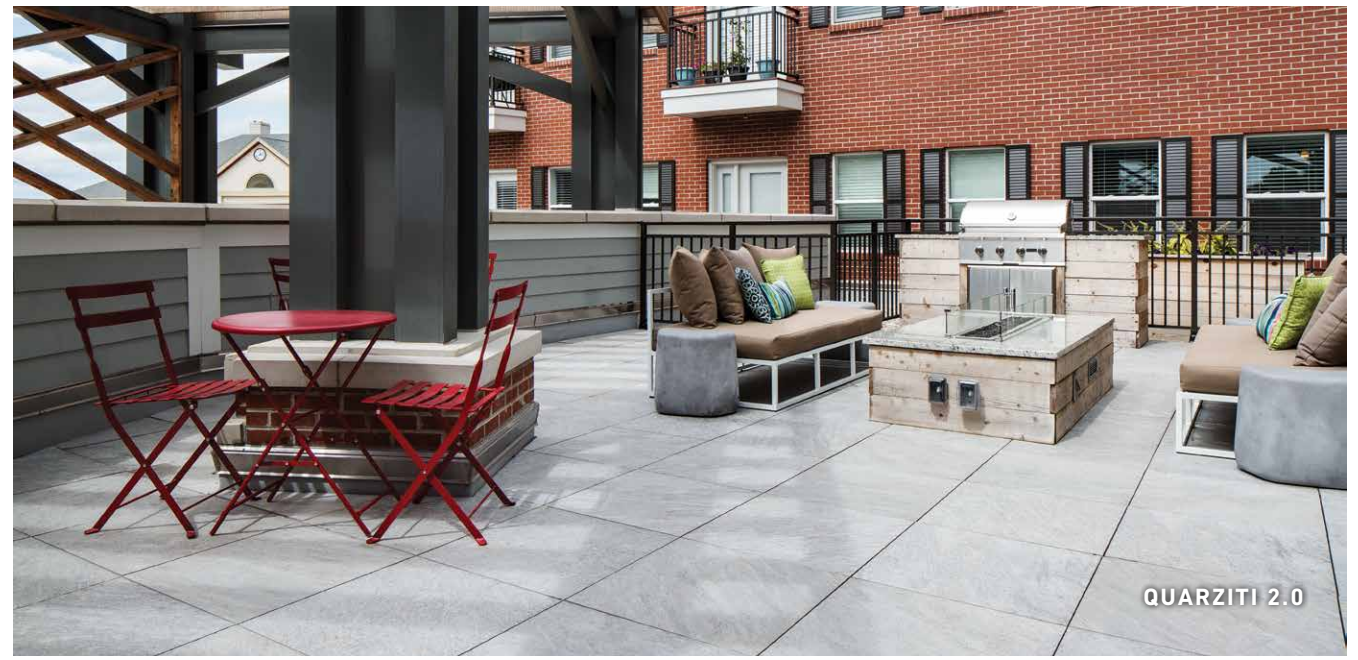


QUARZITI 2.0



GLOCAL








NOON

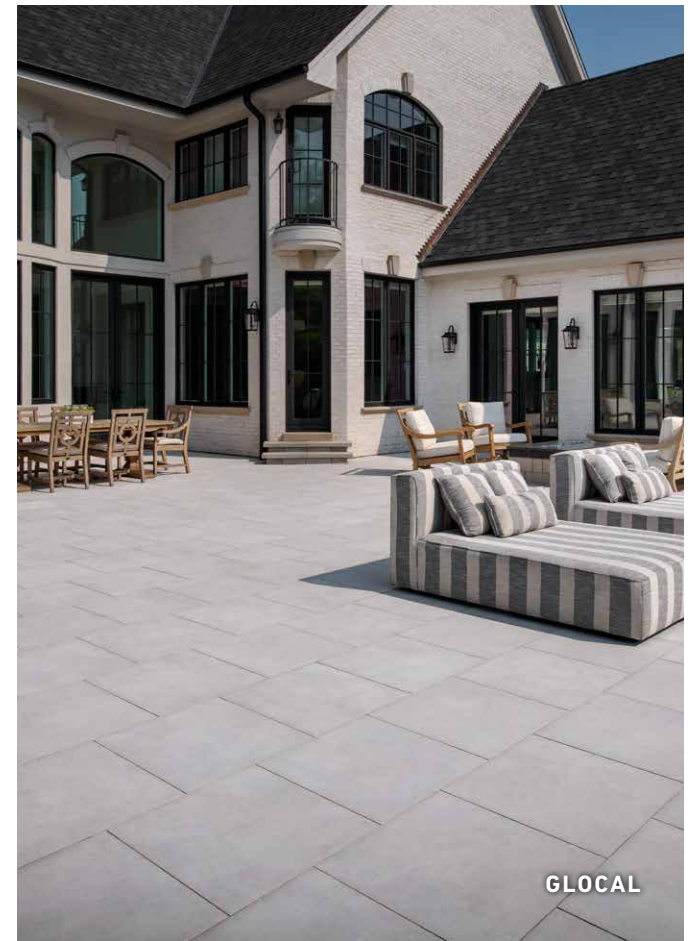




GLOCAL

SEGMENTAL RETAINING WALLS (SRW)

UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES* (SOLD SEPARATELY)		TEXTURE		FACE STYLES		BATTER/SETBACK	SQ. FT. PER PALLET
	Height	Width	Depth	Block	Other	Column/ Corner Unit	Cap	Sculpted	Split	Straight	Stone Cut		
 Ashlar Tandem™	7"	13½", 15½", 18"	3"		Polypropylene Connectors		✓	✓				0/4°	70
 Diamond® 10 DS	6"	17¼"	10"	Rear Lip			✓		✓		✓	10.6°	43.2
 Diamond Pro®	8"	18"	12"	Rear Lip		✓	✓				✓	7.1°; 1" Per Course	48
 Diamond Pro® PS Straight Face	8"	18"	12"		Fiberglass Pin	✓	✓		✓	✓		1.7° or 7.1°	48
 Vertica®	8"	18"	11"	Surface Lug		✓	✓		✓	✓		4°	36

ARCHITECTURAL SINGLE & DOUBLE SIDED WALLS

UNITS	UNIT SIZE			CONNECTION TYPE		ACCESSORIES* (SOLD SEPARATELY)		TEXTURE		FACE STYLES		BATTER/SETBACK	SQ. FT. PER PALLET
	Height	Width	Depth	Block	Other	Column/ Corner Unit	Cap	Sculpted	Split	Straight	Stone Cut		
 Highland Stone® Retaining Wall	6"	6", 12", 18"	12"	Rear Lip			✓		✓		✓	10.6°	24
 Highland Stone® Freestanding Wall	6"	6", 12", 18"	9"			✓	✓		✓		✓	Vertical	27
 Melville™ Wall <i>(limited to 24" gravity)</i>	4"	20"	10"							✓		Vertical	26.6

WALL COLORS

Diamond® 10 DS



CHESAPEAKE



JAMES RIVER



JEFFERSON

Diamond Pro® & Diamond Pro® PS Straight Face



BRITTANY BLEND



GRAY



JAMES RIVER



SABLE BLEND

Highland Stone® Retaining Wall



CHESAPEAKE



JAMES RIVER



JEFFERSON



POTOMAC

Melville™ Wall



CHESWICK




SANDBRIDGE




SCANDINA GRAY




MIDNIGHT

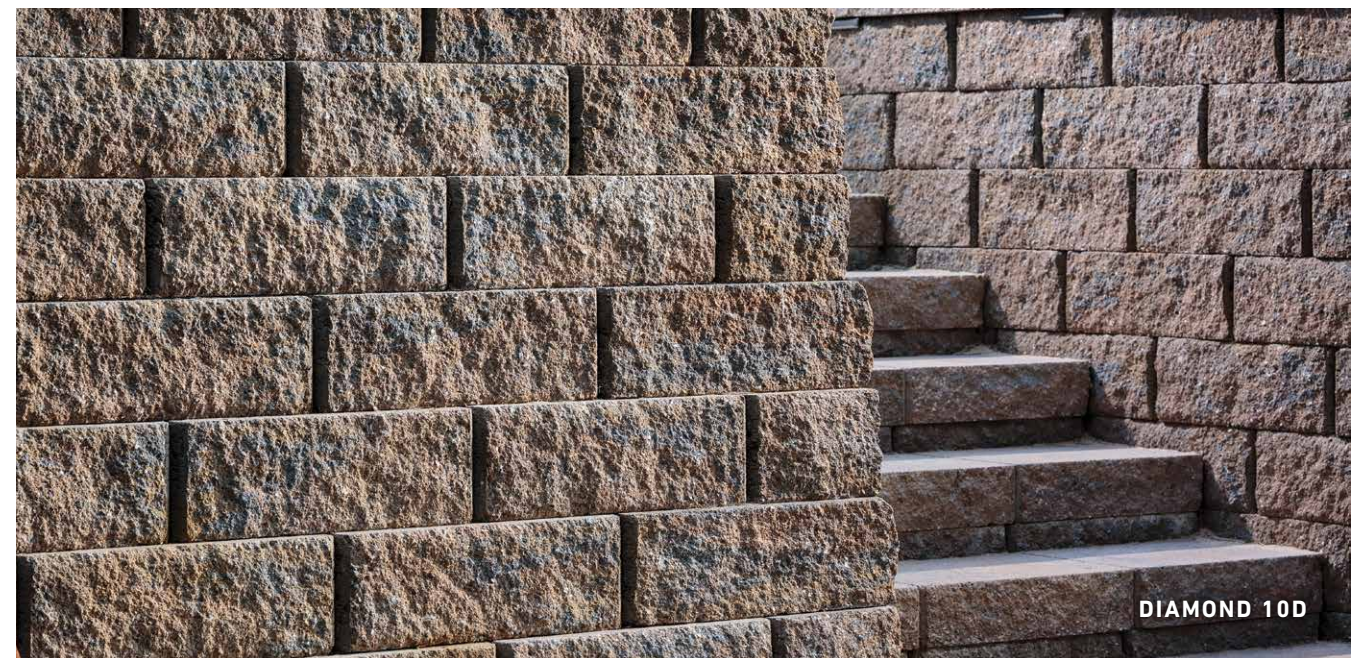

DIAMOND 10D

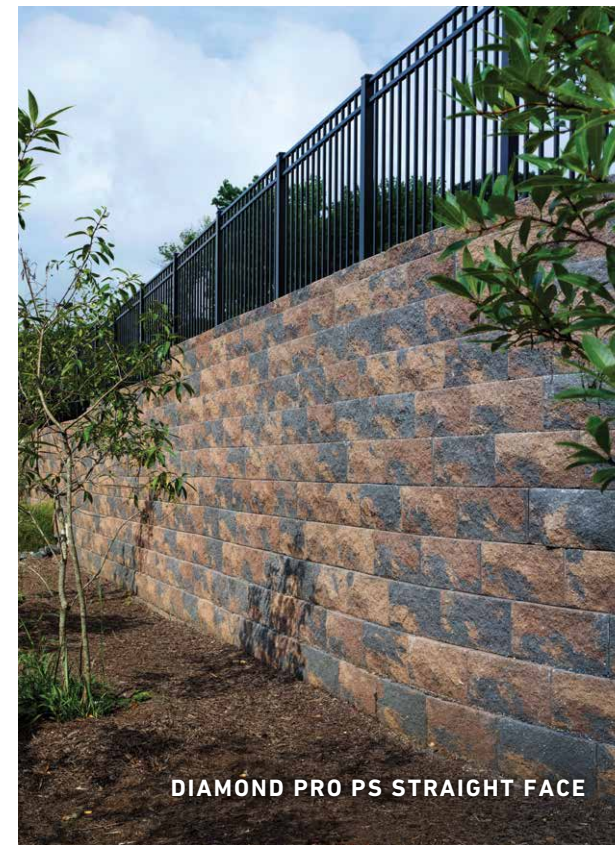


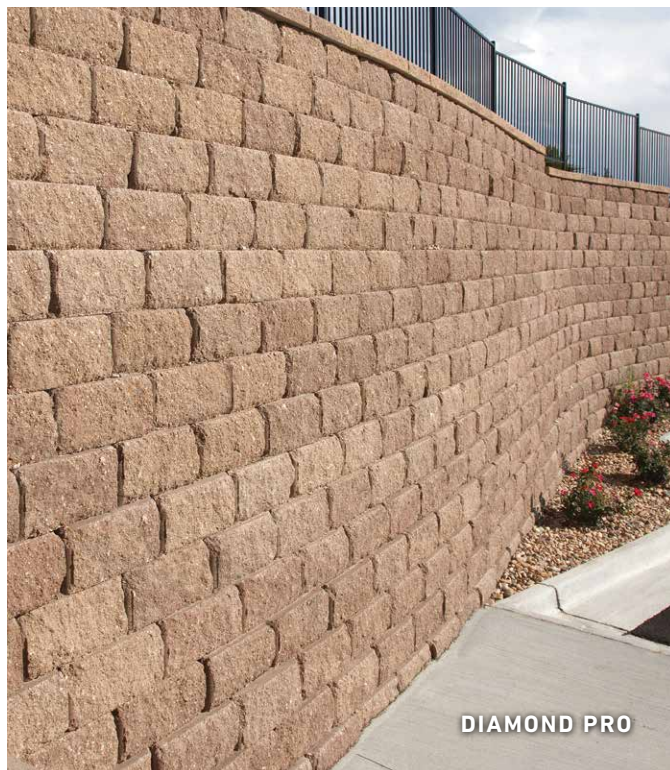
DIAMOND PRO PS STRAIGHT FACE

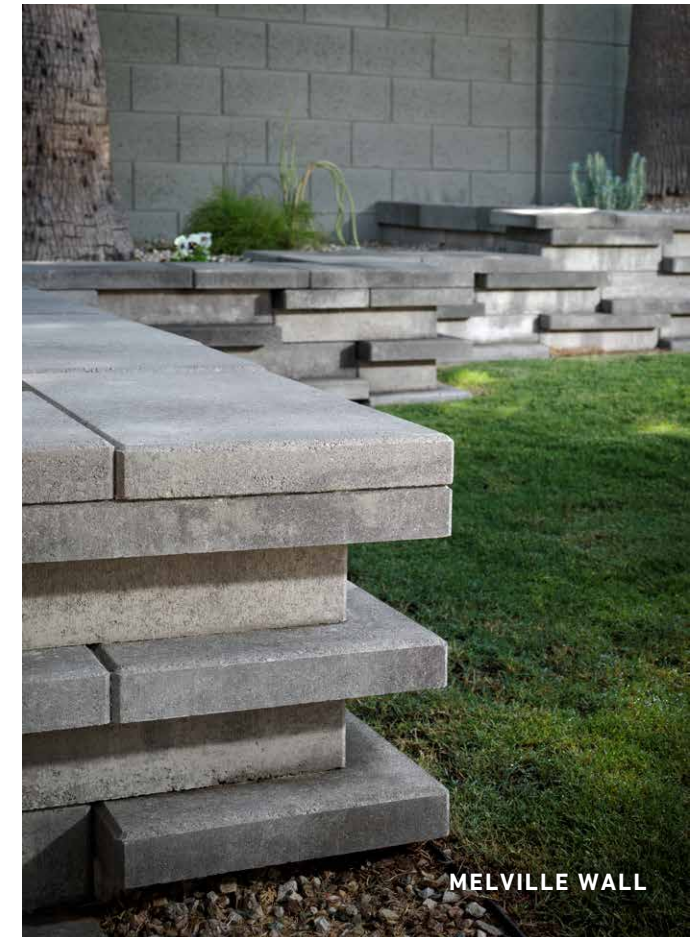


MELVILLE WALL

COMPLEMENTARY PRODUCTS

PRODUCT	SIZE	PALLET INFORMATION
 3" Double Sided Universal Cap	3" x 17¼" x 10⅝"	48 units per pallet
 4" Universal Cap	4" x 16"/14" x 10¼"	48 units per pallet
 4" Universal Cap	4" x 12" x 16"	60 units per pallet
 6" Corner	6" x 18" x 9"	40 units per pallet
 8" Corner	8" x 18" x 9"	40 units per pallet
 Landings™ Step Unit	6" x 48" x 18"	2 units per pallet
 Melville™ Cap	2" x 20" x 13"	60 units per pallet
 Tandem® Cap	3¼" x 24" x 15"	32 units per pallet
 U Start Base Block®	Full Unit = 18½" x 12" x 3½" As Laid Unit = 16⅞" x 12" x 3½"	56 units per pallet
 XL™ Cap	3" x 18 /12" x 13"	72 units per pallet



DIAMOND PRO

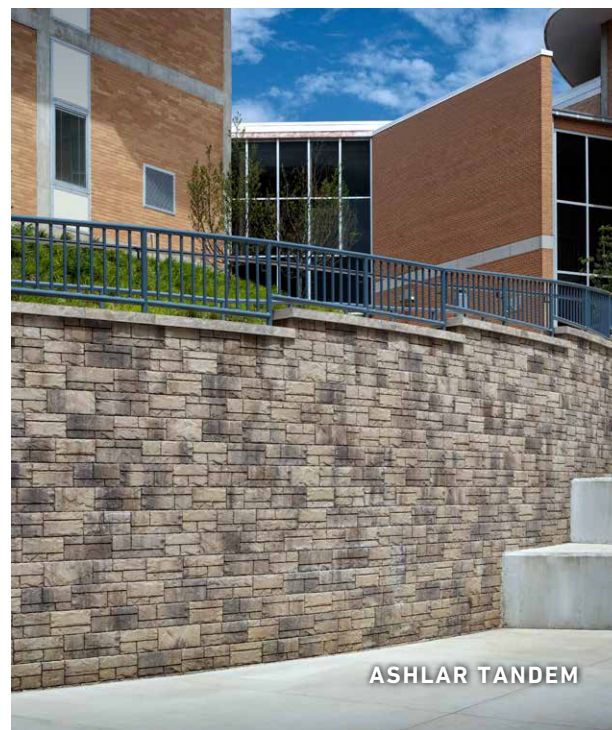

ASHLAR TANDEM

PROFESSIONAL SUPPORT



ENVIRONMENTAL SOLUTIONS

Belgard consultants can work with your team to develop the best PICP system design or retaining wall configuration to control runoff volume and discharge rates, improve the quality of local groundwater, reduce or prevent downstream impacts, and minimize the land consumed for stormwater management.



CAD FILES

For your convenience, Belgard offers a constantly expanding library of easy-to-download CAD files of our products and patterns.



CONTINUING EDUCATION

Belgard offers a variety of ongoing educational programs for our industry partners, including Lunch & Learns, online CEU courses, and our Belgard University training program.



SITE PLANNING

The experts at Belgard can help you optimize your site in a number of ways—whether you're looking for creative ways to define public spaces, manage or harvest stormwater, or increase the useable space for development.



ENGINEERING SERVICES

Our team of design consultants can help address both aesthetic and engineering design concerns, material quantity estimates and permit ready plans.

MID-ATLANTIC LOCATIONS



2630 Conway Road
Odenton, MD 21113

1231 Willis Road,
Richmond VA 23237

Belgardcommercial.com | Ph: 800-321-9141



[BELGARDCOMMERCIAL.COM](https://www.belgardcommercial.com)