
DIAMOND PRO PS


STRAIGHT FACE RETAINING WALL

SPLIT-STONE TEXTURE AND CLEAN EDGES PROVIDE A COST-EFFECTIVE, CLASSIC LOOK FOR LARGE WALLS





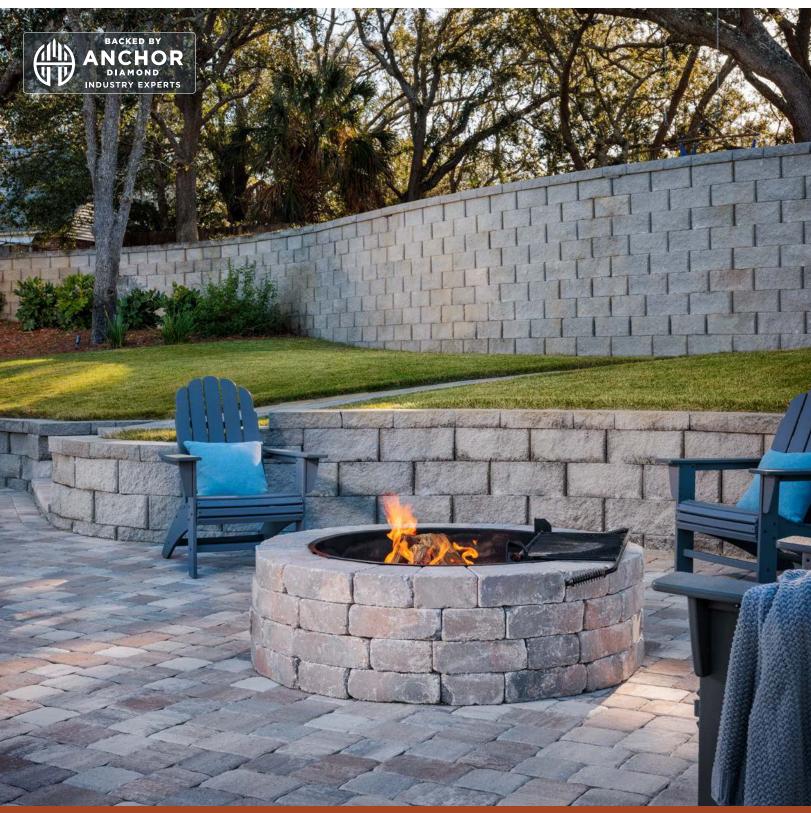

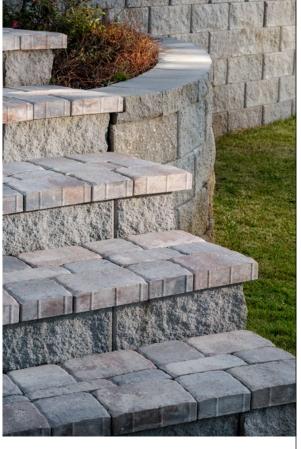

*Gravity wall heights are based on project specific conditions and may be lower than this value.

Check with your local Belgard Representative for product availability and color options.

DIAMOND PRO PS

STRAIGHT FACE RETAINING WALL

SPLIT-STONE TEXTURE AND CLEAN EDGES PROVIDE A COST-EFFECTIVE, CLASSIC LOOK FOR LARGE WALLS

○ FEATURES & BENEFITS

- Pin system installation method
- · Large cores for ease in handling
- Ease of installation with oversized pin aligning cores
- Pin cores allow for multiple batter options
- Builds walls in excess of 50 feet when combined with geosynthetic reinforcement
- One square foot of wall face per block
- Gravity walls can be built up to 4 feet high*, including the buried course, with 7.1 degree batter
- Minimum outside radius, measured on the top course to the front of the units: 4 feet
- Minimum inside radius, measured on the base course to the front of the units: 6 feet
- Setback/System Batter: Near Vertical and 1"/7.1°; additional system batter can be created by alternating pin placement on each course of wall

SHAPES & SIZES

BLOCK



8 x 18 x 12

ANCHOR™ PINS



5"L x 0.5" Diameter

CAP



4 x 171/4 /12 x 103/8

CORNER



8 x 18 x 9











Revised: 01/17/23 BEL22-412

