
# DIAMOND PRO® PS QUARRIED FACE RETAINING WALL

THE LOOK OF NATURAL QUARRIED STONE WITH THE TIME-TESTED STRENGTH OF DIAMOND PRO





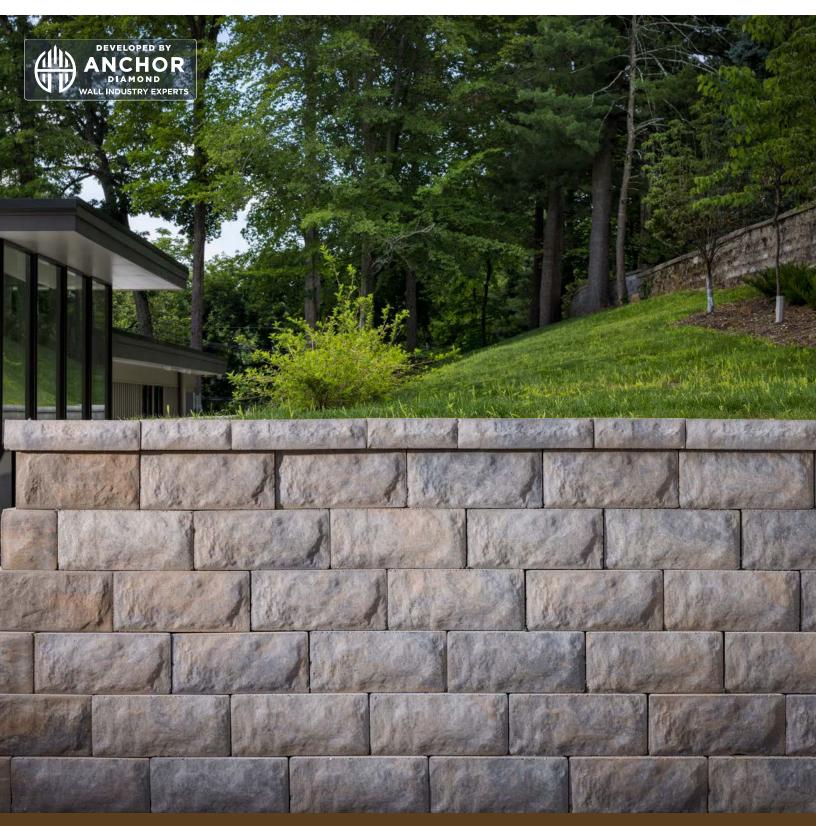

## ▲ AVAILABLE COLORS



DANVILLE BLEND





#### SABLE BLEND




# **DIAMOND PRO**<sup>®</sup>**PS** QUARRIED FACE RETAINING WALL

THE LOOK OF NATURAL QUARRIED STONE WITH THE TIME-TESTED STRENGTH OF DIAMOND PRO

## 

- Pin system installation method
- Large cores for ease in handling
- Ease of installation with oversized pin aligning cores
- Pin cores allow for multiple batter options
- Builds walls in excess of 50 feet when combined with geosynthetic reinforcement
- One square foot of wall face
  per block
- Gravity walls can be built up to 4 feet high\*, including the buried course, with 7.1 degree batter
- Minimum outside radius, measured on the top course to the front of the units: 4 feet
- Minimum inside radius, measured on the base course to the front of the units: 6 feet
- Setback/System Batter: Near Vertical and 1"/7.1°; additional system batter can be created by alternating pin placement on each course of wall



© 2022 Oldcastle APG, Inc, A CRH Company, All Rights Reserved. Revised: 03/15/23 BEL22-412\_APG NE

For more info, visit Belgard.com