

# DIAMOND°9D

RETAINING WALL

A LIGHTWEIGHT SOLUTION FOR SEGMENTAL RETAINING WALLS WITH A WEATHERED STONE LOOK



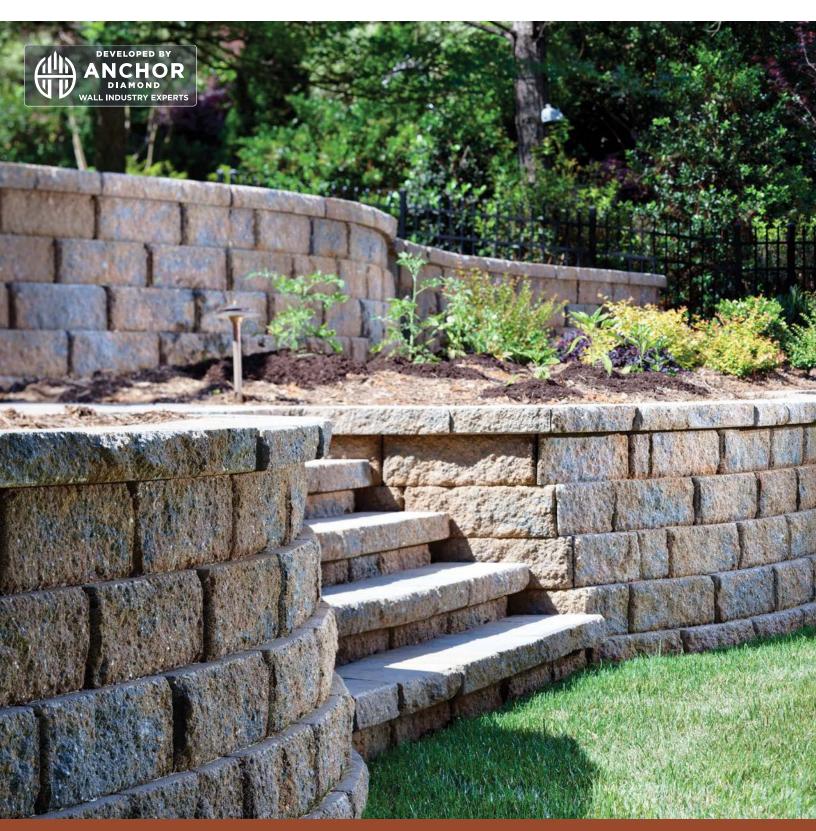

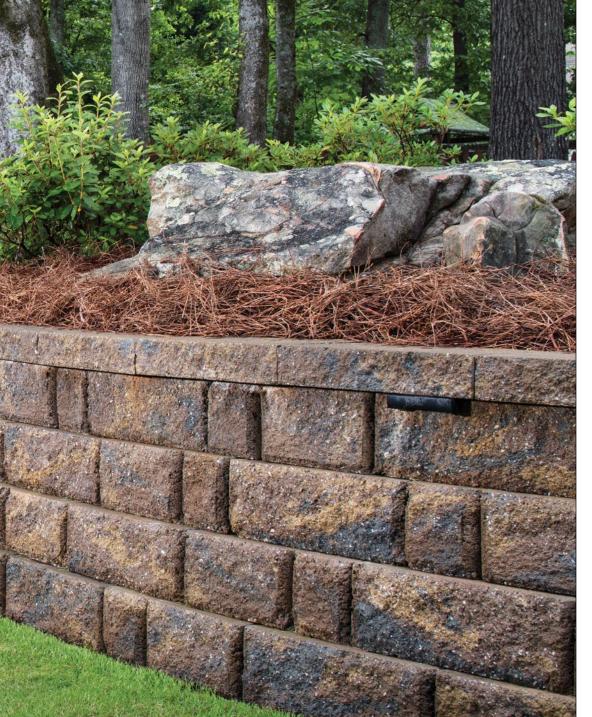

# DIAMOND'9D

RETAINING WALL

A LIGHTWEIGHT SOLUTION FOR SEGMENTAL RETAINING WALLS WITH A WEATHERED STONE LOOK

### **⊙** FEATURES & BENEFITS

- All system components are standard-split in-line
- Rear lip locators easily establish a uniform wall batter
- A matching cap completes the
- Build gravity walls up to 3 feet high\*, including the buried course.
- Taller walls can be built using geosynthetic reinforcement when designed by a qualified engineer.
- · Minimum outside radius, measured on the top course to the front of the units: 3 feet
- · Minimum inside radius, measured on the base course to the front of the units: 6 feet
- The rear lip establishes a 11/8" setback for a 10.6 degree system batter

## **♦** AVAILABLE COLORS





DANVILLE BIEGE





LUEDERS GRAY

# ♣ SHAPES & SIZES STRAIGHT FACE



6 x 17¾ x 9

#### VIRTUAL JOINT



6 x 17¾ x 9

#### CAP



3 x 171/4 / 103/8 x 9













BAYOU BLEND