
AQUALINE 4.5 X 9

PERMEABLE PAVER | 80MM












TOSCANA VICTORIAN

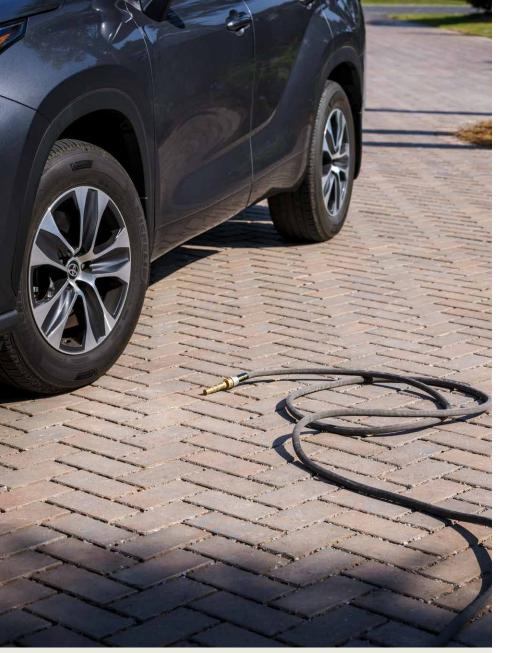





MECHANICAL

QUALITY FOR LIFE

Every step of our manufacturing process incorporates rigorous research, testing and quality assurance. We demand the highest quality from each of our facilities across North America. We believe in creating world class building products that stand the test of time. See our lifetime warranty at **Belgard.com/Warranty**

FEATURES & BENEFITS

- · Interlocking spacer bars for increased structural performance
- Smooth surface with a microchamfer to minimize vibration and enhance wheelchair comfort
- Can be utilized to construct an ADA-compliant pavement
- True installed dimensions for design optimization
- · Optimal joint openings for infiltration and maintenance
- Can eliminate stormwater runoff and improve water quality
- · Meets the requirements of ASTM C936
- Chamfer Width: 3 mm
- Spacer Bar Width: 10 mm
- Surface Infiltration Rate: > 500 inches per hour (varies based on joint infill gradation)
- Surface Open Area: 12%
- · Can be installed mechanically with herringbone pallet layout

SHAPES & SIZES

80MM



41/2 x 9 x 31/8

PALLET INFORMATION

AQUALINE™		SQFT/	UNITS/	SQFT/	LAYER/	WEIGHT/
		PALLET	LAYER	LAYER	PALLET	Pallet
80MM	4½ x 9 x 3⅓	90	44	11.25	8	3052

Downloadable professional resources available at Belgard.com/Resources

View the product page on Belgard.com for more information

