
AQUALINE™

PERMEABLE PAVER | 80MM

An environmentally friendly choice with a smooth surface and crisp, clean lines for stunning timeless designs.





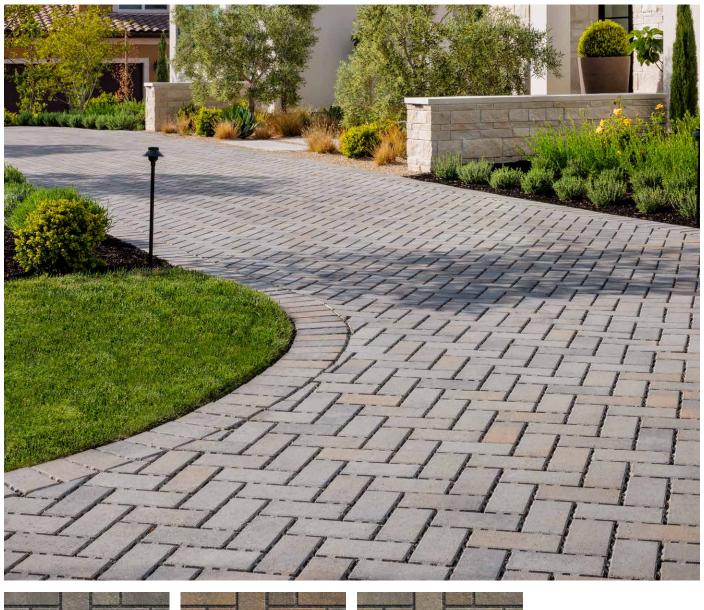





RIO

TOSCANA

VICTORIAN











PERMEABLE INSTALL

PALLET INFORMATION

| AQUALINE™ | | SQFT/ PALLET | UNITS/ LAYER | SQFT/ LAYER | LAYER/ PALLET | WEIGHT/ PALLET | |
|-----------|-------------|-----------------|-----------------|----------------|------------------|-------------------|--|
| 80MM | 4½ x 9 x 3⅓ | 90 | 40 | 11.25 | 8 | 3100 | |

Downloadable professional resources available at Belgard.com/Resources

QUALITY FOR LIFE

Every step of our manufacturing process incorporates rigorous research, testing and quality assurance. We demand the highest quality from each of our facilities across North America. We believe in creating world class building products that stand the test of time. See our lifetime warranty at **Belgard.com/Warranty**

FEATURES & BENEFITS

- Interlocking spacer bars for increased structural performance
- · Smooth surface with a micro- chamfer to minimize vibration and enhance wheelchair comfort
- Can be utilized to construct an ADA-compliant pavement
- True installed dimensions for design optimization
- Optimal joint openings for infiltration and maintenance
- · Can eliminate stormwater runoff and improve water quality
- Meets the requirements of ASTM C936
- Chamfer Width: 3 mm
- Spacer Bar Width: 10 mm
- Surface Infiltration Rate: > 500 inches per hour (varies based on joint infill gradation)
- Surface Open Area: 12%
- · Can be installed mechanically with herringbone pallet layout
- · Approved for vehicular applications

SHAPES & SIZES

80MM



4½ x 9 x 31/8

View the product page on Belgard.com for more information

