
AQUALINE™

PERMEABLE PAVER | 80MM

An environmentally friendly choice with a smooth surface and crisp clean lines for stunning contemporary and traditional designs.





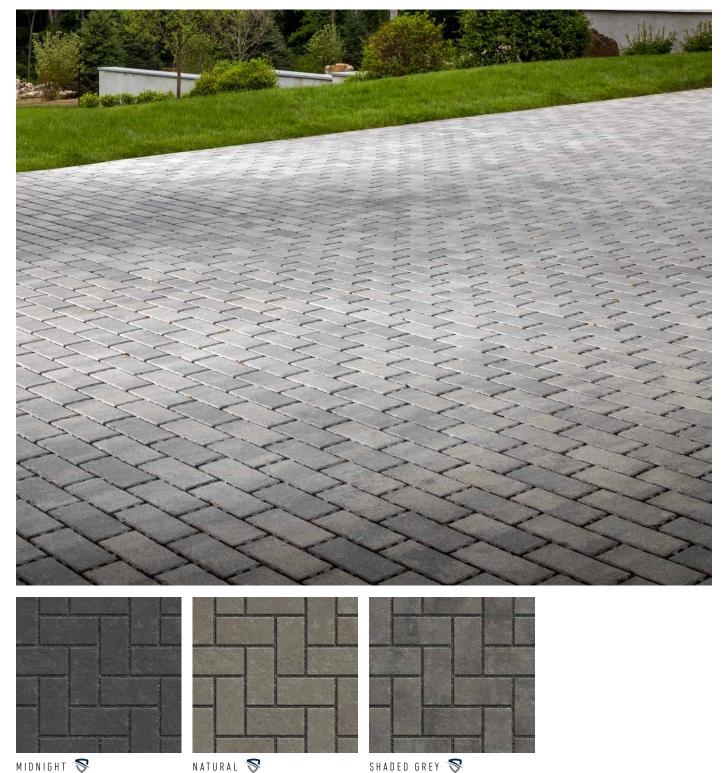

QUALITY FOR LIFE

Every step of our manufacturing process incorporates rigorous research, testing and quality assurance. We demand the highest quality from each of our facilities across North America. We believe in creating world class building products that stand the test of time. See our lifetime warranty at **Belgard.ca/Warranty**

FEATURES & BENEFITS

- Interlocking spacer bars for increased structural performance
- Smooth surface with a microchamfer to minimize vibration and enhance wheelchair comfort
- Can be utilized to construct an ADA-compliant pavement
- True installed dimensions for design optimization
- Optimal joint openings for infiltration and maintenance
- Can eliminate stormwater runoff and improve water quality
- Meets the requirements of ASTM C936
- · Chamfer Width: 3 mm
- Spacer Bar Width: 10 mm
- Surface Infiltration Rate: > 500 inches per hour (varies based on joint infill gradation)
- Surface Open Area: 12%
- Can be installed mechanically with a herringbone pallet layout



DURAFUSION" TECHNOLOGY
Refined texture with enhanced wear-resistance

SHAPES & SIZES

PAVER



110 x 221.5 x 80mm 45/16 x 83/4 x 31/8"

PALLET INFORMATION

DRIVEWAY

COMPLIANT

DURAFUSION"

AQUALINE™		SQFT/	UNITS/	SQFT/	LAYER/	WEIGHT/
		PALLET	LAYER	LAYER	PALLET	Pallet
PAVER	110 x 221.5 x 80mm 45/16 x 83/4 x 31/8"	73.7	-	10.5	7	1225 kg / 2700 lbs

MECHANICAL

PERMEABLE

Downloadable professional resources available at **Belgard.ca/Resources**

View the product page on **Belgard.ca** for more information

