


ECO DUBLIN®

3-Piece Permeable | 80mm

The gently distressed surface and antiqued edges offer eco-friendly sophistication. Its hand-laid stone design and natural blends deliver a time-worn classic look.

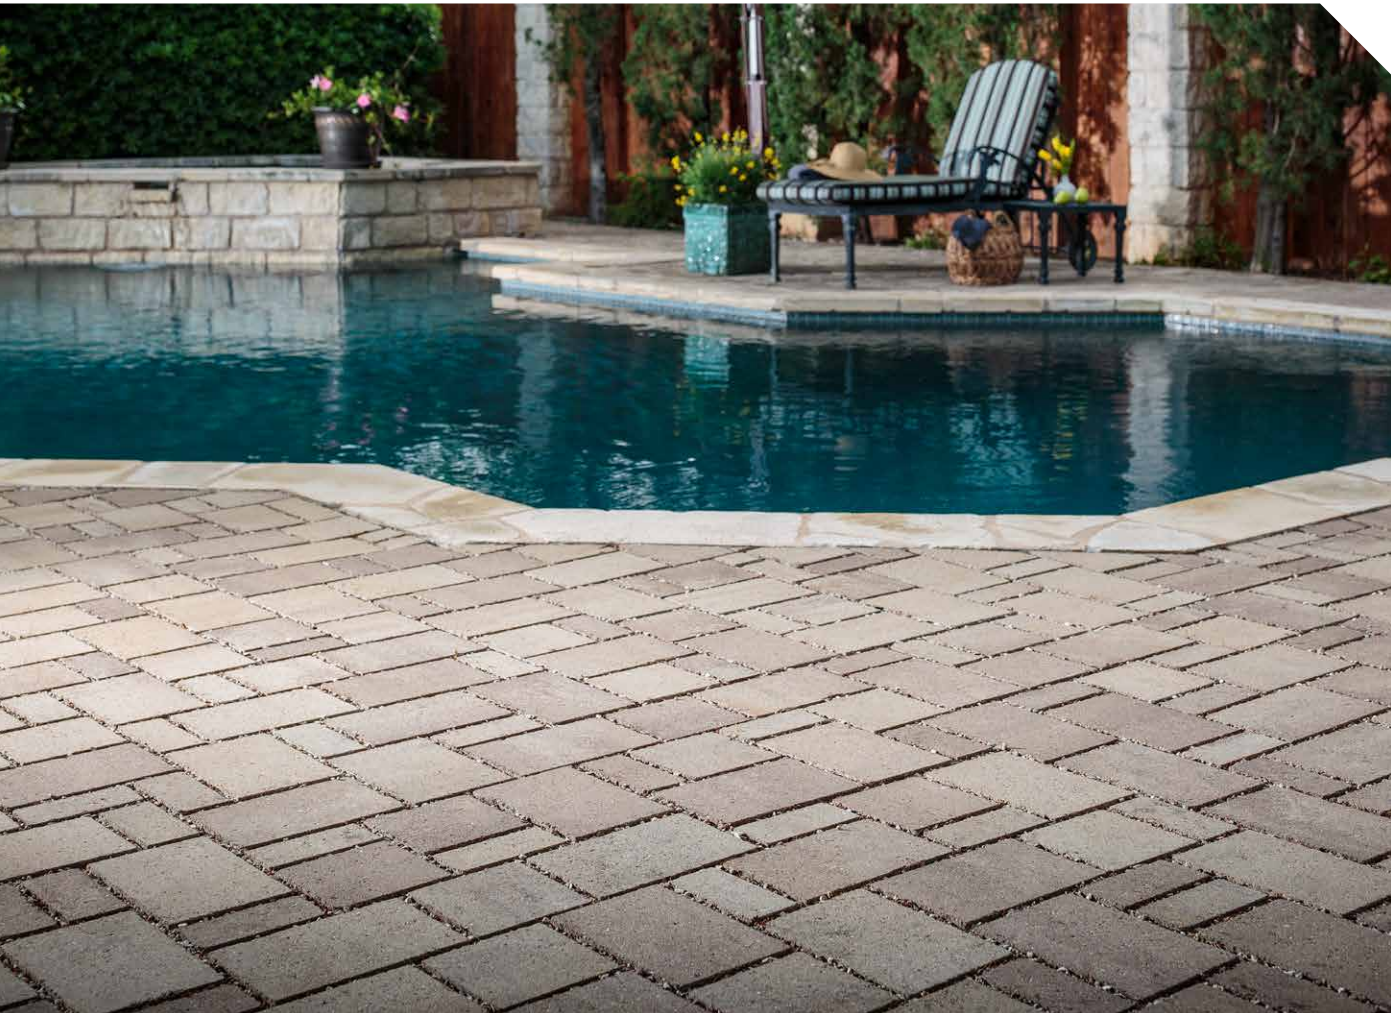

DRIVEWAY
APPROVED



ACCESSIBLE
SURFACE



PERMEABLE
APPLICATION



MECHANICAL
INSTALL

PALLET INFORMATION

ECO DUBLIN®		SQFT/ PALLET	UNITS/ LAYER	SQFT/ LAYER	LAYER/ PALLET	WEIGHT/ PALLET
3-PIECE 80MM	3½ x 6¹⁵⁄₁₆ x 3⅜	91.6	15	11.45	8	3155
	6¹⁵⁄₁₆ x 6¹⁵⁄₁₆ x 3⅜		8			
	10⁵⁄₁₆ x 6¹⁵⁄₁₆ x 3⅜		13			

SHAPES & SIZES

3-PIECE | 80MM



3½ x 6¹⁵⁄₁₆ x 3⅜



6¹⁵⁄₁₆ x 6¹⁵⁄₁₆ x 3⅜



10⁵⁄₁₆ x 6¹⁵⁄₁₆ x 3⅜



DANVILLE BEIGE




LUEDERS GRAY

LEARN MORE

View the product page on **Belgard.com** for more information



PALLET LAYOUT

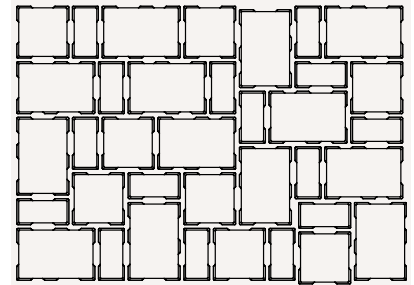

TECHNICAL SPECS

- Can eliminate stormwater runoff and improve water quality
- Meets the requirements of ASTM C936
- Optimal joint openings for infiltration
- Joint Width: 12 mm
- Initial Surface Infiltration Rate: >500 inches per hour (varies based on joint infill gradation)
- Surface Open Area: 7%
- Can be mechanically or manually installed
- Can be used to construct ADA-compliant pavement
- Can be used for a variety of vehicular applications, depending on type of loading, base design, and subgrade conditions. Consult a Belgard Representative when specifying for vehicular applications.

QUALITY FOR LIFE

Every step of our manufacturing process incorporates rigorous research, testing and quality assurance. We demand the highest quality from each of our facilities across North America. We believe in creating world-class building products that stand the test of time. See our lifetime warranty at **Belgard.com/Warranty**

Due to the natural materials in our products, colors may vary from those shown on the cut sheet. We recommend viewing actual product samples to ensure the perfect color and finish for each project.